


# CSE 333

## Lecture 1 - Intro, C refresher

**Hal Perkins**

Department of Computer Science & Engineering

University of Washington



# Welcome!

Today's goals:

**introductions**

*course syllabus*

*quick C refresher*

# Introductions

Us (cse333-staff@cs - please use this address, not individual email)

Hal Perkins (Instructor)

Phillip Quinn (TA)

Soumya Vasisht (TA)

Jack Xu (TA)

Most important: You!!

Anyone still trying to register or add the class?

# Welcome!


Today's goals:

*introductions*

**course syllabus (highlights only - read the whole thing on the web [yes, really do read it])**

*quick C refresher*

# Course map: 100,000 foot view

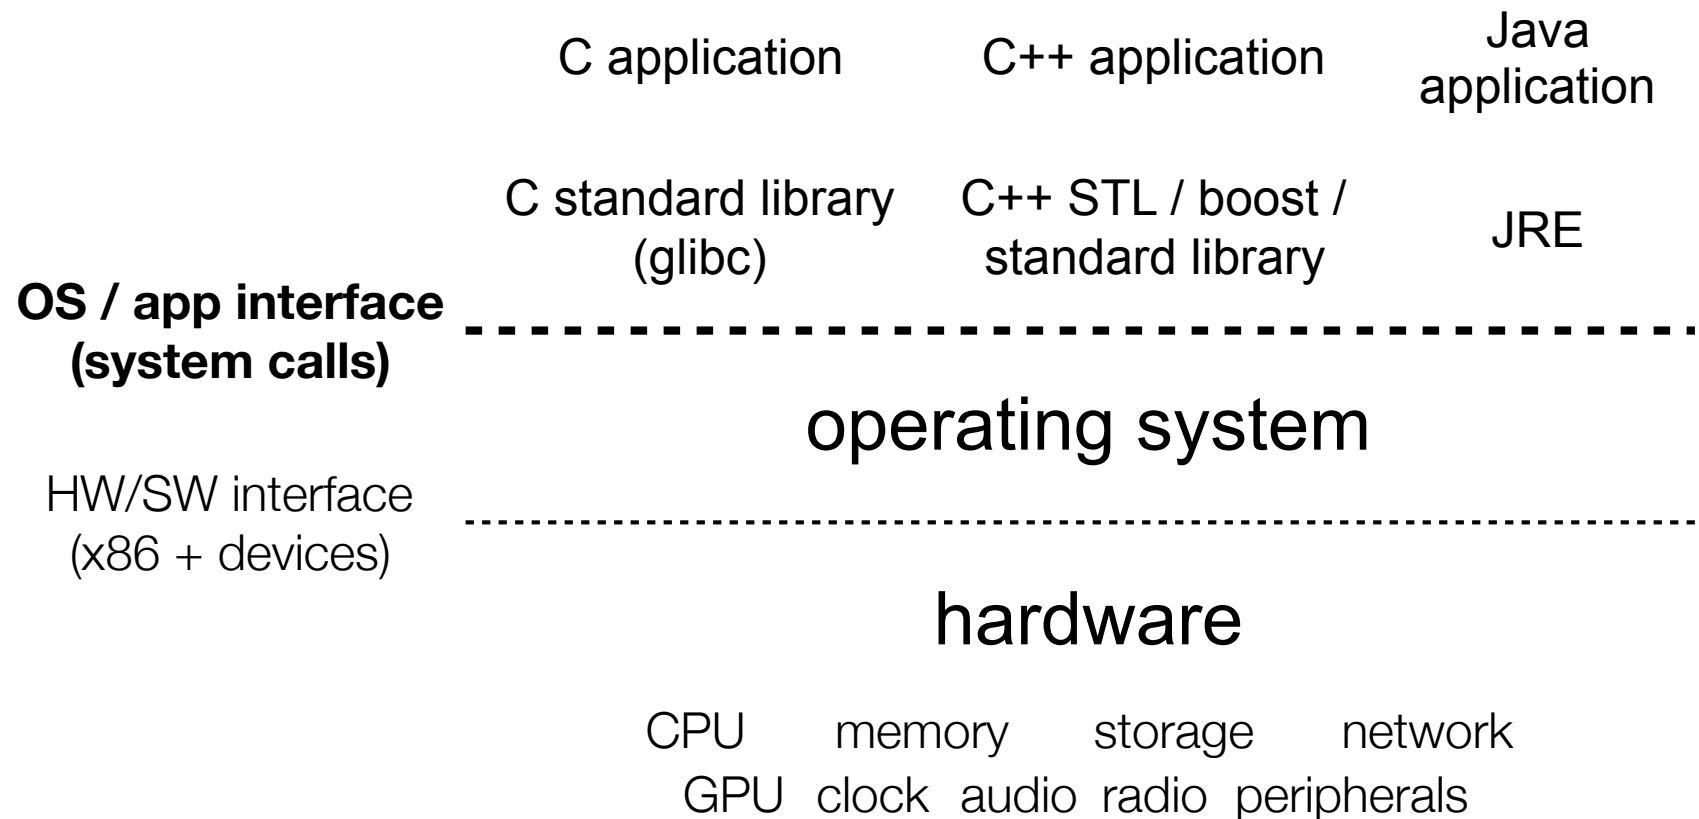

# Systems programming

The programming skills, engineering discipline, and knowledge you need to build a system

***programming***: C / C++

***discipline***: testing, debugging, performance analysis

***knowledge***: long list of interesting topics

concurrency, OS interfaces and semantics, techniques for consistent data management, distributed systems algorithms, ...

most important: a deep understanding of the “layer below”

*quiz: is data safely on disk after a “write( )” system call returns?*

# Discipline?!?

Cultivate good habits, encourage clean code

coding style conventions

unit testing, code coverage testing, regression testing

documentation (code comments, design docs)

code reviews

Will take you a lifetime to learn

but oh-so-important, especially for systems code

avoid write-once, read-never code

# What you will be doing

## Attending lectures and sections

lecture: ~25 of them, MWF here

sections: ~9 of them, Thur. here

Take notes!!!! Don't expect everything to be on the web

## Doing programming projects

4 of them, successively building on each other, plus a warmup

includes C, C++, file system, network

## Doing programming exercises

one per lecture, due in the morning before the next lecture

coarse-grained grading (0,1,2,3)

## Midterm and a final exam (1 hour each, weighted equally)

No separate final exam period during summer quarter; 2nd exam last day of class



# Lecture laptop policy

Just say no!!

No open laptops during class (no kidding!)

(unless we're doing something where everyone should participate)

Why? You will learn better if you are mentally present during the class (not just physically)

Got the urge to search? Ask a question!

Exception: if you *actually*, really, **really**, use a laptop or tablet to take notes, ok, but sit in the back row so you don't distract others

But you'll learn more if you use paper instead! (really!!)

And no phone texting, web surfing, etc., either...

You may close your electronic devices now.

# Deadlines & Conduct

Need to get things done on time (very hard to catch up)

Programming assignments: 4 late days, **2 max per project**

Intended for unusual circumstances, not routine procrastination

Exercises: **no late days** (max benefit that way)

Academic Integrity (details on the web; [read them](#))

I trust you implicitly; I will follow up if that trust is violated

The rules boil down to: don't attempt to gain credit for something you didn't do; don't help others to do so

That does **not** mean suffer in silence - you have colleagues, instructor, TAs - work with them; learn from each other!

# Course web/calendar

Linked off of the course web page

master schedule for the class (might change slightly)

links to:

- lecture slides

- code discussed in lectures

- assignments, exercises (including due dates)

- optional “self-exercise” solutions

- various C/C++/Linux/git/CSE resources

Explore!!!

# Labs, office hours, &c

Office hours: plan is to have something Mon.-Fri.

Past summers right after class or an hour later has worked pretty well — what should we do this year?

Discussion board: stay in touch outside of class

See main web page for link, post followup to welcome msg

Mailing list for announcements

You are automatically subscribed when you are registered

# Welcome!

Today's goals:

*introductions*

*course syllabus*

**quick C refresher**

# C

Created in 1972 by Dennis Ritchie

designed for creating system software

portable across machine architectures


most recently updated in 1999 (C99) and 2011 (C11)

## Characteristics


low-level, smaller standard library than Java

procedural (not object-oriented)

typed but unsafe; incorrect programs can fail spectacularly

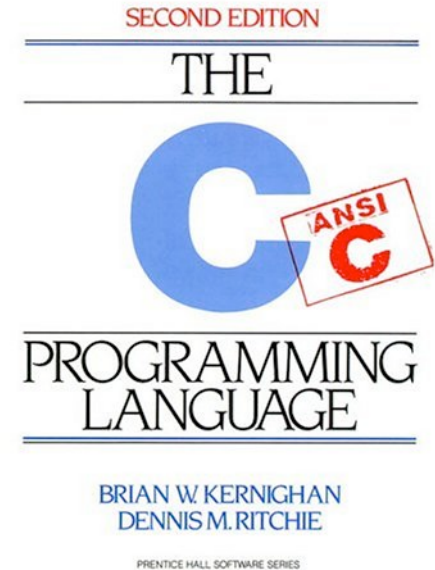

# C workflow

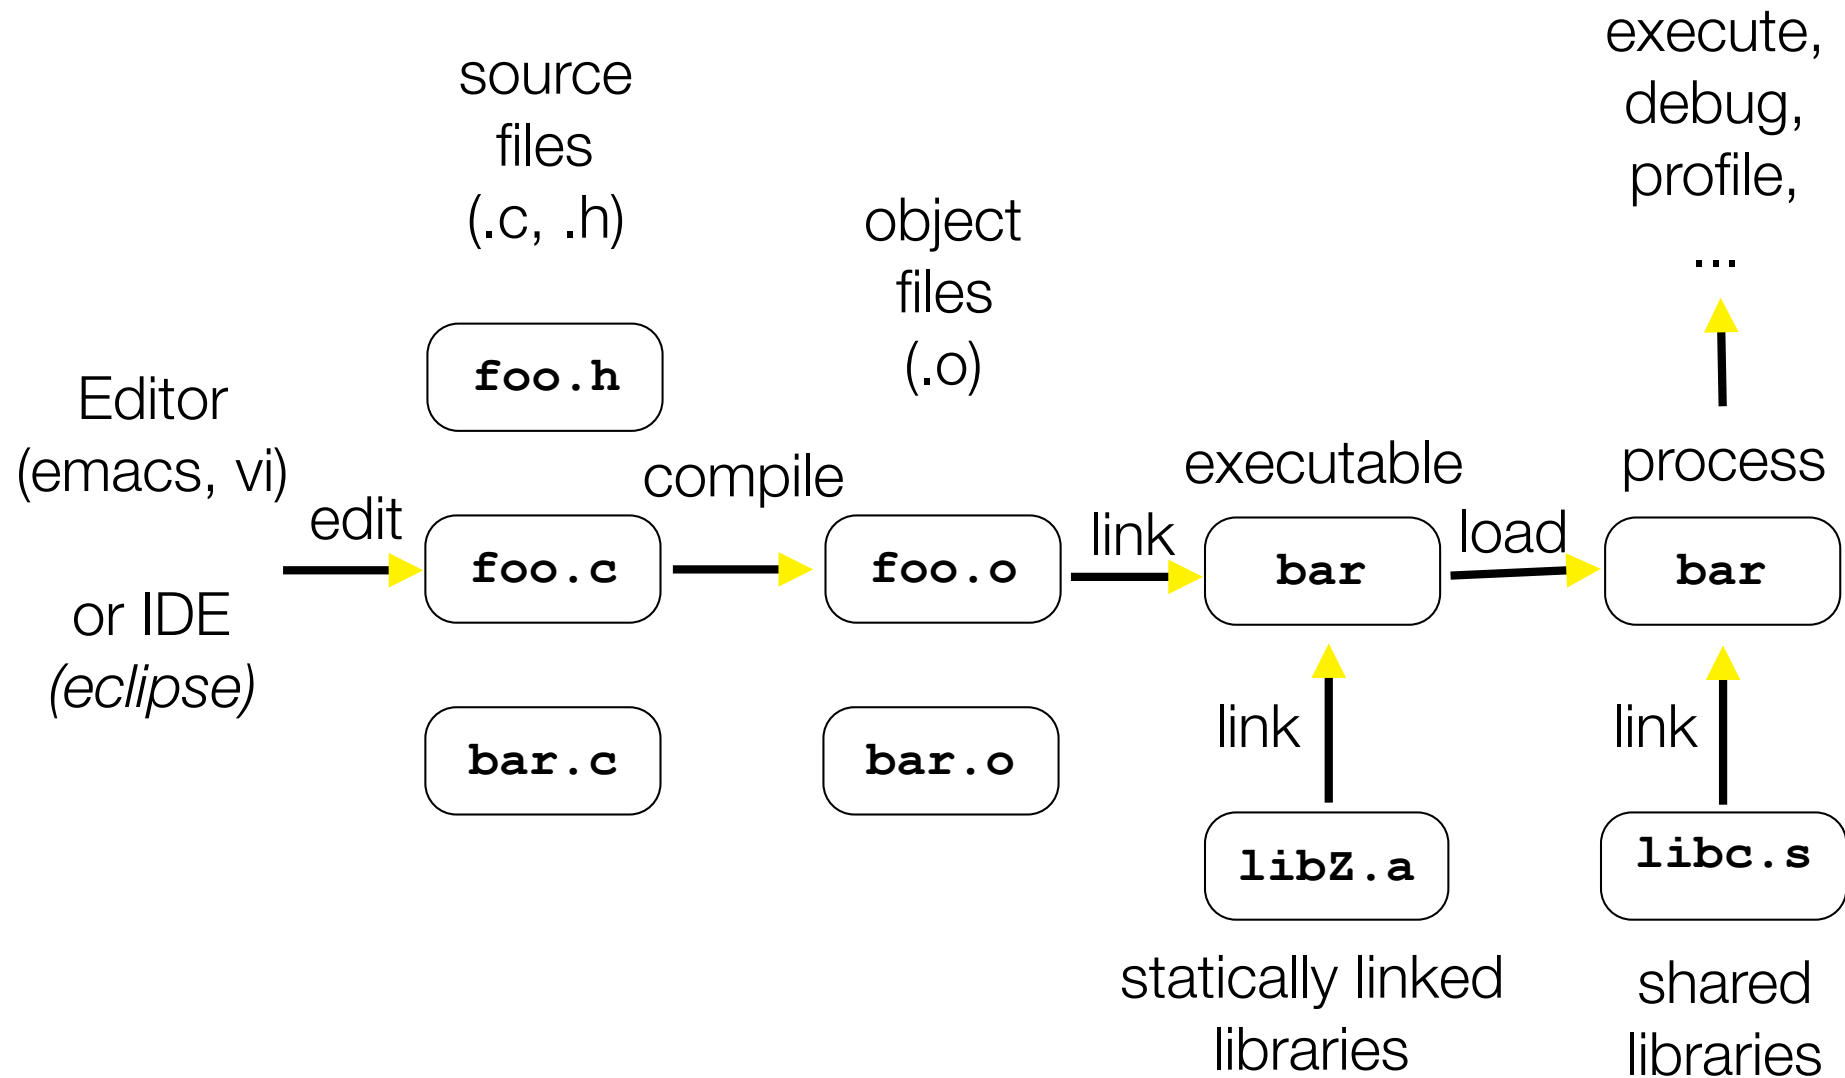

# From C to machine code

C source file  
(dosum.c)

```
int dosum(int i, int j) {  
    return i+j;  
}
```

C compiler (gcc -S)

assembly source file  
(dosum.s)

```
dosum:  
    pushl    %ebp  
    movl     %esp, %ebp  
    movl     12(%ebp), %eax  
    addl     8(%ebp), %eax  
    popl     %ebp  
    ret
```

machine code  
(dosum.o)

```
80483b0: 55  
89 e5 8b 45  
0c 03 45 08  
5d c3
```


assembler (as)



# Skipping assembly language

Most C compilers generate .o files (machine code) directly

- i.e., without actually saving the readable .s assembly file

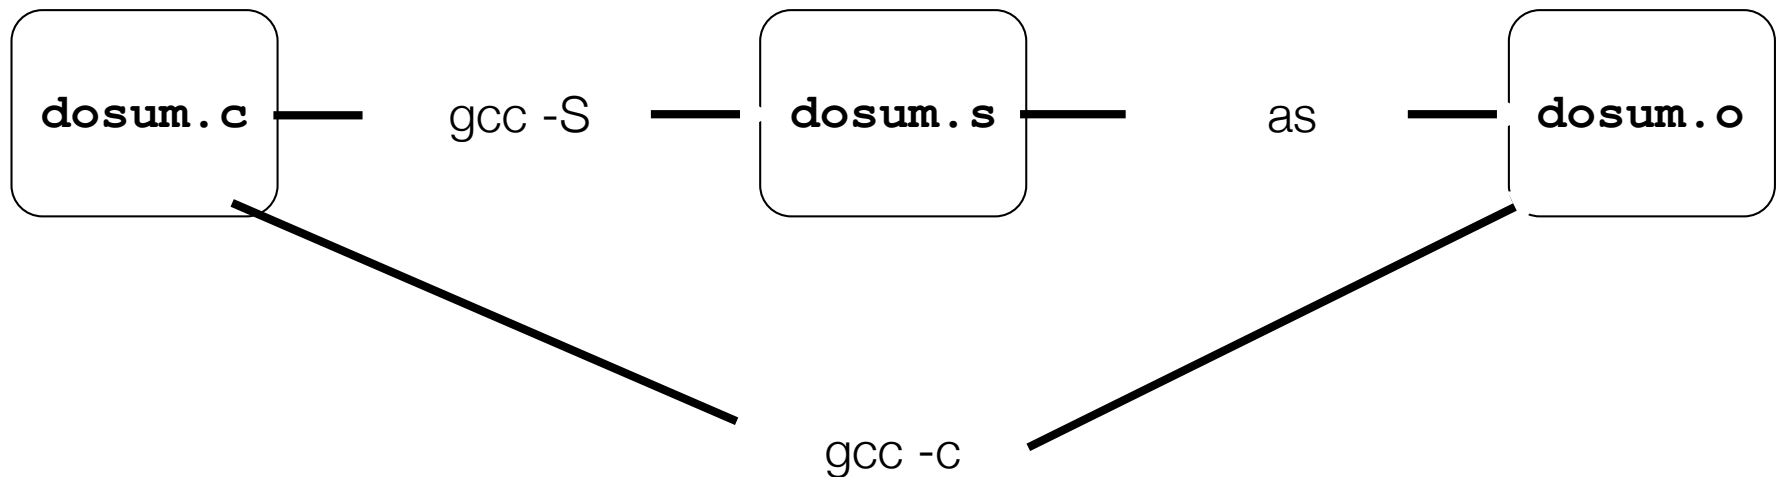

# Multi-file C programs

C source file  
(dosum.c)

```
int dosum(int i, int j) {  
    return i+j;  
}
```

this “prototype” of  
dosum() tells gcc  
about the types of  
dosum’s arguments  
and its return value

C source file  
(sumnum.c)

```
#include <stdio.h>  
  
int dosum(int i, int j);  
  
int main(int argc, char **argv) {  
    printf("%d\n", dosum(1, 2));  
    return 0;  
}
```

dosum() is  
implemented  
in dosum.c

# Multi-file C programs

C source file  
(dosum.c)

```
int dosum(int i, int j) {  
    return i+j;  
}
```

C source file  
(sumnum.c)

```
#include <stdio.h>
```

```
int dosum(int i, int j);
```

```
int main(int argc, char **argv) {  
    printf("%d\n", dosum(1,2));  
    return 0;  
}
```


why do we need  
this #include?

where is the  
implementation  
of printf?

# Compiling multi-file programs

Multiple object files are ***linked*** to produce an executable

- standard libraries (libc, crt1, ...) are usually also linked in
- a library is just a pre-assembled collection of .o files

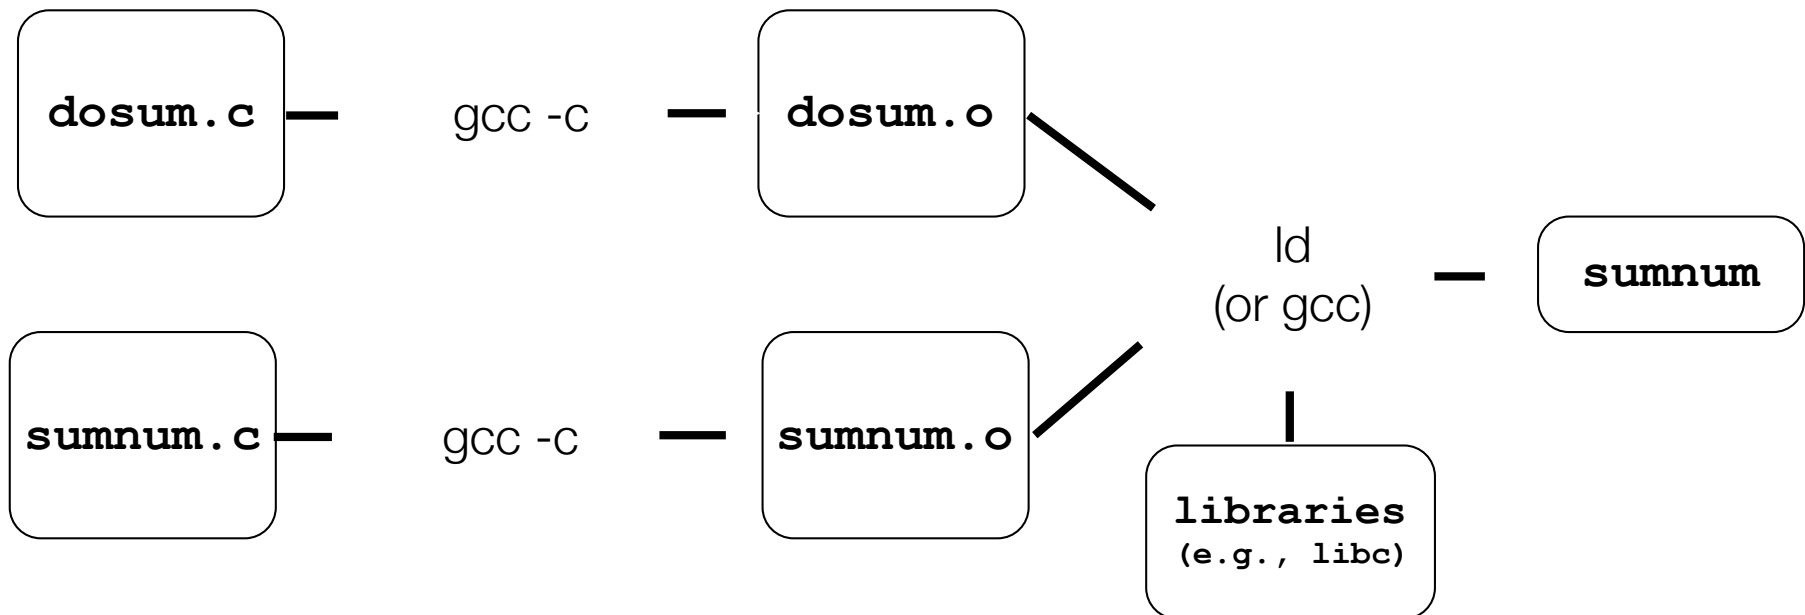

# Object files

sumnum.o, dosum.o are **object files**

- each contains machine code produced by the compiler
- each might contain references to external symbols
  - ▶ variables and functions not defined in the associated .c file
  - ▶ e.g., sumnum.o contains code that relies on printf( ) and dosum( ), but these are defined in libc.a and dosum.o, respectively
- linking resolves these external symbols while smooshing together object files and libraries

# Let's dive into C itself

Things that are the same as Java

syntax for statements, control structures, function calls

types: `int, double, char, long, float`

type-casting syntax: `float x = (float) 5 / 3;`

expressions, operators, precedence

`+ - * / % ++ -- = += -= *= /= %= < <= == != > >= && || !`

scope (local scope is within a set of `{ }` braces)

comments: `/* comment */` `// comment`

# Primitive types in C

*typical sizes – see `sizeofs.c`*

integer types

char, int

floating point

float, double

modifiers

short [int]

long [int, double]

signed [char, int]

unsigned [char, int]

type	bytes (32 bit)	bytes (64 bit)	32 bit range	printf
<b>char</b>	1	1	[0, 255]	%c
short int	2	2	[-32768, 32767]	%hd
unsigned short int	2	2	[0, 65535]	%hu
<b>int</b>	4	4	[-214748648, 2147483647]	%d
unsigned int	4	4	[0, 4294967295]	%u
long int	4	8	[-2147483648, 2147483647]	%ld
long long int	8	8	[-9223372036854775808, 9223372036854775807]	%lld
float	4	4	approx $[10^{-38}, 10^{38}]$	%f
<b>double</b>	8	8	approx $[10^{-308}, 10^{308}]$	%lf
long double	12	16	approx $[10^{-4932}, 10^{4932}]$	%Lf
pointer	4	8	[0, 4294967295]	%p

# C99 extended integer types

Solves the conundrum of “how big is a long int?”

```
#include <stdint.h>
```

```
void foo(void) {
```

```
    int8_t  w;      // exactly 8 bits, signed
```

```
    int16_t x;      // exactly 16 bits, signed
```

```
    int32_t y;      // exactly 32 bits, signed
```

```
    int64_t z;      // exactly 64 bits, signed
```

```
    uint8_t a;      // exactly 8 bits, unsigned
```

```
    ...etc.
```

```
}
```



# Similar to Java...

- variables
  - ▶ C99/C11: don't have to declare at start of a function or block
  - ▶ need not be initialized before use (*gcc -Wall will warn*)

varscope.c

```
#include <stdio.h>

int main(int argc, char **argv) {
    int x, y = 5;    // note x is uninitialized!
    long z = x+y;

    printf("z is '%ld'\n", z); // what's printed?
    {
        int y = 10;
        printf("y is '%d'\n", y);
    }
    int w = 20;    // ok in c99
    printf("y is '%d', w is '%d'\n", y, w);
    return 0;
}
```

# Similar to Java...

## **const**

- a qualifier that indicates the variable's value cannot change
- compiler will issue an **error** if you try to violate this
- why is this qualifier useful?

consty.c

```
#include <stdio.h>

int main(int argc, char **argv) {
    const double MAX_GPA = 4.0;

    printf("MAX_GPA: %g\n", MAX_GPA);
    MAX_GPA = 5.0;    // illegal!
    return 0;
}
```

# Similar to Java...

for loops

- C99/C11: can declare variables in the loop header

if/else, while, and do/while loops

- C99/C11: **bool** type supported, with #include <stdbool.h>
- any type can be used; 0 means **false**, everything else **true**

loopy.c

```
int i;

for (i = 0; i < 100; i++) {
    if (i % 10 == 0) {
        printf("i: %d\n", i);
    }
}
```

# Similar to Java...

pointy.c

parameters / return value

- C always passes arguments by value
- “pointers”
  - ▶ lets you pass by reference
  - ▶ more on these soon
  - ▶ least intuitive part of C
  - ▶ very dangerous part of C

```
void add_pbv(int c) {
    c += 10;
    printf("pbv c: %d\n", c);
}

void add_pbr(int *c) {
    *c += 10;
    printf("pbr *c: %d\n", *c);
}

int main(int argc, char **argv) {
    int x = 1;

    printf("x: %d\n", x);

    add_pbv(x);
    printf("x: %d\n", x);

    add_pbr(&x);
    printf("x: %d\n", x);

    return 0;
}
```

# Very different than Java

## arrays

- just a bare, contiguous block of memory of the correct size
- an array of 10 ints requires  $10 \times 4 \text{ bytes} = 40 \text{ bytes}$  of memory


arrays have no methods, do not know their own length

- C doesn't stop you from overstepping the end of an array!!
- many, many security bugs come from this

# Very different than Java

## strings

- array of char
- terminated by the NULL character '\0'
- are not objects, have no methods; string.h has helpful utilities

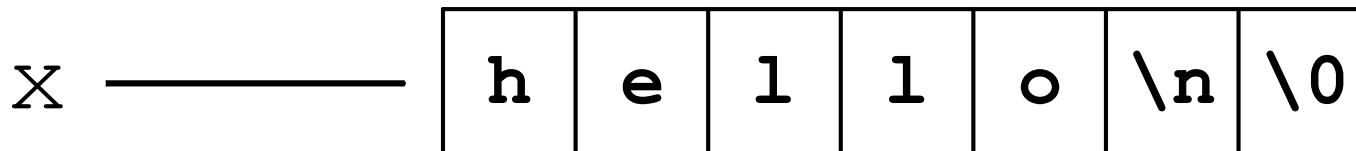

```
char *x = "hello\n";
```

# Very different than Java

## errors and exceptions

- C has no exceptions (no try / catch)
- errors are returned as integer error codes from functions
- makes error handling ugly and inelegant

## crashes

- if you do something bad, you'll end up spraying bytes around memory, hopefully causing a "segmentation fault" and crash

## objects

- there aren't any; struct is closest feature (set of fields)

# Very different than Java

## memory management

- **you** must worry about this; there is no garbage collector
- local variables are allocated off of the stack
  - ▶ freed when you return from the function
- global and static variables are allocated in a data segment
  - ▶ are freed when your program exits
- you can allocate memory in the heap segment using `malloc( )`
  - ▶ you must free malloc'ed memory with `free( )`
  - ▶ failing to free is a leak, double-freeing is an error (hopefully crash)



# Very different than Java

Libraries you can count on

- C has very few compared to most other languages
- no built-in trees, hash tables, linked lists, sort , etc.
- you have to write many things on your own
  - ▶ particularly data structures
  - ▶ error prone, tedious, hard to build efficiently and portably
- this is one of the main reasons C is a much less productive language than Java, C++, python, or others

# For Wednesday

Exercise 0 is due in the morning, 10am, *before* class:

<http://courses.cs.washington.edu/courses/cse333/17su/exercises/ex00.html>

(Easier: look on the calendar or homework page for the link)

Not registered yet? Do the exercise and submit it anyway!

Post a message on the discussion board

Get it to keep track of new messages for you!

HW0 out soon - will announce when ready

Mostly logistics (get files via git, change files, turn in files via git);  
demos/details during sections this week

See you on Wednesday!