



v. The purpose of a header guard is to:

- a) prevent more than one .c file from including a particular .h file
- b) prevent the header file from being included indirectly, as a side-effect of including some other .h file that includes it
- c) document the contents and purpose of the header file
- d) prevent the header file from being included twice, directly or indirectly

vi. A C++ reference:

- a) serves as an alternative name for an object or variable (i.e., is an alias)
- b) serves as a pointer to an object or variable
- c) cannot be used as a parameter of a function
- d) cannot be passed as an argument to a function

vii. What does “const” in the following code imply?

```
void foo (const int *x) { ... }
```

- a) the value of the pointer “x” cannot be changed inside the function foo
- b) the function foo cannot have any side-effects
- c) nothing; const in this case has no effect
- d) the value that the pointer “x” points to cannot be changed inside the function foo





viii. What does “const” in the following code imply?

```
void Foo::bar (int *x) const { ... }
```

- a) the method bar() cannot mutate any of its parameters
- b) the method bar() cannot have any side-effects at all
- c) the method bar() cannot mutate any of Foo’s state
- d) the method bar() can only invoke const-y functions and methods

ix. Which of the following box and arrow diagrams correctly represents the following code?

```
int x = 5;  
int *y = &x;  
int &z = x;  
int *w = &z;
```

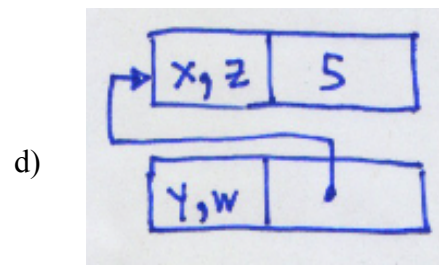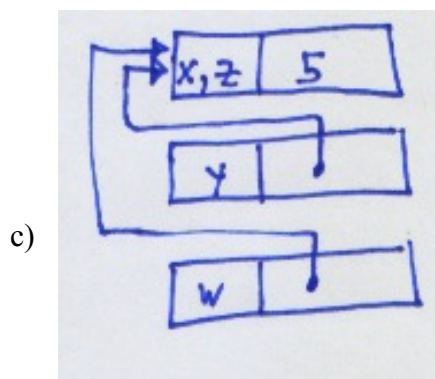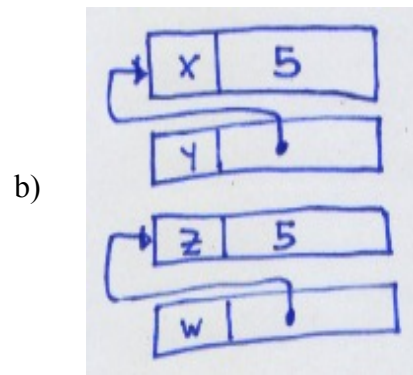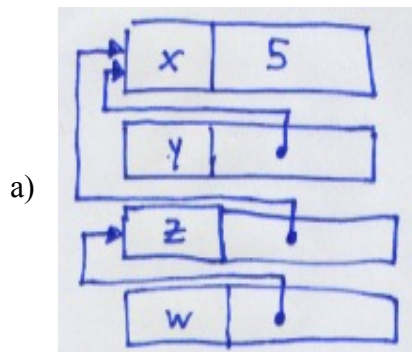

x. The destructor of an object that is heap-allocated:

- a) is invoked when the function in which it is allocated returns
- b) is never invoked
- c) must be invoked manually
- d) is invoked when somebody uses “delete” to deallocate the object

**xi.** A vtable:

- a) exists for each class, and contains a function pointer for each method in the class
- b) exists for each class, and contains a function pointer for each virtual method in the class
- c) exists for each object instance, and contains a function pointer for each method in the object's class
- d) exists for each object instance, and contains a function pointer for each virtual method in the object's class

**xii.** Slicing occurs when:

- a) the value of a derived class is assigned to an instance of a base class
- b) a pointer to a derived class is cast to, and assigned to, a pointer to a base class
- c) an N-element array is assigned to an M-element array, where  $M < N$
- d) an element is deleted from a `std::vector`

## CSE 333 Final Exam August 19, 2016

**Question 2.** (22 points) Templates, STL, function pointers, and smart pointers all at once! – oh my!!! Don't panic – the answers to this question are actually quite short.

Sometimes a function is called many times to recomputed values. If that turns out to be expensive we may be able to save time by storing previously computed values in a cache and reuse them instead of computing them from scratch each time.

For this problem we want to implement parts of a class named `FunctionCache`. The idea is that an instance of `FunctionCache` stores a pointer to a function  $f$  and a map of `<argument, result>` pairs, where the result in each pair is computed by applying function  $f$  to the corresponding argument. The class also includes a function `apply` that is used by clients to compute values instead of calling  $f$  directly. When `apply(x)` is called, it looks in the map to see if  $x$  is stored there as a key. If so, it returns the result found in the map without calling function  $f$ . If  $x$  does not appear as a key in the map, then `apply` calls  $f$  to compute  $f(x)$ , then stores `<x, f(x)>` in the map for future use, and finally returns the result to the caller.

Because we want this to work for all single-argument functions, the class is a template whose parameters are the argument and result types of the function. Here is the main part of this template, except for the `apply` function code:

```
#include <map>
using namespace std;

// Wrapper class for a function with argument type T and
// result type U.
template <typename T, typename U>
class FunctionCache {

public:
    // construct a new FunctionCache. Argument f is a pointer
    // to the function to be used to compute results.
    FunctionCache(U (*f)(T)): cache_(new map<T, U>()), func_(f) { }

    // destructor
    ~FunctionCache() {
        delete cache_;
    }

    // return func_(val), but use cache_ to store and retrieve
    // previously computed values instead of always calling func_
    U apply(T val) { ... }

private:
    map<T, U> *cache_; // cache of <argument, result> pairs
    U (*func_)(T); // the function
};
```

(Continued on the next page. You may remove this page for reference.)

## CSE 333 Final Exam August 19, 2016

**Question 2.** (cont.) Here is an example of how a client program might use the FunctionCache template:

```
// sample function - return x/2.0
double half(int i) { return i/2.0; }

int main(int argc, char **argv) {
    FunctionCache<int, double> hcache(half);
    double x = hcache.apply(3); // computes and saves <3,1.5>
    double y = hcache.apply(4); // computes and saves <4,2.0>
    double z = hcache.apply(3); // returns 1.5 from the cache
    ...                          // without recomputing
    return 0;
}
```

(a) (16 points) Provide the full definition of function `apply` for the `FunctionCache` template. Write your solution below. Hint: the solution may be quite short – do not be alarmed.

```
// return func_(val), but use cache_ to retrieve previously
// computed values, and store new values there
```

```
U apply(T val) {
```

```
}
```

(continued on next page)

## CSE 333 Final Exam August 19, 2016

**Question 2. (cont.)** (b) (6 points) The original version of the `FunctionCache` template uses explicit memory management (`delete`) in the destructor to deallocate the `cache_map` data when an instance of `FunctionCache` is destroyed.

Another way to handle the heap data would be to use smart pointers instead of an explicit `delete` to ensure that the `cache_data` is deallocated when a `FunctionCache` object is destroyed.

Below, give a precise description of the changes that need to be made to the original template to make this change. If any code needs to be added or altered, write the new code here and be sure it is clear where the changes should be made and what, if anything, in the original code should be deleted or replaced. If any changes are needed in your implementation of `apply` in part (a), also describe them here.

## CSE 333 Final Exam March 16, 2016

**Question 3.** (16 points) C++ classes. Consider the following program, which compiles and links successfully. (What happens after that is something we'll get to later. ☺)

```
#include <iostream>
using namespace std;

class Base {
public:
    Base() {
        cout << "Base constructor" << endl;
        ia_ = new int[5];
    }
    virtual ~Base() {
        cout << "Base destructor" << endl;
        delete[] ia_;
    }
    Base& operator=(const Base& rhs) {
        if (this != &rhs) {
            delete[] ia_;
            ia_ = rhs.ia_;
            cout << "Base assignment" << endl;
        }
        return *this;
    }
private:
    int *ia_;
};

class Derive : public Base {
public:
    Derive() {
        ja_ = new int[5];
        cout << "Derive constructor" << endl;
    }
    virtual ~Derive() {
        cout << "Derive destructor" << endl;
        delete[] ja_;
    }
private:
    int *ja_;
};

int main() {
    Base b1;
    Derive d1;
    b1 = d1;
    return 0;
}
```

(Question continued on next page – you may remove this page if you wish.)



## CSE 333 Final Exam March 16, 2016

**Question 3. (cont.)** (a) (8 points) What does this program print when it is executed?

(Reminder/hint: when an object of a derived class is constructed, the base class constructor for that object executes before the derived class constructor. When the object is deleted, the destructors run in the reverse order – derived class destructor first.)

(b) (8 points) Unfortunately, after the program finishes printing the output you described in your answer to part (a), it crashes and does not exit normally. The memory management software detects some sort of problem. What's wrong and what is the error in the code? (Be specific and concise. You do not need to fix the problem – just explain it precisely.)

## CSE 333 Final Exam March 16, 2016

**Question 4.** (20 points) The always entertaining virtual function question. The following program compiles, runs, and produces output with no error messages or other problems. Answer questions about it on the next page.

```
#include <iostream>
using namespace std;

class SuperThing {
public:
    virtual void m1() { m2(); cout << "super::m1" << endl; }
        void m2() { cout << "super::m2" << endl; }
        void m3() { cout << "super::m3" << endl; }
};

class Thing: public SuperThing {
public:
    virtual void m2() { m1(); cout << "thing::m2" << endl; }
};

class SubThing: public Thing {
public:
    virtual void m1() { cout << "sub::m1" << endl; }
        void m3() { m2(); cout << "sub::m3" << endl; }
};

int main() {
    SuperThing *super = new Thing();
    Thing *th = (Thing*)super;
    SubThing *sub = new SubThing();
    Thing *thsub = sub;

    ///// HERE /////


    cout << "---" << endl;
    th->m1();
    th->m3();
    cout << "---" << endl;
    sub->m1();
    sub->m3();
    cout << "---" << endl;
    thsub->m1();
    thsub->m3();

    return 0;
}
```

(Question continued on next page – you may remove this page if you wish.)

**CSE 333 Final Exam March 16, 2016**

**Question 4. (cont.)** (a) (8 points) Complete the following diagram to show the runtime state of the program when execution reaches the comment `///// HERE /////` in function `main`. The diagram should include the variables in `main` (already supplied), the objects they point to, pointers from objects to their vtables, and pointers from vtables to the correct functions. To save time, boxes for the variables in `main`, the vtables, the functions, and the first object created by the program, have been provided for you. A couple of the arrows representing some of the pointers are also included to get you started. You need to supply all additional objects and pointers needed (if any). Be sure that the order of pointers in the various vtables is clear.

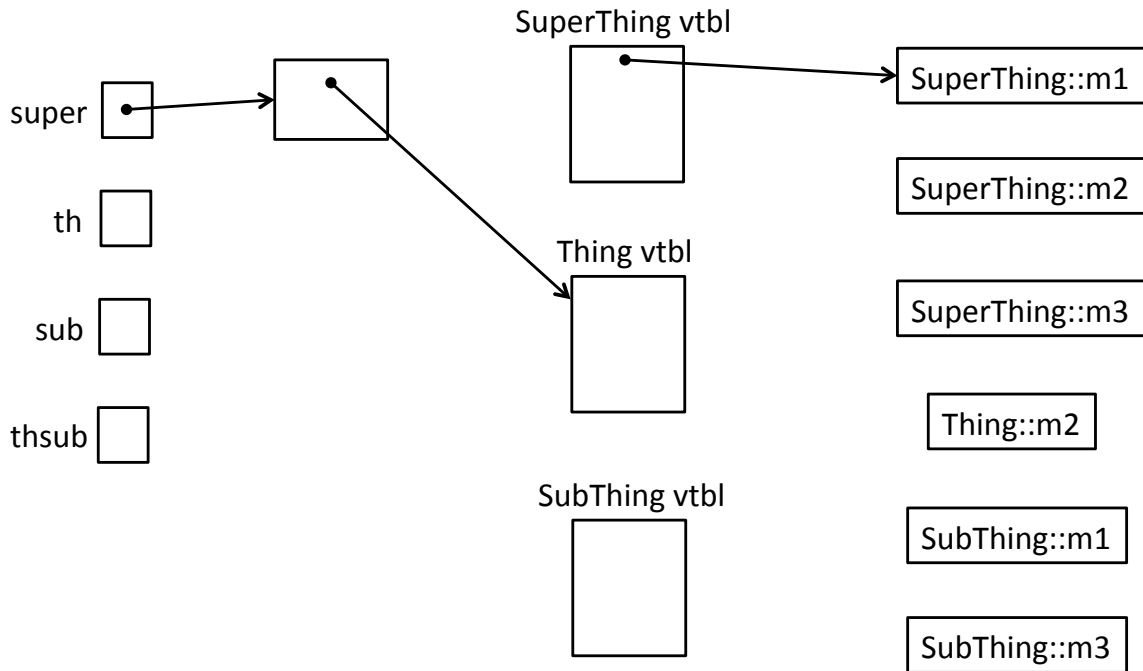

(b) (12 points) What does this program print when it is executed?

## CSE 333 Final Exam June 6, 2017

**Question 6.** (12 points) A bit of networking. When we were describing how a network server works, we listed 7 steps that need to be done to establish communication with a client, exchange data, and shut down. In the list below, fill in the name of the function that is used at each step (the reference information at the beginning of the exam may be useful for this), then give a 1-sentence description of the purpose of that step. Step 6 (read/write) is done for you as an example, and the function name for step 2 is also provided. You should fill in the rest of the table.

- |                                |   |
|--------------------------------|---|
| 1. Function:                   | Purpose:  |
| 2. Function: <b>socket</b>     | Purpose:  |
| 3. Function:                   | Purpose:  |
| 4. Function:                   | Purpose:  |
| 5. Function:                   | Purpose:  |
| 6. Function: <b>read/write</b> | Purpose: exchange data with the client using the socket |
| 7. Function:                   | Purpose:  |

## CSE 333 18au Final Exam December 12, 2018

**Question 7.** (20 points) Threads. Consider the following simple C++ program, which prints a sequence of even numbers followed by a sequence of squares. It also contains an extra `#include` and a lock variable that might (☺) be useful later.

```
#include <pthread.h>
#include <iostream>

using namespace std;

static pthread_mutex_t lock;

void print(string what, int num) {
    cout << what << " " << num << endl;
}

// print first n even numbers: 2, 4, 6, ..., 2*n
// you may not modify this function
void print_evens(int n) {
    for (int i = 1; i <= n; i++) {
        print("evens", 2*i);
    }
}

// print first n squares: 1, 4, 9, 16, ... n*n
// you may not modify this function
void print_squares(int n) {
    for (int i = 1; i <= n; i++) {
        print("squares", i*i);
    }
}

int main(int argc, char** argv) {
    int nsquares = 4;
    int nevens = 5;

    print_evens(nevens);
    print_squares(nsquares);
    return 0;
}
```

**Remove this page from the exam**, then continue with the question on the next page. **Do not write anything on this page.** It will not be scanned for grading.

## CSE 333 18au Final Exam December 12, 2018

**Question 7. (cont.)** For this question we would like to modify this program so it executes the two functions `print_evens` and `print_squares` concurrently in separate threads. You may not modify the existing `print_evens` and `print_squares` code. You will need to add appropriate thread starter functions that accept parameters from `main` and call the existing functions with the appropriate arguments. You will also need to make whatever modifications are needed in function `print` so that each output line appears on a separate line by itself without output from the other thread interfering. The existing `print` and `main` functions are copied below and on the next page for you to modify (don't modify the code on the previous page). Make whatever changes and additions are needed to implement correct, concurrent C++ threaded code using `pthread`s.

```
// modify this function so it is thread safe
void print(string what, int num) {

    cout << what << " " << num << endl;

}

// add additional thread starter function definitions here
```

(continue with `main` function on the next page)

## CSE 333 18au Final Exam December 12, 2018

**Question 7. (cont.)** Modify the main function below to replace the sequential calls to `print_evens` and `print_squares` with code that executes these two functions concurrently in independent threads and performs whatever other initialization, synchronization, and termination is needed for the concurrent program to work correctly.

```
int main(int argc, char** argv) {
    int nsquares = 4;
    int nevens = 5;

    // print_evens(nevens);
    // print_squares(nsquares);

    return 0;
}
```

## CSE 333 19wi Final Exam March 20, 2019

**Question 4.** (20 points, 4 each) Smart pointers. Below we have several small programs, each of which calls a function `foo`, and each of which uses smart pointers. Some of them are buggy, and some of them work correctly. Your job is to determine, for each program, the following:

- (1) Does it compile?
- (2) Is its behavior correct (i.e. no memory leaks, run-time errors, or undefined behavior)? Choose n/a if it did not compile.
- (3) If you answered "no" to either of the above, explain concisely what the problem is and how to fix it.

You should assume that none of the `foo` functions will attempt to free, delete, or otherwise modify their argument. You can assume that the actual value returned by `main` is not relevant.

```
(a) int foo(int *n); // defined elsewhere

int main() {
    std::unique_ptr<int> best_course(new int(333));
    int ans = foo(best_course);
    return ans;
}
```

Does it compile? (circle)                      yes                      no                      not sure  
Does it execute correctly (circle)        yes                      no                      n/a (didn't compile)  
What is the problem (if any) and how do we fix it? (leave blank if not applicable)

```
(b) int foo(std::shared_ptr<int> p);

int main() {
    std::unique_ptr<int> best_course(new int(333));
    int ans = foo(std::shared_ptr<int>(best_course.release()));
    return ans;
}
```

Does it compile? (circle)                      yes                      no                      not sure  
Does it execute correctly (circle)        yes                      no                      n/a (didn't compile)  
What is the problem (if any) and how do we fix it? (leave blank if not applicable)

(continued next page)



**CSE 333 19wi Final Exam March 20, 2019**

**Question 4. (cont.)**

(c) `int foo(int, std::shared_ptr<int> p);`

```
int main() {
    std::shared_ptr<int> best_course(new int[10]);
    int ans = foo(10, best_course);
    return ans;
}
```

Does it compile? (circle)                      yes                      no                      not sure

Does it execute correctly (circle)            yes                      no                      n/a (didn't compile)

What is the problem (if any) and how do we fix it? (leave blank if not applicable)

(d) `int foo(std::unique_ptr<int> n);`

```
int main() {
    std::unique_ptr<int> best_course(new int(333));
    int ans = foo(best_course);
    return ans;
}
```

Does it compile? (circle)                      yes                      no                      not sure

Does it execute correctly (circle)            yes                      no                      n/a (didn't compile)

What is the problem (if any) and how do we fix it? (leave blank if not applicable)

(e) `int foo(const int *p);`

```
int main() {
    std::unique_ptr<int> best_course(new int(333));
    int ans = foo(best_course.release());
    return ans;
}
```

Does it compile? (circle)                      yes                      no                      not sure

Does it execute correctly (circle)            yes                      no                      n/a (didn't compile)

What is the problem (if any) and how do we fix it? (leave blank if not applicable)