

IP Addresses, DNS

CSE 333 Winter 2020

Instructor: Justin Hsia

Teaching Assistants:

Andrew Hu

Austin Chan

Brennan Stein

Cheng Ni

Cosmo Wang

Diya Joy

Guramrit Singh

Mengqi Chen

Pat Kosakanchit

Rehaan Bhimani

Renshu Gu

Travis McGaha

Zachary Keyes

Administrivia

- ❖ hw3 is due Thursday (2/27)
 - Usual reminders: don't forget to tag, clone elsewhere, and recompile
- ❖ hw4 out on Friday (2/28)
- ❖ Exercise 15 will be released on Thursday
 - Related to section this week
 - Can start looking at it early; we'll finish covering material on Friday

Lecture Outline

- ❖ **Network Programming**
 - Sockets API
 - Network Addresses
 - DNS Lookup


Files and File Descriptors

- ❖ Remember `open()`, `read()`, `write()`, and `close()` ?
 - POSIX system calls for interacting with files
 - `open()` returns a `file descriptor`
 - An integer that represents an open file
 - This file descriptor is then passed to `read()`, `write()`, and `close()`
 - Inside the OS, the file descriptor is used to index into a table that keeps track of any OS-level state associated with the file, such as the file position

Networks and Sockets

- ❖ UNIX likes to make *all* I/O look like file I/O
 - You use `read()` and `write()` to communicate with remote computers over the network!
 - A file descriptor use for network communications is called a `socket`
 - Just like with files:
 - Your program can have multiple network channels open at once
 - You need to pass a file descriptor to `read()` and `write()` to let the OS know which network channel to use

File Descriptor Table

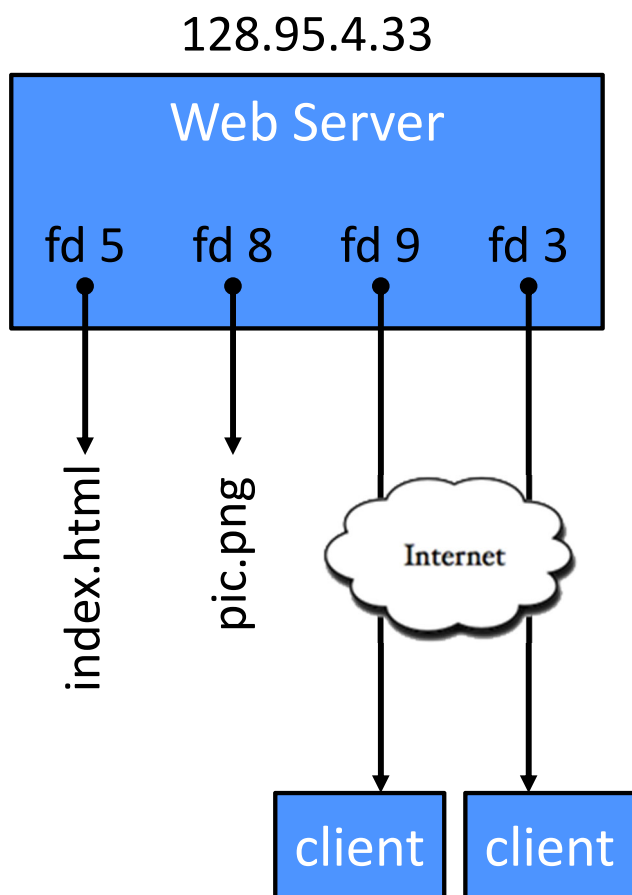

OS's File Descriptor Table for the Process

File Descriptor	Type	Connection
0	pipe	stdin (console)
1	pipe	stdout (console)
2	pipe	stderr (console)
3	TCP socket	local: 128.95.4.33:80 remote: 44.1.19.32:7113
5	file	index.html
8	file	pic.png
9	TCP socket	local: 128.95.4.33:80 remote: 102.12.3.4:5544

Types of Sockets

❖ Stream sockets – we will focus here in 333

- For connection-oriented, point-to-point, reliable byte streams
 - Using TCP, SCTP, or other stream transports

❖ Datagram sockets

- For connection-less, one-to-many, unreliable packets
 - Using UDP or other packet transports

❖ Raw sockets

- For layer-3 communication (raw IP packet manipulation)


Stream Sockets

- ❖ Typically used for client-server communications
 - **Client**: An application that establishes a connection to a server
 - **Server**: An application that receives connections from clients
 - Can also be used for other forms of communication like peer-to-peer

1) Establish connection:



2) Communicate:




3) Close connection:




Datagram Sockets

- ❖ Often used as a building block
 - No flow control, ordering, or reliability, so used less frequently
 - *e.g.* streaming media applications or DNS lookups

1) Create sockets:

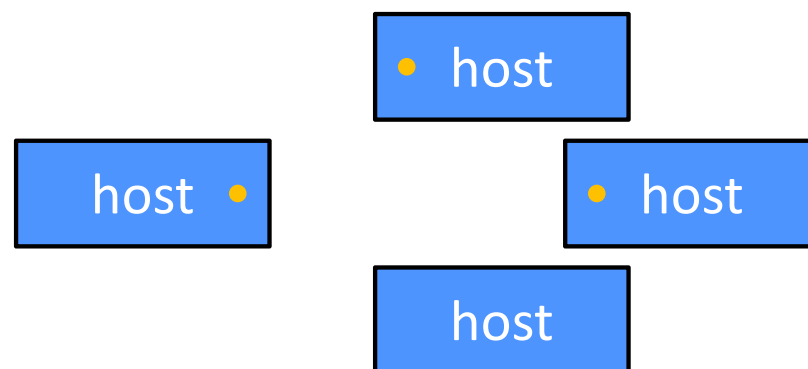

2) Communicate:

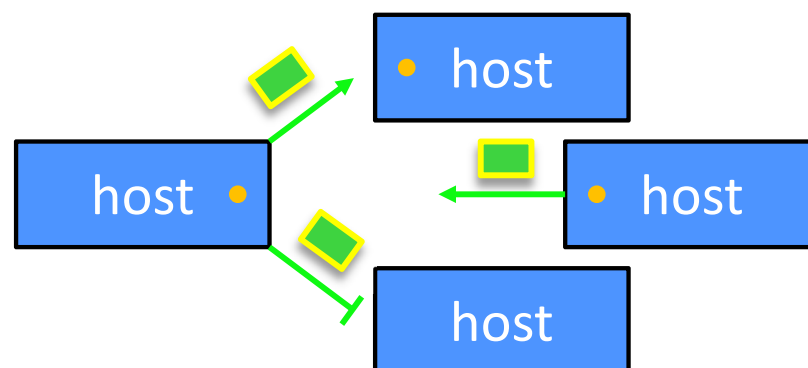

The Sockets API

- ❖ Berkeley sockets originated in 4.2BSD Unix (1983)
 - It is the standard API for network programming
 - Available on most OSs
 - ★ ■ Written in C
- ❖ POSIX Socket API
 - A slight update of the Berkeley sockets API
 - A few functions were deprecated or replaced
 - Better support for multi-threading was added

Socket API: Client TCP Connection

- ❖ We'll start by looking at the API from the point of view of a client connecting to a server over TCP

- ❖ There are five steps:

- 1) Figure out the IP address and port to which to connect *★ today*
- 2) Create a socket
- 3) Connect the socket to the remote server
- 4) **read** () and **write** () data using the socket
- 5) Close the socket

new

you've used before

for file I/O

Step 1: Figure Out IP Address and Port

- ❖ Several parts:
 - Network addresses
 - Data structures for address info
 - DNS (Domain Name System) – finding IP addresses

IPv4 Network Addresses

- ❖ An IPv4 address is a **4-byte** tuple *(2^{32} addresses)*
 - For humans, written in “dotted-decimal notation”
 - *e.g.* 128.95.4.1 (80 : 5f : 04 : 01 in hex)
- ❖ IPv4 address exhaustion
 - There are $2^{32} \approx 4.3$ billion IPv4 addresses
 - There are ≈ 7.77 billion people in the world (February 2020)

IPv6 Network Addresses

- ❖ An IPv6 address is a **16-byte** tuple (2^{128} addresses)
 - Typically written in “hextets” (groups of 4 hex digits)
 - ① • Can omit leading zeros in hextets
 - ② • Double-colon replaces consecutive sections of zeros
 - *e.g.* ~~2d01:0db8:f188:0000:0000:0000:0000:1f33~~
 - Shorthand: 2d01:db8:f188::1f33
 - Transition is still ongoing
 - IPv4-mapped IPv6 addresses
 - 128.95.4.1 mapped to `::ffff:128.95.4.1` or `::ffff:805f:401`
 - This unfortunately makes network programming more of a headache ☹

Linux Socket Addresses


- ❖ Structures, constants, and helper functions available in `#include <arpa/inet.h>`
- ❖ Addresses stored in **network byte order** (big endian)
- ❖ Converting between host and network byte orders:
 - `uint32_t htonl(uint32_t hostlong);`
 - `uint32_t ntohl(uint32_t netlong);`
 - 'h' for host byte order and 'n' for network byte order
 - Also versions with 's' for short (`uint16_t` instead)
- ❖ How to handle both IPv4 and IPv6?
 - Use C structs for each, but make them somewhat similar
 - Use defined constants to differentiate when to use each: `AF_INET` for IPv4 and `AF_INET6` for IPv6 *(many other socket types exist!)*
↑ address family

IPv4 Address Structures

```
// IPv4 4-byte address
struct in_addr {
    uint32_t s_addr;           // Address in network byte order
};


// An IPv4-specific address structure
struct sockaddr_in {
    sa_family_t    sin_family; // Address family: AF_INET
    in_port_t      sin_port;   // Port in network byte order (16 bits)
    struct in_addr sin_addr;   // IPv4 address
    unsigned char  sin_zero[8]; // Pad out to 16 bytes
};
```

struct sockaddr_in:

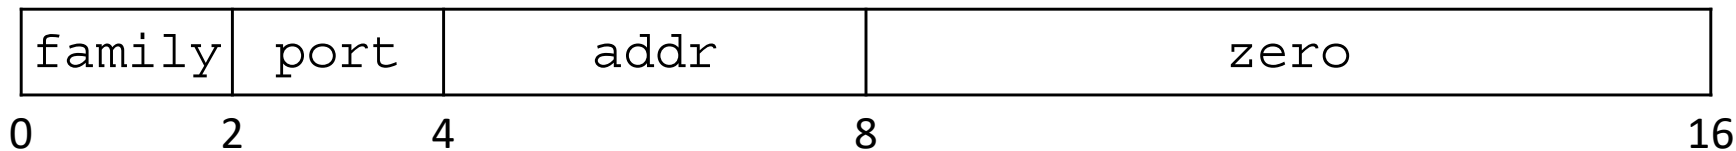

Practice Question

- ❖ Assume we have a `struct sockaddr_in` that represents a socket connected to 198.35.26.96 (c6:23:1a:60) on port 80 (0x50) stored on a little-endian machine.
 - `AF_INET = 2`
 - Fill in the bytes in memory below (in hex):

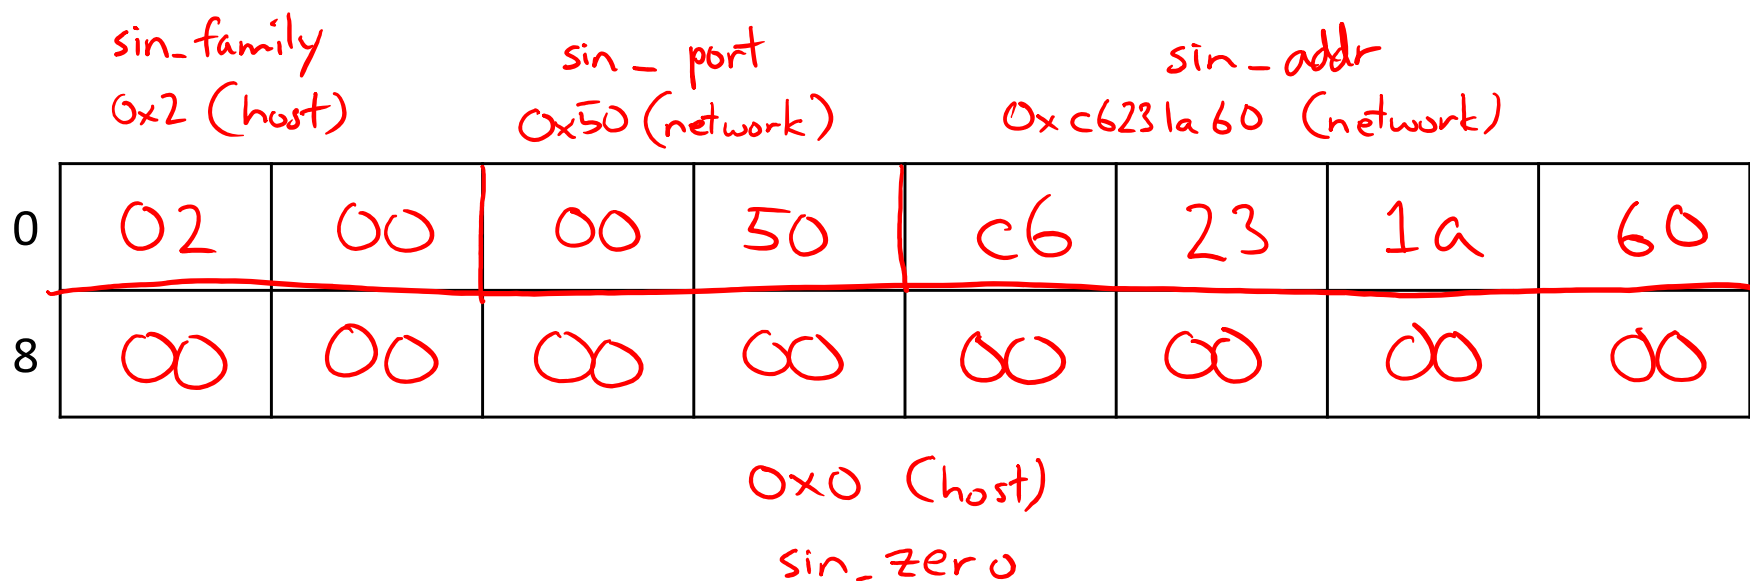


IPv6 Address Structures

```

// IPv6 16-byte address
struct in6_addr {
    uint8_t s6_addr[16]; // Address in network byte order
};

// An IPv6-specific address structure
struct sockaddr_in6 {
    sa_family_t sin6_family; // Address family: AF_INET6
    in_port_t sin6_port; // Port number
    uint32_t sin6_flowinfo; // IPv6 flow information
    struct in6_addr sin6_addr; // IPv6 address
    uint32_t sin6_scope_id; // Scope ID
};
    
```

struct sockaddr_in6:

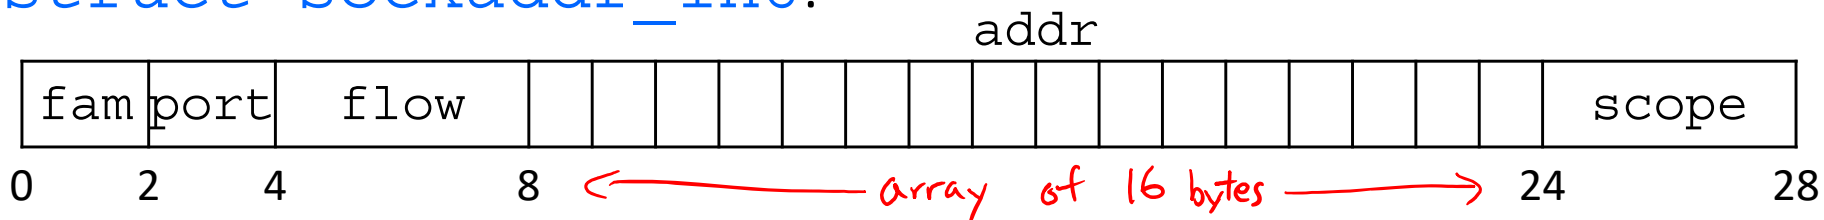

Generic Address Structures

struct sockaddr *

```
// A mostly-protocol-independent address structure.
// Pointer to this is parameter type for socket system calls.
struct sockaddr {
    sa_family_t sa_family;    // Address family (AF_* constants)
    char        sa_data[14]; // Socket address (size varies
                             // according to socket domain)
};

// A structure big enough to hold either IPv4 or IPv6 structs
// (at least 28 bytes)
struct sockaddr_storage {
    sa_family_t ss_family;    // Address family

    // padding and alignment; don't worry about the details
    char __ss_pad1[_SS_PAD1SIZE];
    int64_t __ss_align;
    char __ss_pad2[_SS_PAD2SIZE];
};
```

- Commonly create `struct sockaddr_storage`, then pass pointer cast as `struct sockaddr*` to `connect()`

Address Conversion

- address family*
- string representation*
- output parameter (struct in_addr* or struct in6_addr*)*
- ❖ `int inet_pton(int af, const char* src, void* dst);`
 - Converts human-readable string representation (“presentation”) to network byte ordered address
 - Returns **1** (success), **0** (bad src), or **-1** (error)

```
#include <stdlib.h>
#include <arpa/inet.h>

int main(int argc, char **argv) {
    struct sockaddr_in sa;    // IPv4
    struct sockaddr_in6 sa6; // IPv6

    // IPv4 string to sockaddr_in (192.0.2.1 = C0:00:02:01).
    inet_pton(AF_INET, "192.0.2.1", &(sa.sin_addr));

    // IPv6 string to sockaddr_in6.
    inet_pton(AF_INET6, "2001:db8:63b3:1::3490", &(sa6.sin6_addr));

    return EXIT_SUCCESS;
}
```

genaddr.cc

Address Conversion

address
family

struct in_addr* or
struct in6_addr*

```
❖ const char* inet_ntop(int af, const void* src,
                        char* dst, socklen_t size);
```

- Converts network addr in `src` into buffer `dst` of size `size`
- Returns `dst` on success; `NULL` on error

```
#include <stdlib.h>
#include <arpa/inet.h>
                                                                    genstring.cc

int main(int argc, char **argv) {
    struct sockaddr_in6 sa6;           // IPv6
    char astring[INET6_ADDRSTRLEN];   // IPv6

    // IPv6 string to sockaddr_in6.
    inet_pton(AF_INET6, "2001:0db8:63b3:1::3490", &(sa6.sin6_addr));

    // sockaddr_in6 to IPv6 string.
    inet_ntop(AF_INET6, &(sa6.sin6_addr), astring, INET6_ADDRSTRLEN);
    std::cout << astring << std::endl; // 2001:0db8:63b3:1::3490


    return EXIT_SUCCESS;
}
```

Domain Name System

- ❖ People tend to use DNS names, not IP addresses
 - The Sockets API lets you convert between the two
 - It's a complicated process, though:
 - A given DNS name can have many IP addresses
 - Many different IP addresses can map to the same DNS name
 - An IP address will reverse map into at most one DNS name
 - A DNS lookup may require interacting with many DNS servers

- ❖ You can use the Linux program “dig” to explore DNS
 - `dig @server name type (+short)`
 - `server`: specific name server to query
 - `type`: A (IPv4), AAAA (IPv6), ANY (includes all types)

DNS Hierarchy

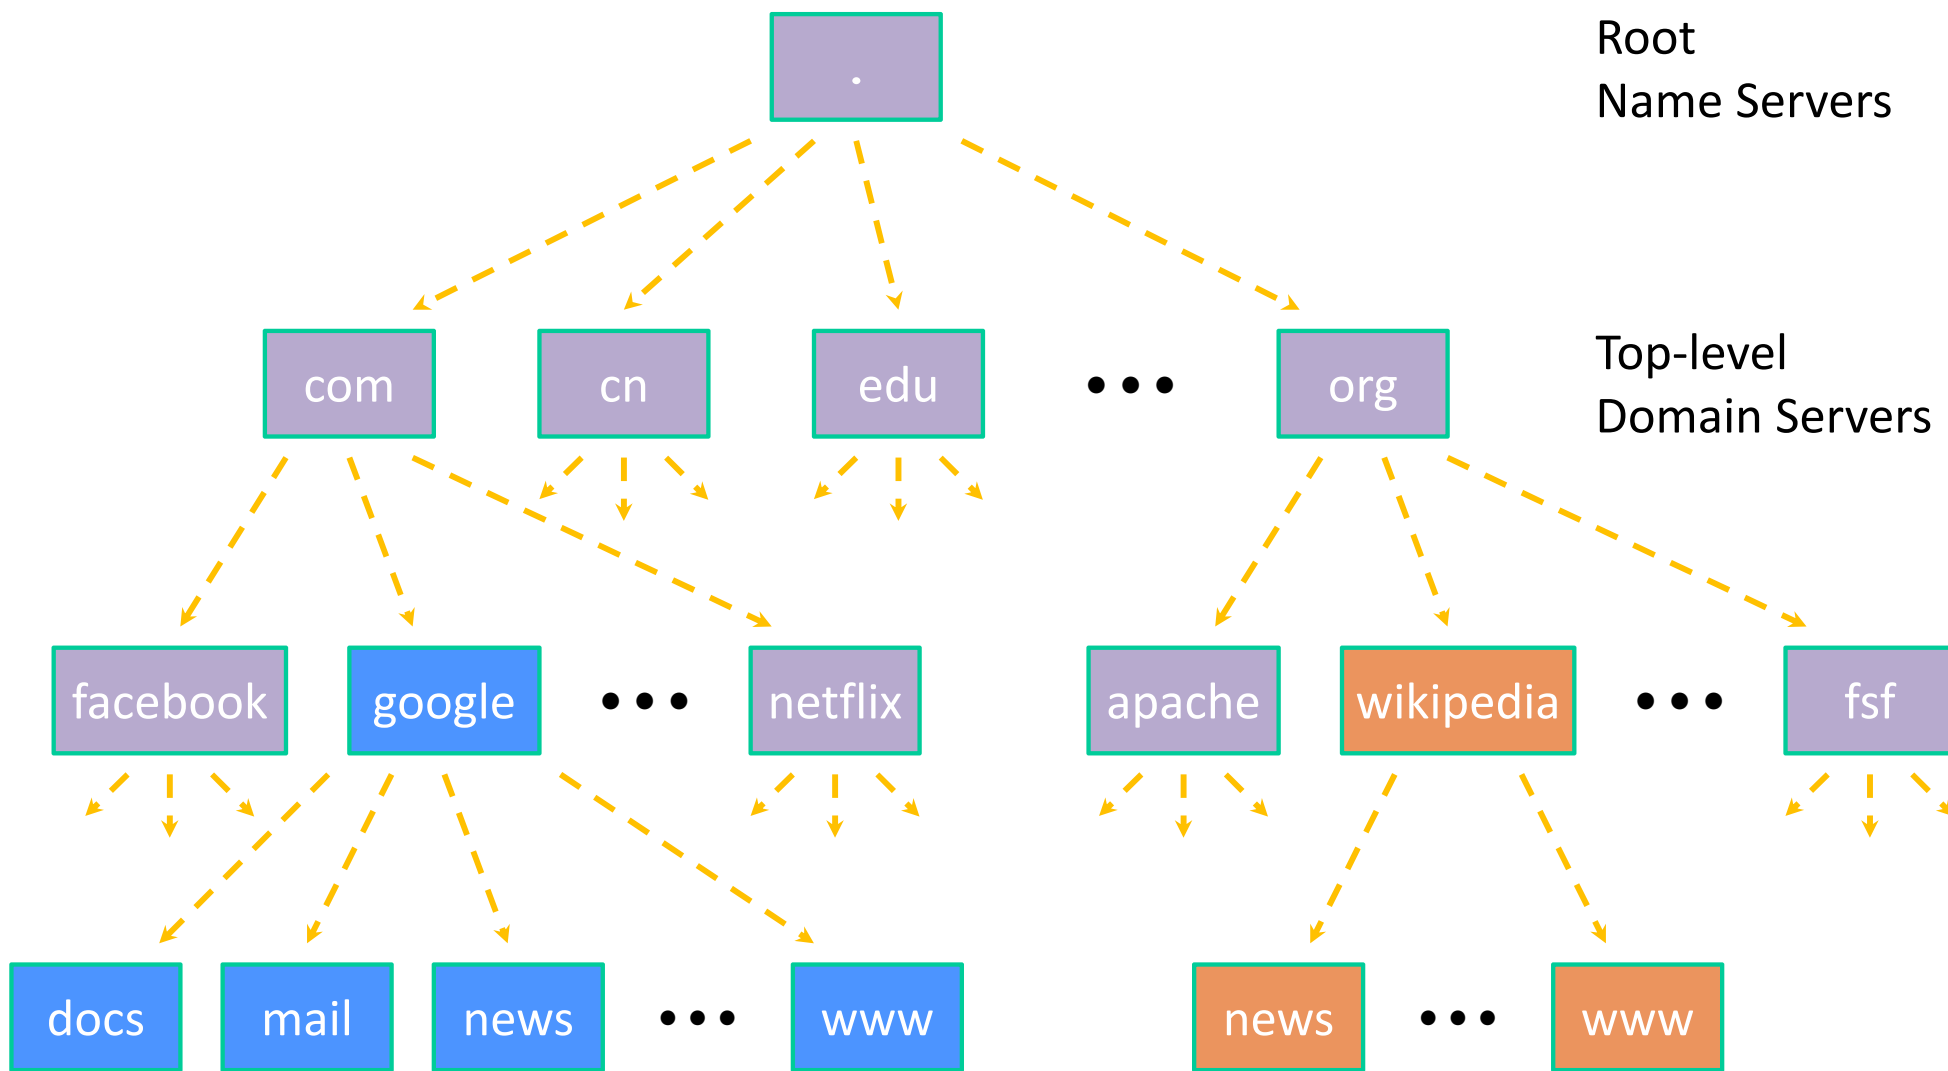

Resolving DNS Names

❖ The POSIX way is to use `getaddrinfo()`

■ A complicated system call found in `#include <netdb.h>`

```
int getaddrinfo(const char* hostname,
               const char* service,
               const struct addrinfo* hints,
               struct addrinfo** res);
```

- Tell `getaddrinfo()` which host and port you want resolved
 - String representation for host: DNS name or IP address
- Set up a “`hints`” structure with constraints you want respected
- `getaddrinfo()` gives you a list of results packed into an “`addrinfo`” structure/linked list
 - Returns `0` on success; returns *negative number* on failure
- Free the `struct addrinfo` later using `freeaddrinfo()`
recursively frees res linked list

getaddrinfo

○ "don't care" options

❖ `getaddrinfo()` arguments:

- `hostname` – domain name or IP address string
- `service` – port # (e.g. "80") or service name (e.g. "www")
or `NULL/nullptr`

```
struct addrinfo {
    int      ai_flags;           // additional flags
    int      ai_family;         // AF_INET, AF_INET6, AF_UNSPEC
    int      ai_socktype;       // SOCK_STREAM, SOCK_DGRAM, 0
    int      ai_protocol;       // IPPROTO_TCP, IPPROTO_UDP, 0
    size_t   ai_addrlen;        // length of socket addr in bytes
    ★ struct sockaddr* ai_addr; // pointer to socket addr
    char*    ai_canonname;      // canonical name
    struct addrinfo* ai_next; // can form a linked list
};
```

DNS Lookup Procedure

```
struct addrinfo {
    int      ai_flags;           // additional flags
    int      ai_family;         // AF_INET, AF_INET6, AF_UNSPEC
    int      ai_socktype;       // SOCK_STREAM, SOCK_DGRAM, 0
    int      ai_protocol;       // IPPROTO_TCP, IPPROTO_UDP, 0
    size_t   ai_addrlen;        // length of socket addr in bytes
    struct sockaddr* ai_addr;    // pointer to socket addr
    char*    ai_canonname;      // canonical name
    struct addrinfo* ai_next;    // can form a linked list
};
```

- 1) Create a `struct addrinfo` hints
- 2) Zero out hints for “defaults”
- 3) Set specific fields of hints as desired
- 4) Call `getaddrinfo()` using `&hints`
- 5) Resulting linked list `res` will have all fields appropriately set

✧ See [dnsresolve.cc](https://www.dnsresolve.cc)