


# CSE 333

## Section 8

HW4, Boost and Concurrency

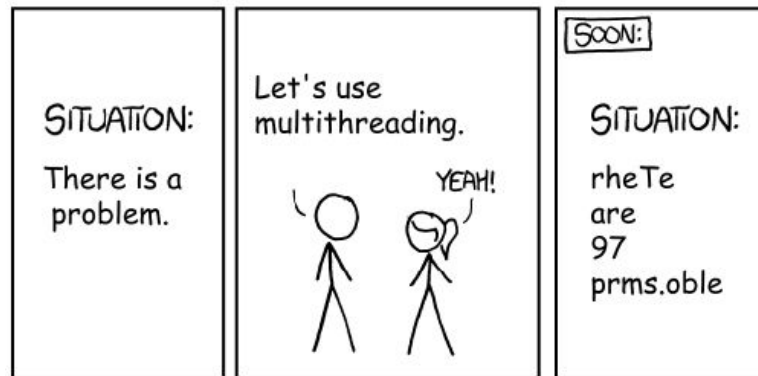

# Logistics

- Exercise 11
  - Due (tomorrow) **Friday (8/12) @ 11:00am**
- Exploration Paper
  - Due by next **Friday (8/19) @ 11:59pm**
- Homework 4
  - Due next **Wednesday (8/17) @ 11:59pm**

**pthread**



# Concurrency with pthreads

- EX12 and HW4 both use pthreads to create thread concurrency

Creation	<code>pthread_create</code>	<b>Parent: “Go do this {function}”</b>
Termination	<code>pthread_exit</code> <code>start_routine</code> returns	<b>Child: “I’m done with my task!”</b>
	<code>pthread_cancel</code>	<b>Parent: “I changed my mind, you can stop now”</b>
Resource Clean-up	<code>pthread_join</code>	<b>Parent: “I’ll wait for you to finish and report back your result”</b> (resource persists until joined)
	<code>pthread_detach</code>	<b>Parent: “You’re free now, go forth and prosper”</b> (automatically cleans up on termination)

# pthread\_create

```
#include <pthread.h>
int pthread_create( pthread_t *thread,
                  const pthread_attr_t *attr,
                  void *(*start_routine) (void *),
                  void *arg);
```

- pthread\_create creates a new thread into \*thread, with attributes \*attr (NULL means default attributes)
- Returns 0 on success and an error number on error (can check against error constants)
- The new thread runs start\_routine(arg)
- Compile and link with -pthread.

# Other Ways Threads Terminate

- Let the thread function end by itself; work is done
- Thread calls `pthread_exit` (leaves thread leaves its own execution)
- Main thread calls `pthread_cancel` to close a child thread.
- The process exits from `main` or calling `exit`



# pthread\_exit

```
void pthread_exit(void *retval);
```



- Equivalent of `exit(retval);` for a thread instead of a process
  - This means it is called in the thread function (child thread)
  - Will only exit off the thread instead of the process (other threads will still run)
- The thread will automatically exit once it returns from `start_routine()`
  - `retval` is an output parameter to indicate success or failure (usually pass the address of a global variable to view).

# Synchronizing Threads – Called by Parent Thread

```
void pthread_join(pthread_t thread, void **retval);
```

- Waits for the thread specified by thread to terminate
- The thread equivalent of waitpid()
- The exit status of the terminated thread is placed in \*\*retval

```
int pthread_detach(pthread_t thread);
```

- Mark thread specified by thread as detached – it will clean up its resources as soon as it terminates



# Exercise 1



# Exercise 1

```
int g = 0;
void *worker(void *ignore) {
    for (int k = 1; k <= 3; k++) {
        g = g + k;
    }
    printf("g = %d\n", g);
    return NULL;
}
```

```
int main() {
    pthread_t t1, t2;
    int ignore;
    ignore = pthread_create(&t1, NULL, &worker, NULL);
    ignore = pthread_create(&t2, NULL, &worker, NULL);
    pthread_join(t1, NULL);
    pthread_join(t2, NULL);
    return EXIT_SUCCESS;
}
```

What are the possible outputs of this program?

What is the range of values that g can have at the end of the program?

# Exercise 1

```
int g = 0;
void *worker(void *ignore) {
    for (int k = 1; k <= 3; k++) {
        g = g + k;
    }
    printf("g = %d\n", g);
    return NULL;
}
```

```
int main() {
    pthread_t t1, t2;
    int ignore;
    ignore = pthread_create(&t1, NULL, &worker, NULL);
    ignore = pthread_create(&t2, NULL, &worker, NULL);
    pthread_join(t1, NULL);
    pthread_join(t2, NULL);
    return EXIT_SUCCESS;
}
```

What are the possible outputs of this program?

Lots of possible answers, here are a few:

g = 6	g = 12	g = 7	g = 6
g = 12	g = 12	g = 9	g = 11

# Exercise 1

```
int g = 0;
void *worker(void *ignore) {
    for (int k = 1; k <= 3; k++) {
        g = g + k;
    }
    printf("g = %d\n", g);
    return NULL;
}
```

```
int main() {
    pthread_t t1, t2;
    int ignore;
    ignore = pthread_create(&t1, NULL, &worker, NULL);
    ignore = pthread_create(&t2, NULL, &worker, NULL);
    pthread_join(t1, NULL);
    pthread_join(t2, NULL);
    return EXIT_SUCCESS;
}
```

What is the range of values that g can have at the end of the program?

$g = [4 - 12]$

# Getting 4 from Exercise 1

## Thread 1

$reg \leftarrow g$

$g \leftarrow reg + 1$

$reg \leftarrow g$

$g \leftarrow reg + 2$

$reg \leftarrow g$

$g \leftarrow reg + 3$

$g = 4$

## Thread 2

$reg \leftarrow g$

$g \leftarrow reg + 1$

$reg \leftarrow g$

$g \leftarrow reg + 2$

$reg \leftarrow g$


$g \leftarrow reg + 3$

Store 0 in reg

Write g=1

Store 1 in reg

Write g=4

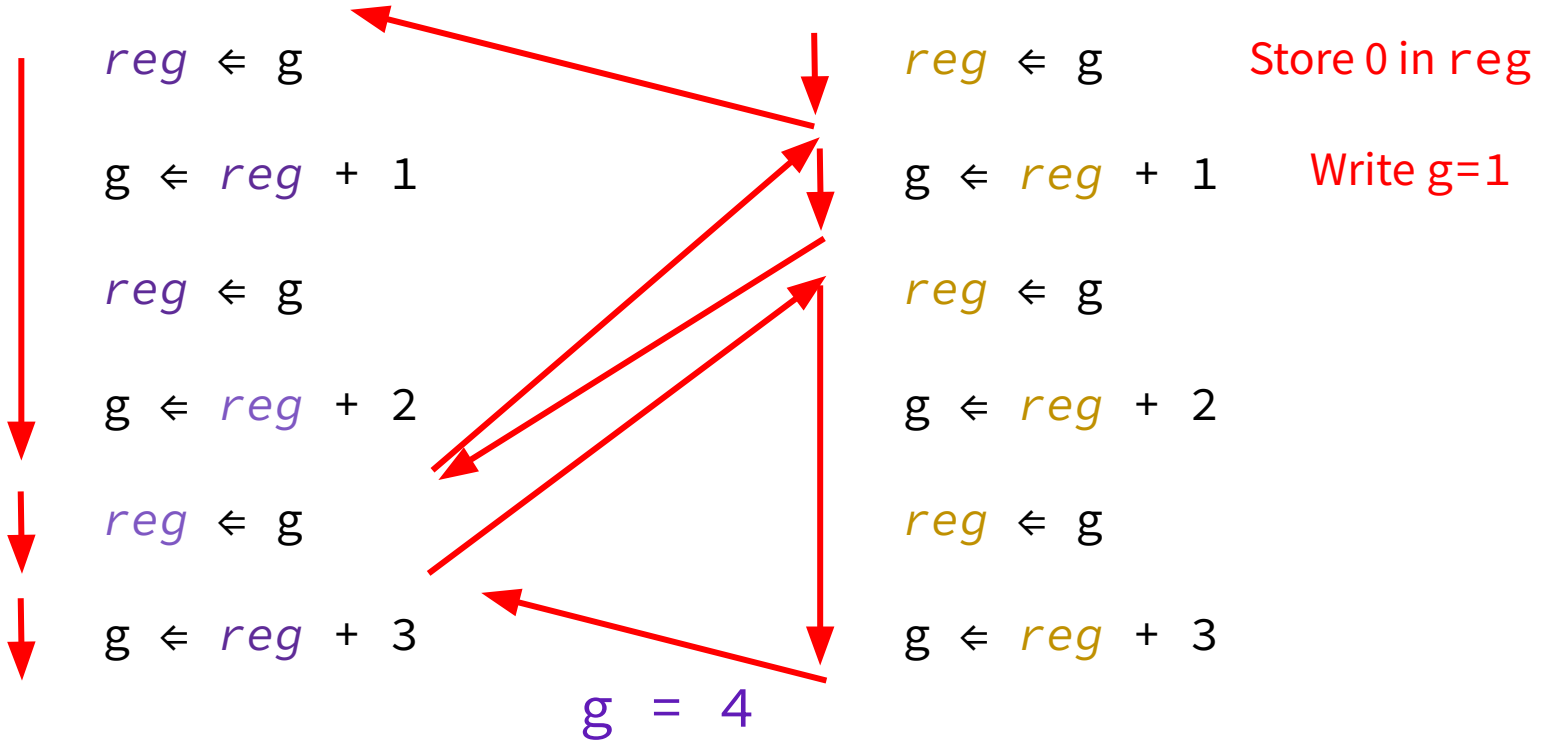


# Synchronization



# Synchronization

- Threads share an address space and system resources
- This makes it easy to communicate, but how do you avoid a total free-for-all?
- Protect your critical sections with locks!
  - Make sure nothing gets lost!
  - We'll be using "pthread\_mutex"

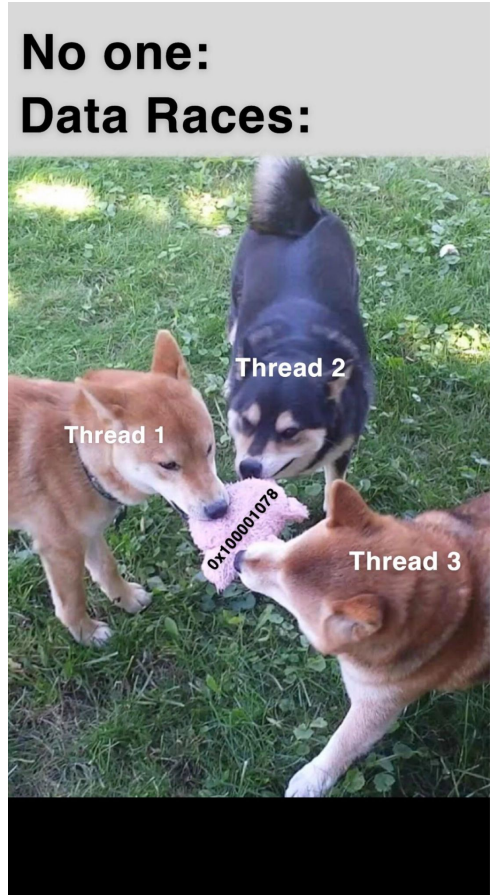

# Locking with pthread\_mutex

```
int pthread_mutex_init(pthread_mutex_t *mutex,  
                       const pthread_mutexattr_t *attr);
```

- Initializes the mutex lock pointed to by mutex with lock attributes specified by attr.
- attr can be NULL.

```
int pthread_mutex_destroy(pthread_mutex_t *mutex);
```

- Destroys the lock
- Cleans up resource

# Locking with pthread\_mutex

```
int pthread_mutex_lock(pthread_mutex_t *mutex);
```

- Grabs the lock
- If resource is locked, function will be blocked until resource is unlocked

```
int pthread_mutex_unlock(pthread_mutex_t *mutex);
```

- Releases the lock



# Problems with Synchronization

- Sharing Resources
  - Must be allocated / deallocated **exactly once**
  - Don't use deallocated resources from other threads



# Problems with Synchronization

- Sharing Resources
  - Must be allocated / deallocated **exactly once**
  - Don't use deallocated resources from other threads
- Locking is hard!
  - Too much, and performance is **worse than sequential**
  - Too little, and threads clash - **often unexpected results (unwanted interleaving)**
  - Not careful, and **deadlock** freezes your program forever!



# Locking

- Locking is hard!
  - Too much, and performance is **worse than sequential**
  - Too little, and threads clash - **often unexpected results (unwanted interleaving)**
  - Not careful, and **deadlock** freezes your program forever!

```
pthread_mutex_lock(&lock);  
if (!do_computation(resource)) {  
    printf("Error doing computation\n");  
    return false; // we are still holding the lock. Deadlock!  
}  
pthread_mutex_unlock(&lock);  
return true;
```

# Exercise 2



# Exercise 2

```
// Assume all necessary libraries
and header files are included
const int NUM_TAS = 10;

static int bank_accounts[NUM_TAS];
static pthread_mutex_t sum_lock;

void *thread_main(void *arg) {
    int *TA_index = static_cast<int
*>(arg);

    pthread_mutex_lock(&sum_lock);
    bank_accounts[*TA_index] += 1000;
    pthread_mutex_unlock(&sum_lock);

    delete TA_index;
    return nullptr;
}
```

```
int main(int argc, char **argv) {
    pthread_t thds[NUM_TAS];
    pthread_mutex_init(&sum_lock, nullptr);

    for (int i = 0; i < NUM_TAS; i++) {
        int *num = new int(i);
        if (pthread_create(&thds[i], nullptr, &thread_main, num) != 0){
            /*report error*/
        }
    }

    for (int i = 0; i < NUM_TAS; i++) {
        cout << bank_accounts[i] << endl;
    }

    pthread_mutex_destroy(&sum_lock);
    return 0;
}
```

# Exercise 2

- a. Does the program increase the TAs' bank accounts correctly? Why or why not?
- b. Could we implement this program using processes instead of threads? Why would or why wouldn't we want to do this?
- c. Assume that all the problems, if any, are now fixed. The student discovers that the program they wrote is kinda slow even though its a multithreaded program. Why might it be the case? And how would you fix that?

# Exercise 2

a) Does the program increase the TAs' bank accounts correctly? Why or why not?

No, it's not correct. It requires main to call `pthread_join` to wait for each thread to finish before exiting the main program.

`pthread_exit()` will let a child thread finish leave to its parent, but it needs to be used in conjunction with `pthread_join` in order to check the results of the child thread.

## Exercise 2

b) Could we implement this program using processes instead of threads? Why would or why wouldn't we want to do this?

We could, but doing so would require some way for the processes to communicate with each other so that the data structure can be “shared” (remember that inter-process communication can be difficult and time consuming).

It is much easier to just use threads since each thread could directly access the data structure.

## Exercise 2

c) Assume that all the problems, if any, are now fixed. The student discovers that the program they wrote is kinda slow even though its a multithreaded program. Why might it be the case? And how would you fix that?

```
thread_mutex_lock(&sum_lock);  
bank_accounts[*TA_index] += 1000;  
pthread_mutex_unlock(&sum_lock);
```

```
thread_mutex_lock(&acct_lcks[*TA_index]);  
bank_accounts[*TA_index] += 1000;  
pthread_mutex_unlock(&acct_lks[*TA_index]);
```

Only one thread can increase the value of one account at a time and there is no difference from incrementing each account sequentially because we only have a single lock on this line for every single thread to share.



To fix this, we can have one lock per account so that multiple threads can increment the account at the same time. (An alternative solution is to just not use locks as well since the threads made will not conflict with each other, but we should aim for safe options for the bank accounts)

# HW4 Overview



# Web Server

1. Establish client connections
  - a. Server socket set up  
in hw4/ServerSocket.cc
2. Read client requests
  - a. Parse HTTP requests  
in hw4/HttpConnection.cc
3. Respond to requests
  - a. Write HTTP responses  
in hw4/HttpServer.cc
4. Fix security vulnerabilities
  - a. Escape characters  
in hw4/Utils.cc



Steps 2, 3, and 4 involve a lot of string manipulation which can be tedious!

# Boost Library



# Boost

Boost is a free C++ library that provides support for various tasks in C++

- **Note:** Boost does NOT follow the Google style guide!!!
- These will be helpful for you in hw4 to parse HTTP Requests!

Boost adds many string algorithms that you may have seen in Java

- Include with `#include <boost/algorithm/string.hpp>`
- Documentation: [https://www.boost.org/doc/libs/1\\_60\\_0/doc/html/string\\_algo.html](https://www.boost.org/doc/libs/1_60_0/doc/html/string_algo.html)
- The worksheet contains some examples (googling helps as well)

# Helpful Functions

```
void boost::trim(string& input);
```

- Removes all leading and trailing whitespace from the string
- `input` is an input *and* output parameter (non-const reference)

```
void boost::replace_all(string& input, const string& search,  
                        const string& format);
```

- Replaces all instances of `search` inside `input` with `format`

# Helpful Functions

```
void boost::split(vector<string>& output,  
                 const string& input,  
                 boost::PredicateT match_on,  
                 boost::token_compress_mode_type compress);
```

- Split the string by the characters in match\_on

```
boost::PredicateT boost::is_any_of(const string& tokens);
```

- Returns predicate that matches on any of the characters in tokens

**telnet**



# Using telnet with HW4

1. Launch the server

```
./http333d <port> ../projdocs/ unit_test_indices/*
```

2. Connect with telnet

```
telnet <HostName> <port>
```

3. Write an HTTP request and send it

4. To exit telnet:

- **Ctrl+]** then **Ctrl+d**, and type quit

# Writing an HTTP Request

- Example HTTP Request layout can be found in `HttpRequest.h`
- Example HW4 file request:
  - `GET /static/test_tree/books/artofwar.txt HTTP/1.1`
- Example HW4 query request:
  - `GET /query?terms=books+of+war HTTP/1.1`
- To send a request, hit [Enter] **twice**
- Compare the output of `solution_binaries/http333d` to `./http333d`

# Exercise 3 (Bonus)



## Exercise 3 (Bonus)

Write a function called `ExtractRequestLine()` that takes in a well-formatted HTTP request as a string and returns a map with the keys as `method`, `uri`, `version` and the values from the corresponding request.

### Example Input:

```
“GET /index.html HTTP/1\r\nHost: www.mywebsite.com\r\nConnection:  
keep-alive\r\nUpgrade-Insecure-Requests: 1\r\n\r\n”
```

### Map Returned:

```
{  
  “method” : “GET”  
  “uri” : “/index.html”  
  “version” : “HTTP/1.1”  
}
```

## Exercise 3 (Bonus)

```
map<string,string> ExtractRequestLine(const string& request) {  
    vector<string> lines;  
    boost::split(lines, request, boost::is_any_of("\r\n"),  
                boost::token_compress_on);  
    vector<string> components;  
    string firstLine = lines[0];  
    boost::split(components, firstLine, boost::is_any_of(" "),  
                boost::token_compress_on);  
    map<string, string> res;  
    res["method"] = components[0];  
    res["uri"] = components[1];  
    res["version"] = components[2];  
    return res;  
}
```