



# Poll Everywhere

[pollev.com/cse333](https://pollev.com/cse333)

**Which concept gave you the most difficulty in the context of Homework 2?**

- A. **The data structures**
- B. **C-string manipulations**
- C. **POSIX I/O**
- D. **Dynamic memory allocation**
- E. **GDB**
- F. **Style considerations**
- G. **Prefer not to say**

# C++ Inheritance I

CSE 333 Summer 2023

**Instructor:** Timmy Yang

**Teaching Assistants:**

Jennifer Xu

Leanna Nguyen

Pedro Amarante

Sara Deutscher

Tanmay Shah

# Relevant Course Information

- ❖ Exercise 8 out today, due next Monday (7/24)
- ❖ Mid-quarter survey closes tonight (7/21) @ 11:59pm
- ❖ Quiz 1 grades out!
  - Regrades close Saturday (7/22) @ 11:59pm
- ❖ Homework 3 spec out, files pushed to repos tonight
  - Due Thursday after next (8/03) @ 11:59pm
  - Partner sign-ups close at end of Thursday (7/27)
  - Get started early!
  - Videos for overview and file debugging demo
  - Lecture demo
- ❖ Quiz 2 page up, open Monday (7/24) @ 2:00 pm

# Overview of Next Two Lectures

## ❖ C++ inheritance

- **Review of basic idea** (pretty much the same as in Java)
- What's different in C++ (compared to Java)
  - **Static vs. dynamic dispatch – virtual functions and vtables** (optional)
  - Pure virtual functions, abstract classes, why no Java “interfaces”
  - Assignment slicing, using class hierarchies with STL
- Casts in C++

## ❖ Reference: *C++ Primer*, Chapter 15

# Lecture Outline

- ❖ **Inheritance motivation & C++ Syntax**
- ❖ Polymorphism & Dynamic Dispatch
- ❖ Virtual Tables & Virtual Table Pointers


# Stock Portfolio Example

- ❖ A portfolio represents a person's financial investments
  - Each *asset* has a cost (*i.e.*, how much was paid for it) and a market value (*i.e.*, how much it is worth)
    - The difference between the cost and market value is the *profit* (or loss)
  - Different assets compute market value in different ways
    - A **stock** that you own has a ticker symbol (*e.g.*, "GOOG"), a number of shares, share price paid, and current share price
    - A **dividend stock** is a stock that also has dividend payments
    - **Cash** is an asset that never incurs a profit or loss

(Credit: thanks to Marty Stepp for this example)

# Design Without Inheritance

- ❖ One class per asset type:

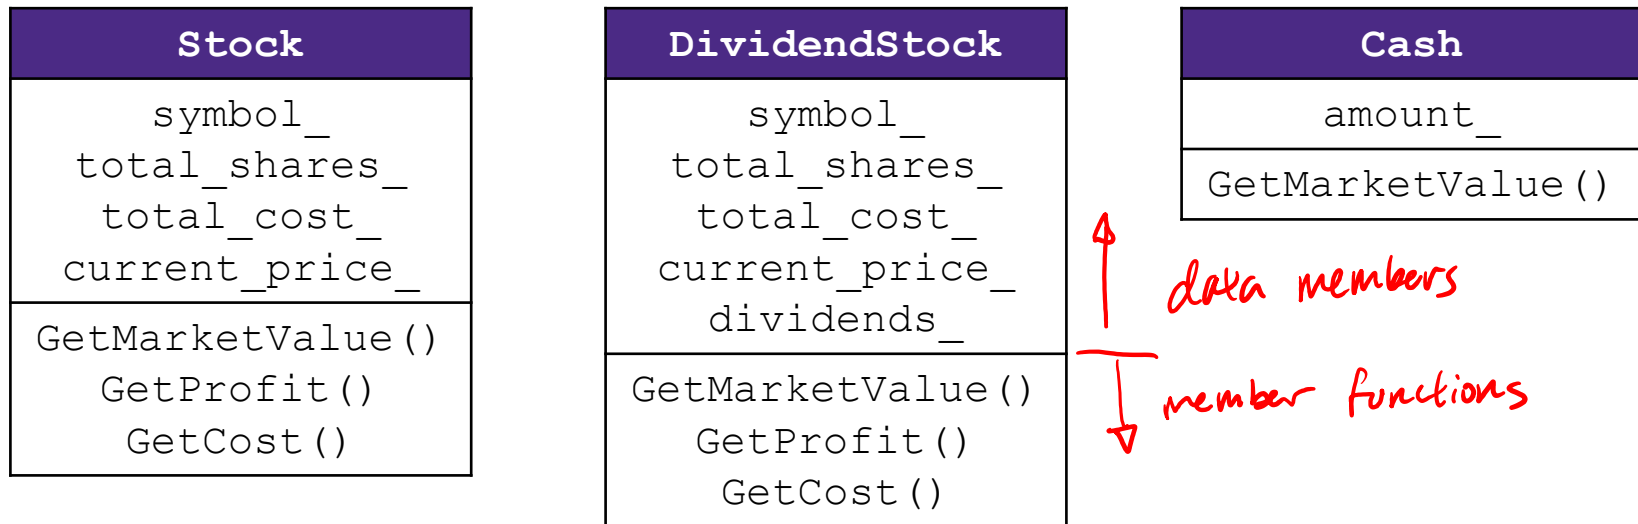

- Redundant!
- Cannot treat multiple investments together
  - e.g., can't have an array or `vector` of different assets

- ❖ See sample code in `initial/` directory

↑ can't mix unrelated types!

# Inheritance

- ❖ A parent-child “is-a” relationship between classes
  - A child (**derived class**) extends a parent (**base class**)

- ❖ Terminology:

*“higher” on hierarchy  
subset of subclass*

*“lower” on hierarchy  
superset of superclass*

Java	C++
Superclass	Base Class
Subclass	Derived Class


- Mean the same things. You’ll hear both.



# Inheritance

- ❖ A parent-child “is-a” relationship between classes
  - A child (**derived class**) extends a parent (**base class**)
  
- ❖ Benefits:
  - Code reuse
    - Children can automatically inherit code from parents
  - Polymorphism
    - Ability to redefine existing behavior but preserve the interface
    - Children can override the behavior of the parent
    - Others can make calls on objects without knowing which part of the inheritance tree it is in
  - Extensibility
    - Children can add behavior

# Design With Inheritance

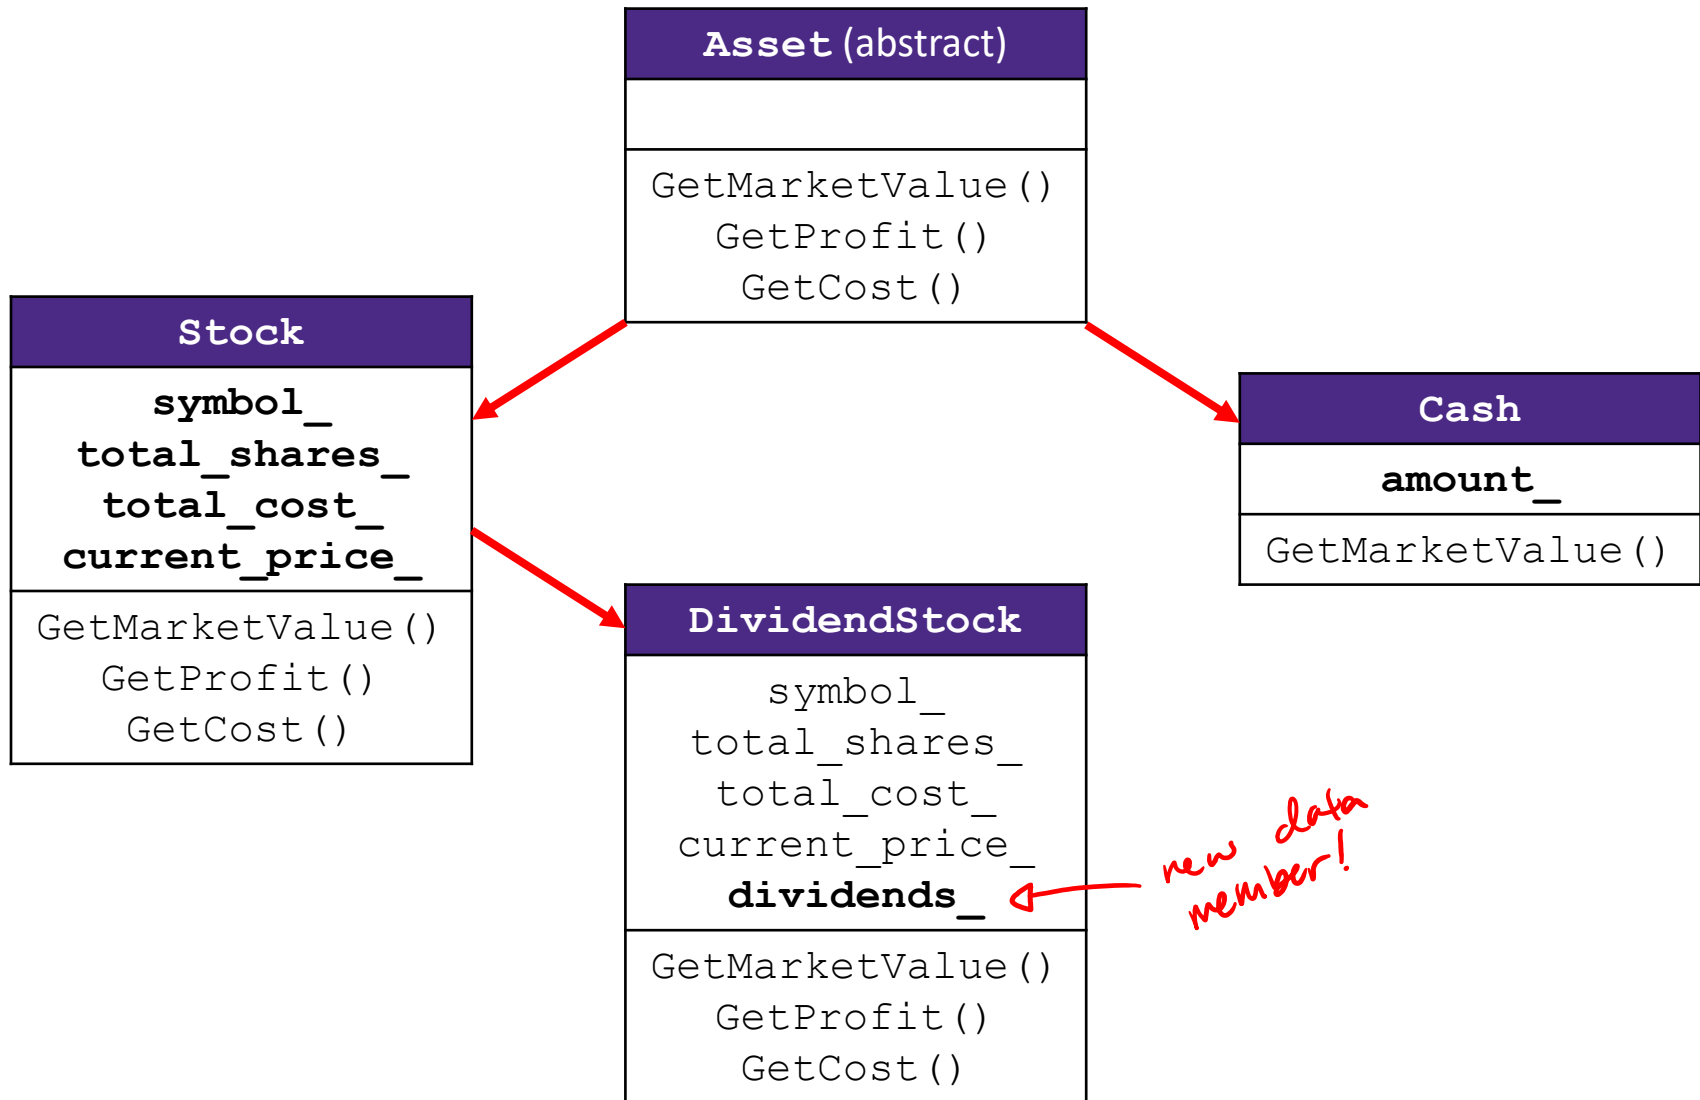

# Like Java: Access Modifiers

- ❖ `public`: visible to all other classes
- ❖ `protected`: visible to current class and its *derived* classes
- ❖ `private`: visible only to the current class
  
- ❖ Use `protected` for class members only when
  - Class is designed to be extended by derived classes
  - Derived classes must have access but clients should not be allowed

# Class Derivation List

- ❖ Comma-separated list of classes to inherit from:

```
#include "BaseClass.h"

class Name : public BaseClass {
    ...
};
```

- Focus on **single inheritance**, but multiple inheritance possible  
:public Base1, public Base2 {
- ❖ Almost always you will want **public inheritance**  
vs. :protected Base {
- Acts like `extends` does in Java
- Any member that is non-private in the base class is the same in the derived class; both *interface and implementation inheritance*
- ★ Except that constructors, destructors, copy constructor, and assignment operator are *never* inherited

# Back to Stocks


Stock
<code>symbol_</code> <code>total_shares_</code> <code>total_cost_</code> <code>current_price_</code>
<code>GetMarketValue()</code> <code>GetProfit()</code> <code>GetCost()</code>

BASE

DividendStock
<code>symbol_</code> <code>total_shares_</code> <code>total_cost_</code> <code>current_price_</code> <code>dividends_</code>
<code>GetMarketValue()</code> <code>GetProfit()</code> <code>GetCost()</code>

DERIVED

# Back to Stocks

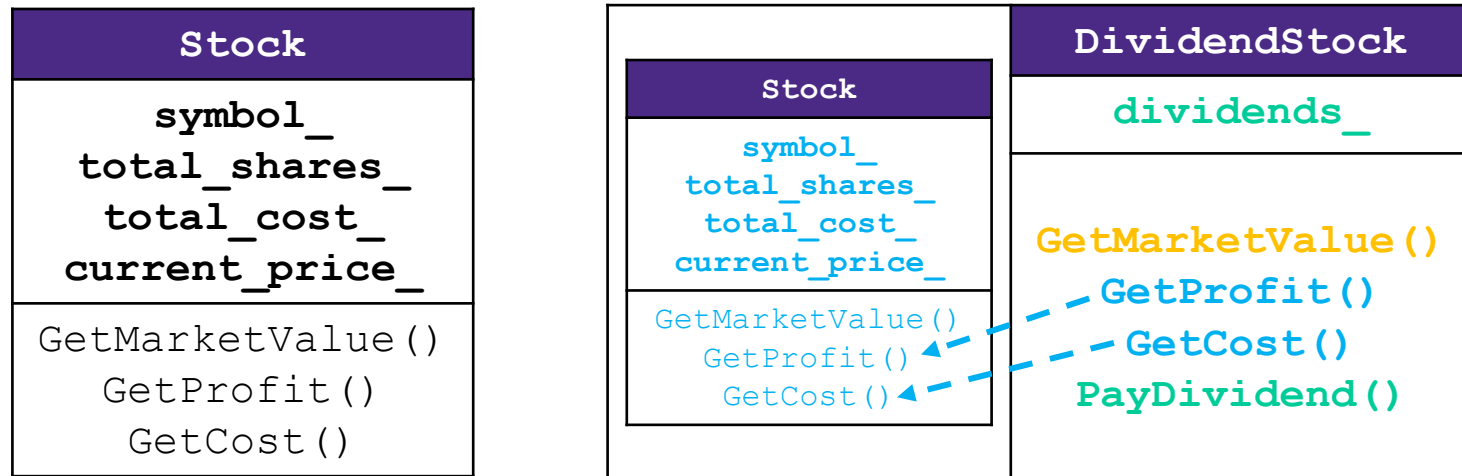

## ❖ A derived class:

- **Inherits** the behavior and state (specification) of the base class
- **Overrides** some of the base class' member functions (opt.)
- **Extends** the base class with new member functions, variables (opt.)

# Lecture Outline

- ❖ Inheritance motivation & C++ Syntax
- ❖ **Polymorphism & Dynamic Dispatch**
- ❖ Virtual Tables & Virtual Table Pointers

# Polymorphism in C++

- ❖ In Java: `DeclaredType var = new ActualType ();`
  - `var` is a reference (different term than C++ reference) to an object of `ActualType` on the Heap
  - `ActualType` must be the same class or a subclass of `DeclaredType`
- ❖ In C++: `DeclaredType* var_p = new ActualType ();`
  - `var_p` is a *pointer* to an object of `ActualType` on the Heap
  - `ActualType` must be the same or a derived class of `DeclaredType`
  - (also works with references)
  - `DeclaredType` defines the *interface* (i.e., what can be called on `var_p`), but `ActualType` may determine which *version* gets invoked



# Dynamic Dispatch (like Java)

- ❖ Usually, when a derived function is available for an object, we want the derived function to be invoked
  - This requires a run time decision of what code to invoke
- ❖ A member function invoked on an object should be the *most-derived function* accessible to the object's visible type
  - Can determine what to invoke from the object itself
    - ↳ DividendStock
    - ↳ Stock
- ❖ Example:
  - `void PrintStock (Stock* s) { s->Print (); }`
  - Calls the appropriate `Print ()` without knowing the actual type of `*s`, other than it is some sort of `Stock`

# Dynamic Dispatch Example

- ❖ When a member function is invoked on an object:
  - The *most-derived function* accessible to the object's visible type is invoked (decided at run time based on actual type of the object)

```
double DividendStock::GetMarketValue() const {  
    return get_shares() * get_share_price() + dividends_;  
}  
  
double "DividendStock"::GetProfit() const { // inherited  
    return GetMarketValue() - GetCost();  
}
```

DividendStock.cc

```
double Stock::GetMarketValue() const {  
    return get_shares() * get_share_price();  
}  
  
double Stock::GetProfit() const {  
    return GetMarketValue() - GetCost();  
}
```

Stock.cc

# Dynamic Dispatch Example


```
#include "Stock.h"
#include "DividendStock.h"

DividendStock dividend();
DividendStock* ds = &dividend;
Stock* s = &dividend;    // why is this allowed?

// Invokes DividendStock::GetMarketValue()
ds->GetMarketValue();

// Invokes DividendStock::GetMarketValue()
s->GetMarketValue();

// invokes Stock::GetProfit(), since that method is inherited.
// Stock::GetProfit() invokes DividendStock::GetMarketValue(),
// since that is the most-derived accessible function.
s->GetProfit();
```

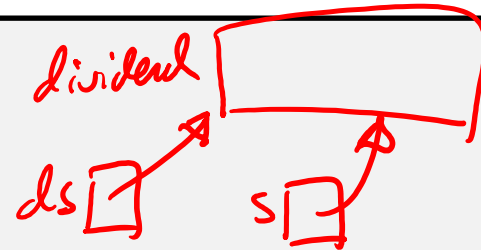

# Requesting Dynamic Dispatch (C++)

- ❖ Prefix the member function declaration with the `virtual` keyword
  - Derived/child functions don't need to repeat `virtual`, but was traditionally good style to do so
  - This is how method calls work in Java (no virtual keyword needed)
  - You almost always want functions to be virtual
- ❖ `override` keyword (C++11)
  - Tells compiler this method should be overriding an inherited virtual function – *always* use if available
  - Prevents overloading vs. overriding bugs
- ❖ Both of these are technically *optional* in derived classes
  - Be consistent and follow local conventions (Google Style Guide says no `virtual` if `override`)

# Most-Derived

 has def for Foo()

```
class A {
public:
    // Foo will use dynamic dispatch
    virtual void Foo();
};



class B : public A {
public:
    // B::Foo overrides A::Foo
    virtual void Foo();
};

class C : public B {
    // C inherits B::Foo()
};
```

```
void Bar() {
    A* a_ptr;
    C c;

    a_ptr = &c;

    // Whose Foo() is called?
    a_ptr->Foo();
    B::Foo();
}
```

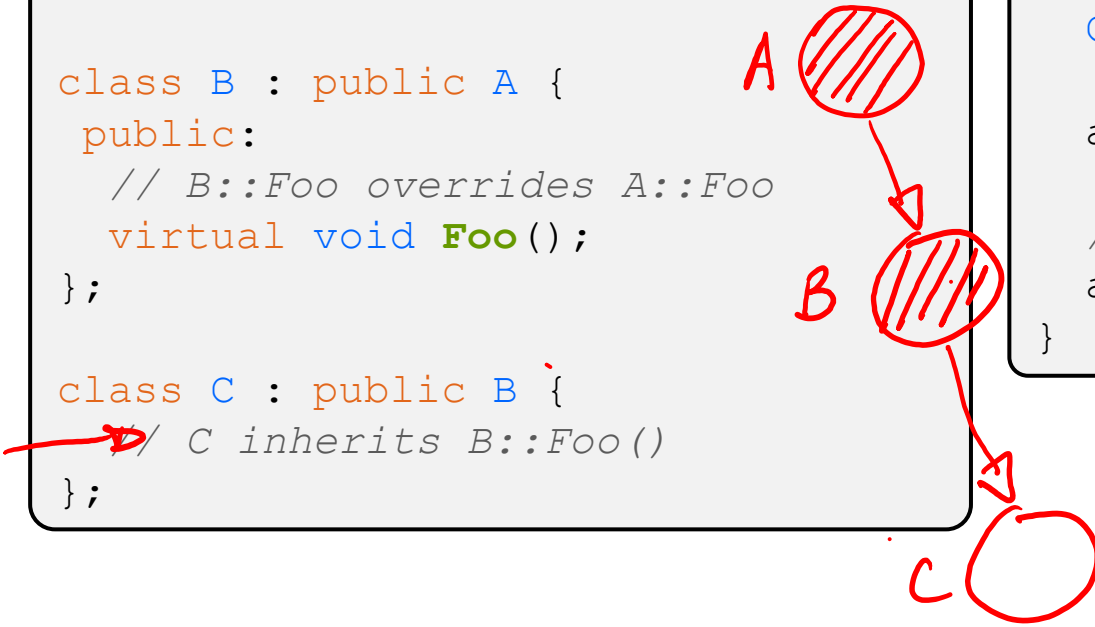

# Poll Everywhere

[pollev.com/cse333](http://pollev.com/cse333)

*has Foo()*


Whose **Foo ()** is called?

- |               | Q1            | Q2 |
|---------------|---------------|----|
| <del>A.</del> | A             | B  |
| <del>B.</del> | A             | D  |
| <b>C.</b>     | B             | B  |
| D.            | B             | D  |
| E.            | We're lost... |    |

```
void Bar () {
    A* a_ptr;
    C c;
    E e;

    // Q1:
    a_ptr = &c;
    a_ptr->Foo ();

    // Q2:
    a_ptr = &e;
    a_ptr->Foo ();
}
```

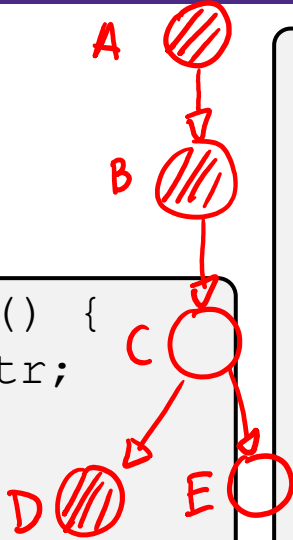

```
class A {
public:
    virtual void Foo ();
};

class B : public A {
public:
    virtual void Foo ();
};

class C : public B {
};

class D : public C {
public:
    virtual void Foo ();
};

class E : public C {
};
```

# Lecture Outline

- ❖ Inheritance motivation & C++ Syntax
- ❖ Polymorphism & Dynamic Dispatch
- ❖ **Virtual Tables & Virtual Table Pointers**

# How Can This Possibly Work?

- ❖ The compiler produces `Stock.o` from *just* `Stock.cc`
  - It doesn't know that `DividendStock` exists during this process
  - So then how does the emitted code know to call `Stock::GetMarketValue()` or `DividendStock::GetMarketValue()` or something else that might not exist yet?
    - **Function pointers!!!**

Stock.h

```
virtual double Stock::GetMarketValue() const;  
virtual double Stock::GetProfit() const;
```

```
double Stock::GetMarketValue() const {  
    return get_shares() * get_share_price();  
}
```

```
double Stock::GetProfit() const {  
    return GetMarketValue() - GetCost();  
}
```


Stock.cc



# vtables and the vptr

- ❖ If a class contains *any* virtual methods, the compiler emits:
  - A (single) virtual function table (**vtable**) for *the class* (1 per class)
    - Contains a function pointer for each virtual method in the class
    - The pointers in the vtable point to the most-derived function for that class
  - A virtual table pointer (**vptr**) for *each object instance* (1 per object)
    - A pointer to a virtual table as a “hidden” member variable
    - When the object’s constructor is invoked, the vptr is initialized to point to the vtable for the object’s class
    - Thus, the vptr “remembers” what class the object is

# 351 Throwback: Dynamic Dispatch

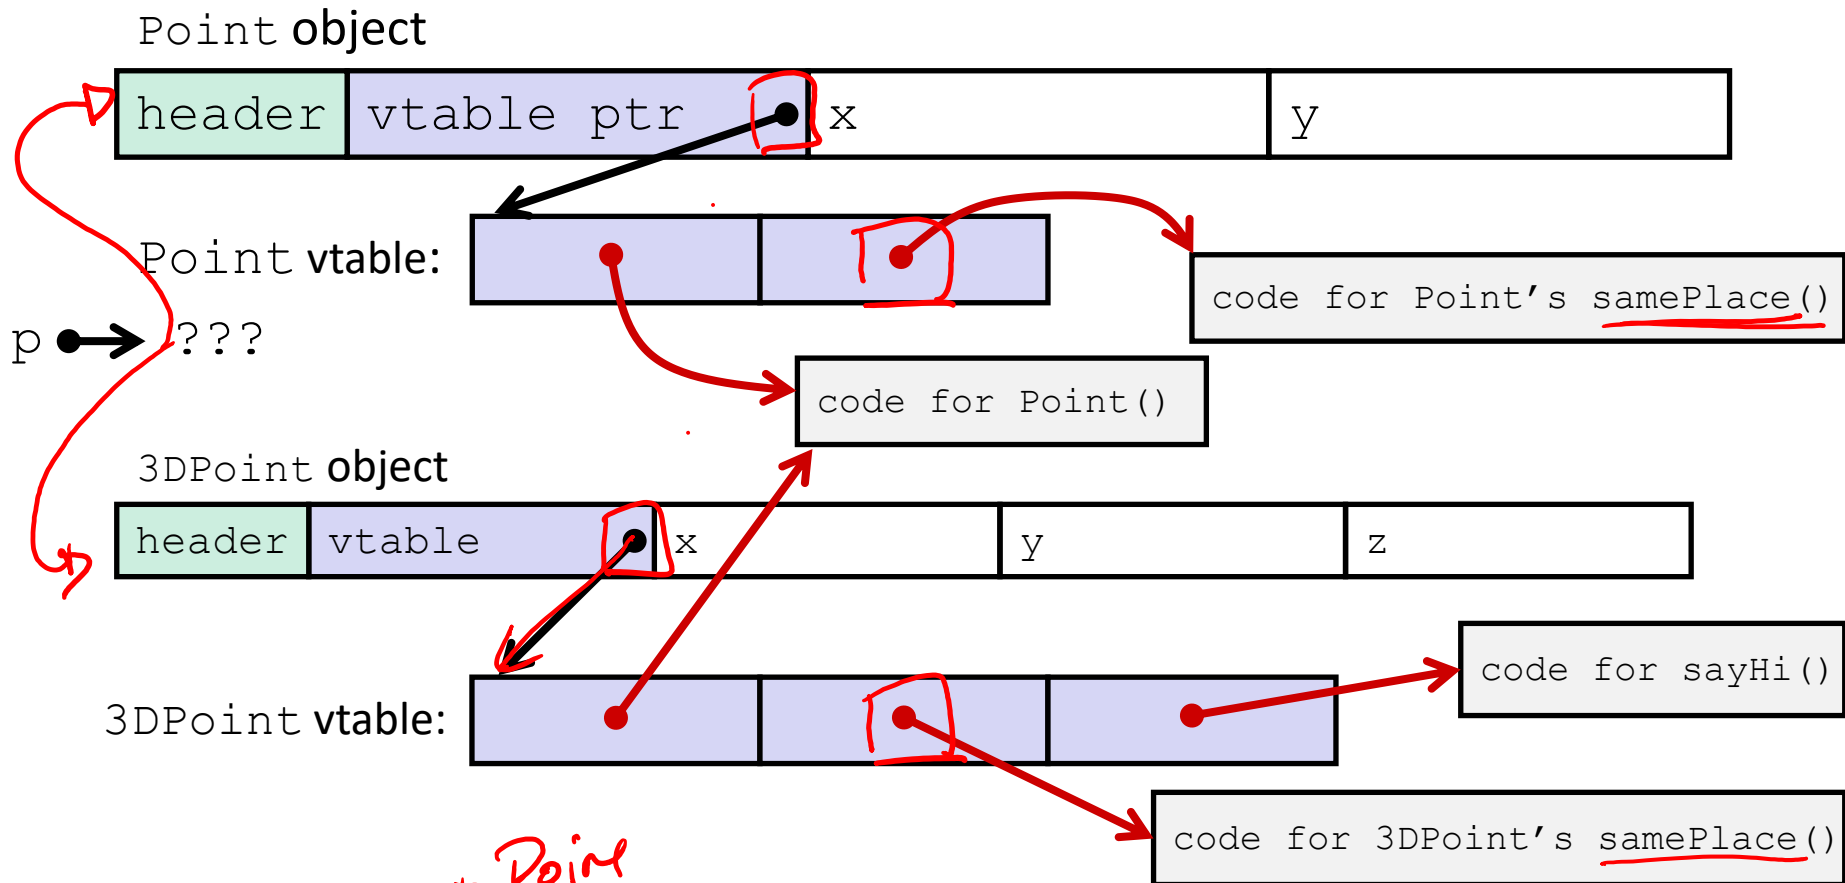

**Java:**

```
Point p = ???;
return p.samePlace(q);
```

*Point*  
*3DPoint*

**C pseudo-translation:**


```
// works regardless of what p is
return p->vtable[1](p, q);
```

# vtable/vptr Example

```
class Base {
public:
    virtual void F1();
    virtual void F2();
};

class Der1 : public Base {
public:
    virtual void F1();
};

class Der2 : public Base {
public:
    virtual void F2();
};
```

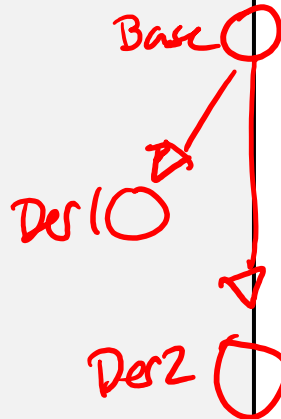

```
Base b;
Der1 d1;
Der2 d2;

Base* b0ptr = &b;
Base* b1ptr = &d1;
Base* b2ptr = &d2;


b0ptr->F1(); // Base::F1()
b0ptr->F2(); // Base::F2()

b1ptr->F1(); // Der1::F1()
b1ptr->F2(); // Base::F1()

b2ptr->F1(); // Base::F1()
b2ptr->F2(); // Der2::F2()

d2.F1(); // Base::F1()
```

# vtable/vptr Example

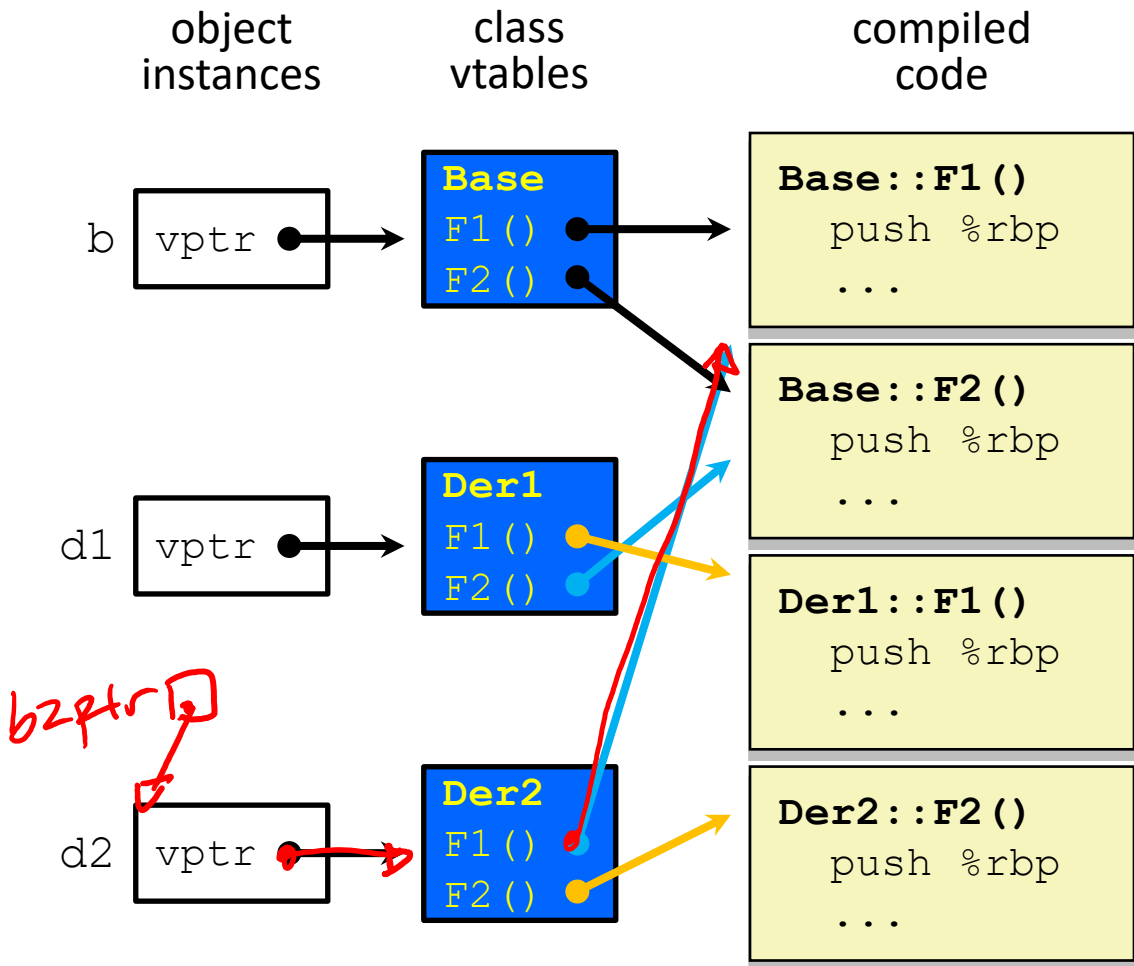

```

Base b;
Der1 d1;
Der2 d2;

Base* b2ptr = &d2;

b2ptr->F1();
// b2ptr -->
// d2.vptr -->
// Der2.vtable.F1 -->
// Base::F1()

d2.F1();
// d2.vptr -->
// Der2.vtable.F1 -->
// Base::F1()
    
```

*Direct call to correct function*

# Let's Look at Some Actual Code

- ❖ Let's examine the following code using `objdump`
  - `g++ -Wall -g -std=c++17 -o vtable vtable.cc`
  - `objdump -CDS vtable > vtable.d`

vtable.cc

```
class Base {
public:
    virtual void f1();
    virtual void f2();
};

class Der1 : public Base {
public:
    virtual void f1();
};

int main(int argc, char** argv) {
    Der1 d1;
    Base* bptr = &d1;
    bptr->f1();
    d1.f1();
}
```

*Search for  
vtable!  
Just an array  
of function  
pointers!*

# Abstract Classes

- ❖ Sometimes we want to include a function in a class but *only* implement it in derived classes
  - In Java, we would use an abstract method
  - In C++, we use a “pure virtual” function
    - Example: `virtual string Noise() = 0;`
- ❖ A class containing *any* pure virtual methods is **abstract**
  - ★ You can't create instances of an abstract class
    - Extend abstract classes and override methods to use them
- ❖ A class containing *only* pure virtual methods is the same as a Java interface
  - Pure type specification without implementations