


## CSE341: Programming Languages

### Lecture 17 Implementing Languages (Including Closures)

Brett Wortzman  
Spring 2020

#### Typical workflow

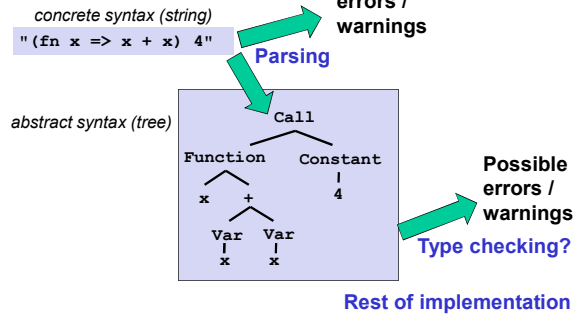

Spring 2020

CSE 341: Programming Languages

2

#### Interpreter or compiler

So "rest of implementation" takes the abstract syntax tree (AST) and "runs the program" to produce a result

Fundamentally, two approaches to implement a PL  $B$ :

- Write an **interpreter** in another language  $A$ 
  - Better names: evaluator, executor
  - Take a program in  $B$  and produce an answer (in  $B$ )
- Write a **compiler** in another language  $A$  to a third language  $C$ 
  - Better name: translator
  - Translation must *preserve meaning* (equivalence)

We call  $A$  the **metalanguage**

- Crucial to keep  $A$  and  $B$  straight

Spring 2020

CSE 341: Programming Languages

3

#### Reality more complicated

Evaluation (interpreter) and translation (compiler) are your options

- But in modern practice have both and multiple layers

A plausible example:

- Java compiler to bytecode intermediate language
- Have an interpreter for bytecode (itself in binary), but compile frequent functions to binary at run-time
- The chip is itself an interpreter for binary
  - Well, except these days the x86 has a translator in hardware to more primitive micro-operations it then executes

DrRacket uses a similar mix

Spring 2020

CSE 341: Programming Languages

4

#### Sermon

Interpreter versus compiler versus combinations is about a particular language **implementation**, not the language **definition**

So there is no such thing as a "compiled language" or an "interpreted language"

- Programs cannot "see" how the implementation works

Unfortunately, you often hear such phrases

- "C is faster because it's compiled and LISP is interpreted"
- This is nonsense; politely correct people


- (Admittedly, languages with "eval" must "ship with some implementation of the language" in each program)

Spring 2020

CSE 341: Programming Languages

5

#### Typical workflow

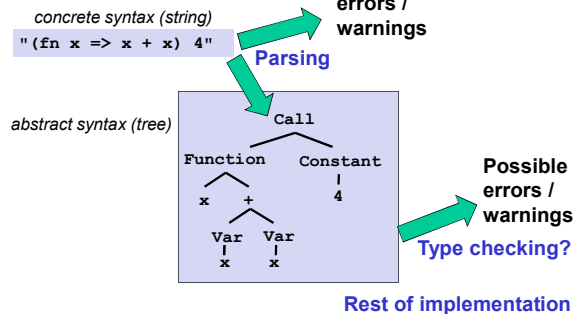


Spring 2020

CSE 341: Programming Languages

6

## Skipping parsing

- If implementing PL *B* in PL *A*, we can skip parsing by writing PL *B* programs directly as ASTs in PL *A*
  - Not so bad with ML constructors or Racket structs
  - Embeds *B* programs as trees in *A*



```
; define B's abstract syntax
(struct call ...)
(struct function ...)
(struct var ...)
...

; example B program
(call (function (list "x")
                (add (var "x")
                     (var "x")))
      (const 4))
```

Spring 2020

CSE 341: Programming Languages

7

## Already did an example!

- Let the metalanguage *A* = Racket
- Let the language-implemented *B* = "Arithmetic Language"
- Arithmetic programs written with calls to Racket constructors
- The interpreter is `eval-exp`

```
(struct const (int) #:transparent)
(struct negate (e) #:transparent)
(struct add (e1 e2) #:transparent)
(struct multiply (e1 e2) #:transparent)
```

```
(define (eval-exp e)
  (cond [(const? e) e]
        [(negate? e)
         (negate (- (const-int
                    (eval-exp (negate-e e)))))]
        [(add? e) ...]
        [(multiply? e) ...]))
```

Racket data structure is Arithmetic Language program, which `eval-exp` runs

Spring 2020

CSE 341: Programming Languages

8

## What we know

- Define (abstract) syntax of language *B* with Racket structs
  - Today: *A* = Racket; *B* = "Arithmetic Language"
  - On HW5: *A* = Racket; *B* = MUPL
- Write *B* programs directly in Racket via constructors
- Implement interpreter for *B* as a (recursive) Racket function

Now, a subtle-but-important distinction:

- Interpreter can *assume* input is a "legal AST for *B*"
  - Okay to give wrong answer or inscrutable error otherwise
- Interpreter *must check* that results are the right kind of *value*
  - Give a good error message otherwise

Spring 2020

CSE 341: Programming Languages

9

## Legal ASTs

- "Trees the interpreter must handle" are a subset of all the trees Racket allows as a dynamically typed language

```
(struct const (int) #:transparent)
(struct negate (e) #:transparent)
(struct add (e1 e2) #:transparent)
(struct multiply (e1 e2) #:transparent)
```

- Can assume "right types" for struct fields
  - `const` holds a number
  - others hold legal ASTs

- Illegal ASTs can "crash the interpreter" – *this is fine*

```
(multiply (add (const 3) "uh-oh") (const 4))
(negate -7)
```

Spring 2020

CSE 341: Programming Languages

10

## Interpreter results

- Our interpreters return expressions, but not any expressions
  - Result should always be a *value*, a kind of expression that evaluates to itself
  - If not, the interpreter has a bug
- So far, only values are from `const`, e.g., `(const 17)`
- But a larger language has more values than just numbers
  - Booleans, strings, etc.
  - Pairs of values (definition of value recursive)
  - Closures
  - ...

Spring 2020

CSE 341: Programming Languages

11

## Adding booleans

See code for language that adds booleans, number-comparison, and conditionals:

```
(struct bool (b) #:transparent)
(struct eq-num (e1 e2) #:transparent)
(struct if-then-else (e1 e2 e3) #:transparent)
```

As before, illegal ASTs can "crash" the interpreter

```
(bool 3)
(const #t)
(if-then-else (bool #t) (const 7))
```

What if the program is a legal AST, but evaluation of it tries to use the wrong kind of value?

Spring 2020

CSE 341: Programming Languages

12

## (Dynamic) Type checking

Legal ASTs **must not** cause a metalanguage error

```
(add (const 3) (bool #t))
(if-then-else (const 5) (const 7) (const 0))
```

You should detect this and give an error message *in terms of the interpreted language*, not in terms of the interpreter implementation

- Means checking a recursive result whenever a particular kind of value is needed
- No need to check if no kind of value is illegal

## Dealing with variables

- Interpreters so far have been for languages without variables
  - No let-expressions, functions-with-arguments, etc.
  - Language in homework has all these things
- This segment describes in English what to do
  - Up to you to translate this to code
- Fortunately, what you have to implement is what we have been stressing since the very, very beginning of the course

## Dealing with variables

- An environment is a mapping from variables (Racket strings) to values (as defined by the language)
  - Only ever put pairs of strings and values in the environment
- Evaluation takes place in an environment
  - Environment passed as argument to interpreter helper function
  - A variable expression looks up the variable in the environment
  - Most subexpressions use same environment as outer expression
  - A let-expression evaluates its body in a larger environment

## The Set-up

So now a recursive helper function has all the interesting stuff:

```
(define (eval-under-env e env)
  (cond ... ; case for each kind of
    ) ; expression
```

- Recursive calls must "pass down" correct environment

Then `eval-exp` just calls `eval-under-env` with same expression and the *empty environment*

On homework, environments themselves are just Racket lists containing Racket pairs of a string (the MUPL variable name, e.g., "x") and a MUPL value (e.g., (int 17))

## A grading detail

- Stylistically `eval-under-env` would be a helper function one could define locally inside `eval-exp`
- **But do not do this on your homework**
  - We have grading tests that call `eval-under-env` directly, so we need it at top-level

## The best part

- The most interesting and mind-bending part of the homework is that the language being implemented has first-class closures
  - With lexical scope of course
- Fortunately, what you have to implement is what we have been stressing since we first learned about closures...

## Higher-order functions

The "magic": How do we use the "right environment" for lexical scope when functions may return other functions, store them in data structures, etc.?

Lack of magic: The interpreter uses a closure data structure (with two parts) to keep the environment it will need to use later

```
(struct closure (env fun) #:transparent)
```

Evaluate a function expression:

- A function is *not* a value; a closure *is* a value
  - Evaluating a function returns a closure
- Create a closure out of (a) the function and (b) the current environment when the function was evaluated

Evaluate a function call:

- ...

Spring 2020

CSE 341: Programming Languages

19

## Function calls

```
(call e1 e2)
```

- Use current environment to evaluate `e1` to a closure
  - Error if result is a value that is not a closure
- Use current environment to evaluate `e2` to a value
- Evaluate closure's function's body in the closure's environment, extended to:
  - Map the function's argument-name to the argument-value
  - And for recursion, map the function's name to the whole closure

This is the same semantics we learned a few weeks ago "coded up"

Given a closure, the code part is *only* ever evaluated using the environment part (extended), *not* the environment at the call-site

Spring 2020

CSE 341: Programming Languages

20

## Is that expensive?

- *Time* to build a closure is tiny: a struct with two fields
- *Space* to store closures *might* be large if environment is large
  - But environments are immutable, so natural and correct to have lots of sharing, e.g., of list tails (cf. lecture 3)
  - Still, end up keeping around bindings that are not needed
- Alternative used in practice: When creating a closure, store a possibly-smaller environment holding only the variables that are **free variables** in the function body
  - Free variables: Variables that occur, not counting shadowed uses of the same variable name
  - A function body would never need anything else from the environment

Spring 2020

CSE 341: Programming Languages

21

## Free variables examples

```
(lambda () (+ x y z)) ; {x, y, z}
```

```
(lambda (x) (+ x y z)) ; {y, z}
```

```
(lambda (x) (if x y z)) ; {y, z}
```

```
(lambda (x) (let ([y 0]) (+ x y z))) ; {z}
```

```
(lambda (x y z) (+ x y z)) ; {}
```

```
(lambda (x) (+ y (let ([y z]) (+ y y)))) ; {y, z}
```

Spring 2020

CSE 341: Programming Languages

22

## Computing free variables

- So does the interpreter have to analyze the code body every time it creates a closure?
- No: Before evaluation begins, compute free variables of every function in program and store this information with the function
- Compared to naïve store-entire-environment approach, building a closure now takes more time but less space
  - And time proportional to number of free variables
  - And various optimizations are possible
- [Also use a much better data structure for looking up variables than a list]

Spring 2020

CSE 341: Programming Languages

23

## Optional: compiling higher-order functions

- If we are compiling to a language without closures (like assembly), cannot rely on there being a "current environment"
- So compile functions by having the translation produce "regular" functions that *all* take an *extra explicit argument* called "environment"
- And compiler replaces all uses of free variables with code that looks up the variable using the environment argument
  - Can make these fast operations with some tricks
- Running program still creates closures and every function call passes the closure's environment to the closure's code

Spring 2020

CSE 341: Programming Languages

24

## Recall...

Our approach to language implementation:

- Implementing language *B* in language *A*
- Skipping parsing by writing language *B* programs directly in terms of language *A* constructors
- An interpreter written in *A* recursively evaluates

What we know about macros:

- Extend the syntax of a language
- Use of a macro expands into language syntax before the program is run, i.e., before calling the main interpreter function

Spring 2020

CSE 341: Programming Languages

25

## Put it together

With our set-up, we can use language *A* (i.e., Racket) *functions* that produce language *B* abstract syntax as language *B* "macros"

- Language *B* programs can use the "macros" as though they are part of language *B*
- No change to the interpreter or struct definitions
- Just a programming idiom enabled by our set-up
  - Helps teach what macros are
- See code for example "macro" definitions and "macro" uses
  - "macro expansion" happens before calling `eval-exp`

Spring 2020

CSE 341: Programming Languages

26

## Hygiene issues

- Earlier we had material on hygiene issues with macros
  - (Among other things), problems with shadowing variables when using local variables to avoid evaluating expressions more than once
- The "macro" approach described here does not deal well with this

Spring 2020

CSE 341: Programming Languages

27