



# Announcements

- HW3 due on Wednesday
- HW4 to be posted soon, due on Friday, Nov. 1<sup>st</sup>

# Midterm

This coming Friday, 10/25, 9:30-10:20, in class

Topics:

- SQL
- Relational Algebra
- E/R Diagrams
- Functional Dependencies (FDs); no BCNF



longest



shorter

Closed books

Cheat sheet included on the midterm

# Recap: ER Diagrams


Entity set



Attribute




Relationship

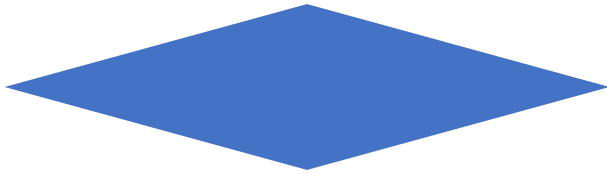

Subclass



Weak Entity

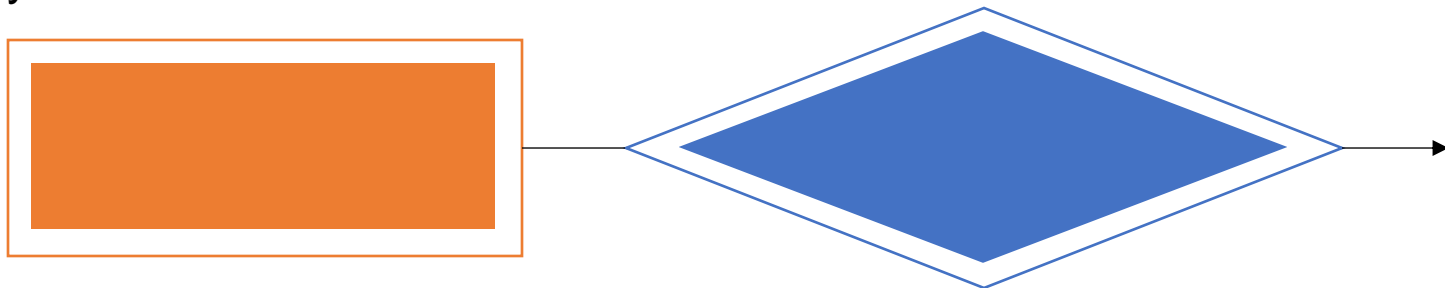

# Agenda

Today:

- Database Constraints
- Anomalies and Functional Dependencies


Next lecture:

- Schema Normalization

# Database Constraints

- A **constraint** is an assertion that must always hold on the data
- Defining constraints is part of conceptual design
- Constraints in SQL:
  - Keys and Foreign Keys
  - Attribute-level constraints
  - Tuple-level constraints
  - General assertions

# Keys and Foreign Keys

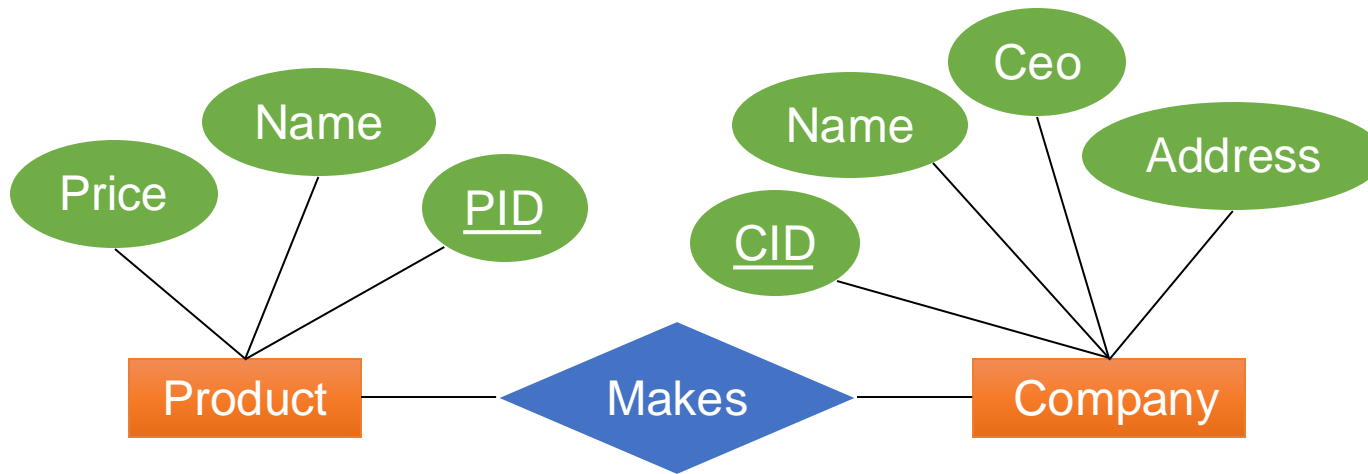


## CREATE TABLE

```
Product (  
  PID INT PRIMARY KEY,  
  name TEXT,  
  Price int);
```

## CREATE TABLE

```
Makes (  
  PID INT References Product,  
  CID INT References Company);
```

# Keys and Foreign Keys

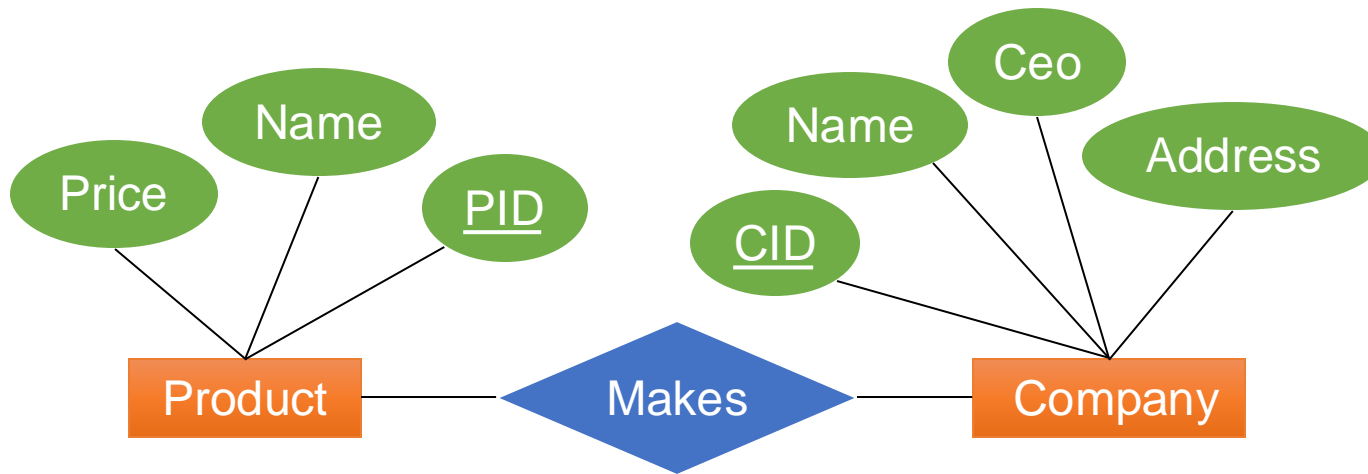

## CREATE TABLE

```
Product (  
    PID INT PRIMARY KEY,  
    name TEXT,  
    Price int);
```

## CREATE TABLE


```
Makes (  
    PID INT References Product,  
    CID INT References Company);
```

What does system  
check when...

- ...we insert a Product?
- ...we delete a Product?



# Keys and Foreign Keys

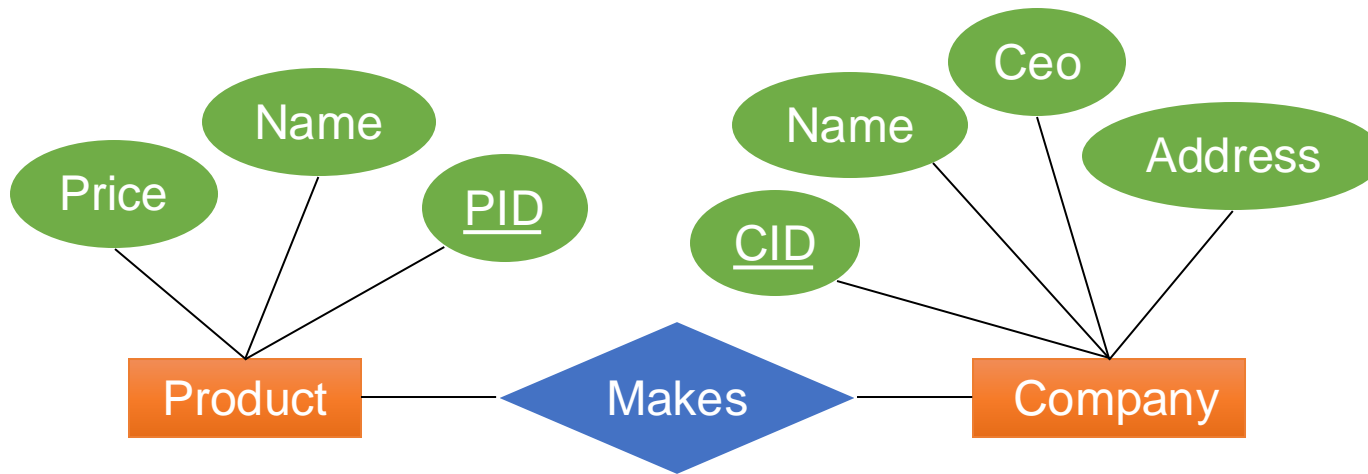

## CREATE TABLE

```
Product (  
  PID INT PRIMARY KEY,  
  name TEXT,  
  Price int);
```

## CREATE TABLE


```
Makes (  
  PID INT References Product,  
  CID INT References Company);
```

Check PID doesn't exist

What does system  
check when...

- ...we insert a Product?
- ...we delete a Product?

# Keys and Foreign Keys

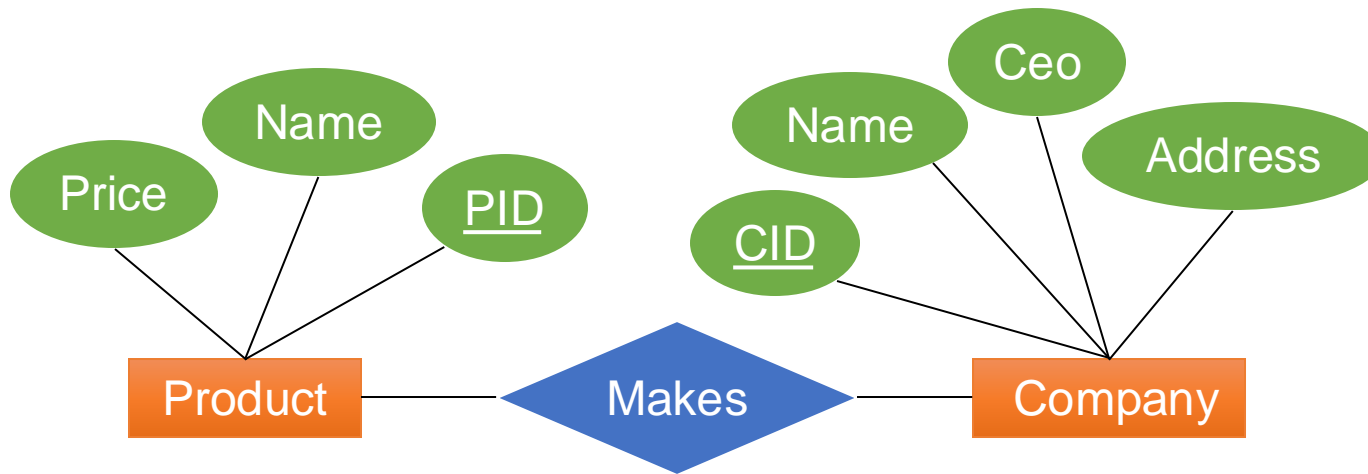

## CREATE TABLE

```
Product (  
  PID INT PRIMARY KEY,  
  name TEXT,  
  Price int);
```

## CREATE TABLE

```
Makes (  
  PID INT References Product,  
  CID INT References Company);
```


Check PID doesn't exist

What does system  
check when...

- ...we insert a Product?
- ...we delete a Product?

Check no Makes has that PID

# Keys and Foreign Keys

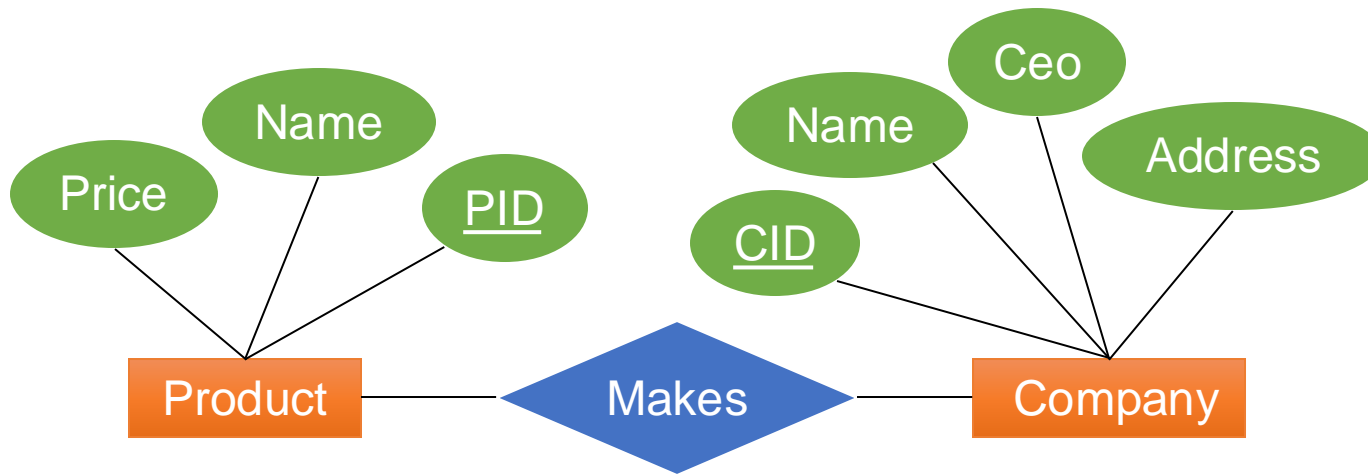

## CREATE TABLE

```
Product (  
  PID INT PRIMARY KEY,  
  name TEXT,  
  Price int);
```

## CREATE TABLE

```
Makes (  
  PID INT References Product,  
  CID INT References Company);
```


Check PID doesn't exist

What does system  
check when...

- ...we insert a Product?
- ...we delete a Product?
- ...we insert a Makes tuple?
- ...we delete a Makes tuple?

Check no Makes has that PID

# Keys and Foreign Keys

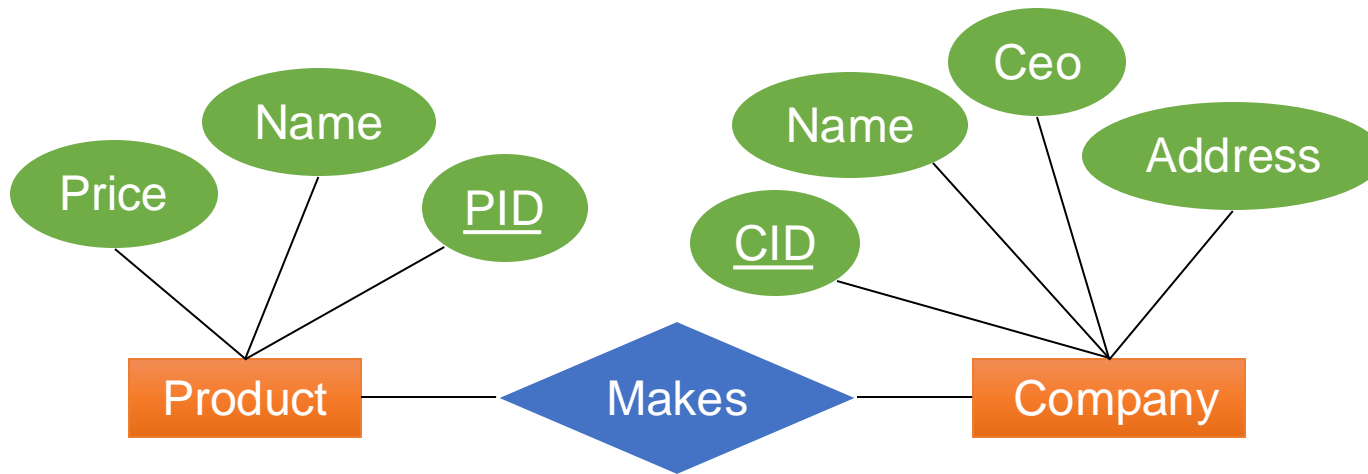

## CREATE TABLE

```
Product (  
  PID INT PRIMARY KEY,  
  name TEXT,  
  Price int);
```

## CREATE TABLE

```
Makes (  
  PID INT References Product,  
  CID INT References Company);
```

Check PID doesn't exist

Check PID,CID exist


What does system  
check when...

- ...we insert a Product?
- ...we delete a Product?

- ...we insert a Makes tuple?
- ...we delete a Makes tuple?

Check no Makes has that PID

# Keys and Foreign Keys

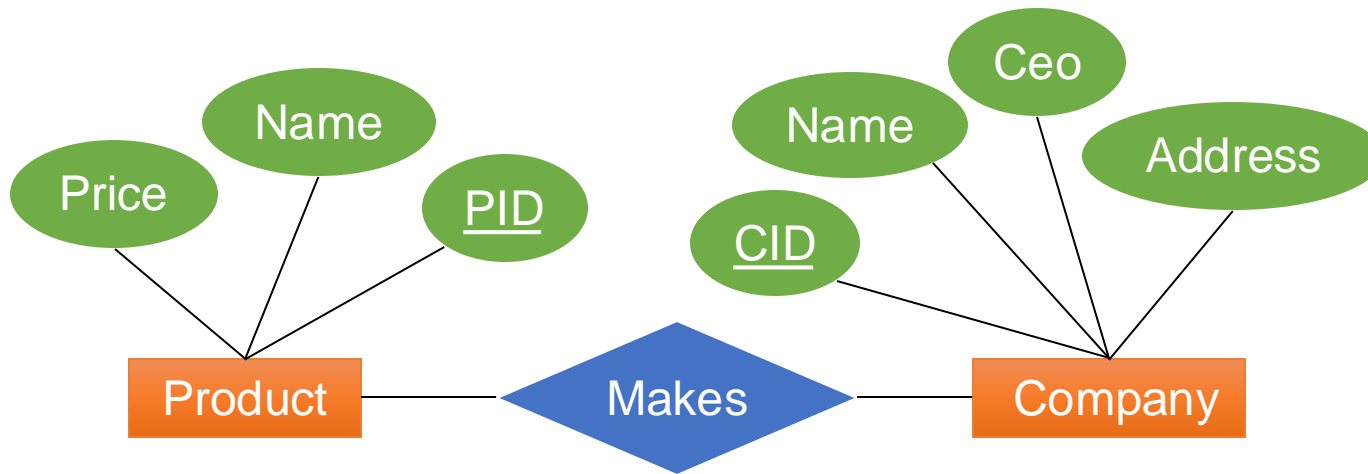

## CREATE TABLE

```
Product (  
  PID INT PRIMARY KEY,  
  name TEXT,  
  Price int);
```

## CREATE TABLE

```
Makes (  
  PID INT References Product,  
  CID INT References Company);
```

Check PID doesn't exist

Check PID,CID exist

What does system  
check when...

- ...we insert a Product?
- ...we delete a Product?

- ...we insert a Makes tuple?
- ...we delete a Makes tuple?

Check no Makes has that PID

Nothing

# Keys and Foreign Keys

```
CREATE TABLE Product (pid INT PRIMARY KEY, ...);
```



OK

```
CREATE TABLE Makes (fk_pid INT References Product, ...);
```

# Keys and Foreign Keys

```
CREATE TABLE Product (pid INT PRIMARY KEY, ...);
```



OK

```
CREATE TABLE Makes (fk_pid INT References Product, ...);
```



OK

```
CREATE TABLE Makes (fk_pid INT References Product(pid), ...);
```

# Keys and Foreign Keys

```
CREATE TABLE Product (pid INT PRIMARY KEY, ...);
```



OK

```
CREATE TABLE Makes (fk_pid INT References Product, ...);
```



OK

```
CREATE TABLE Makes (fk_pid INT References Product(pid), ...);
```



Error

```
CREATE TABLE Makes (fk_pid INT References Product(price), ...)
```



# Attribute- and Tuple-level Constraints


```
CREATE TABLE User (  
  uid INT PRIMARY KEY,  
  name TEXT,  
  age INT CHECK (age > 12 AND age < 120),  
  email TEXT,  
  phone TEXT,  
  
  CHECK (email IS NOT NULL OR phone IS NOT NULL)  
);
```

Attribute constraint

Tuple-level constraint

What happens when we insert a User?

# Global Assertions

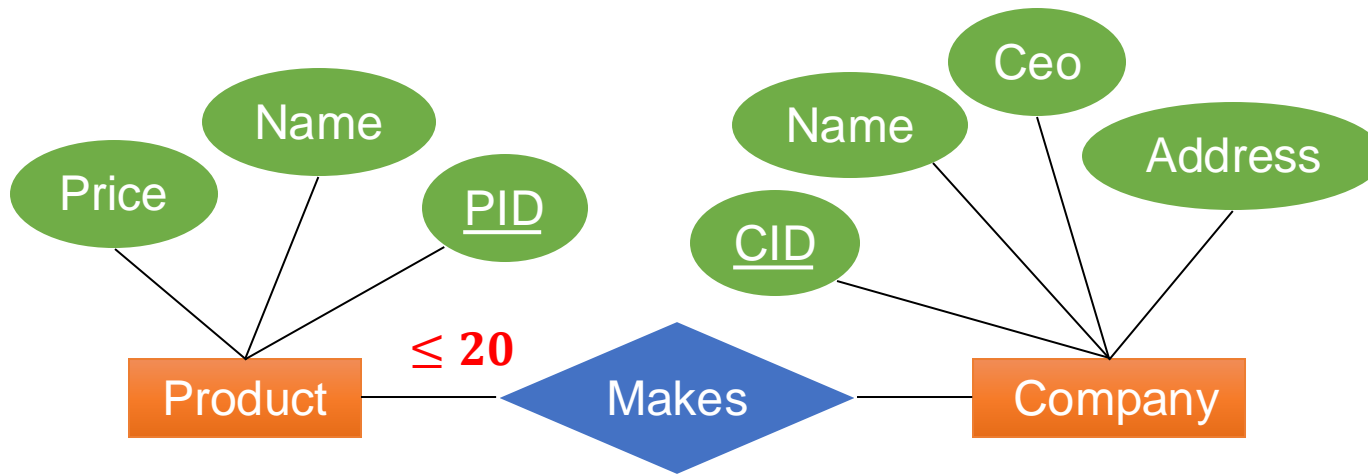

```
CREATE ASSERTION myAssert CHECK
  (NOT EXISTS (
    SELECT Makes.PID
    FROM Makes
    GROUP BY Make.PID
    HAVING COUNT(*) > 20)
  );
```

Expensive.

Very few systems support it

# Discussion


- Keys / FKs are widely used in practice
- Attribute level and tuple level constraint are sometimes checked by the application instead of having a SQL constraint
- An alternative to constraints is to use SQL Triggers: but they are complicated and hard to reason about

# Database Normalization

# The Database Design Process


Done

Conceptual Model

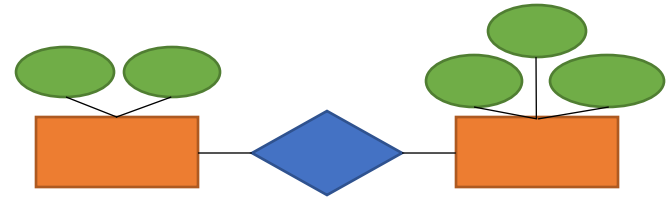

Relational Model

+ Schema  
+ Constraints

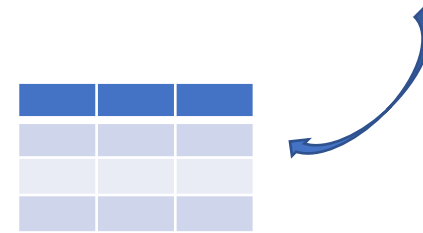

Starting today

Conceptual Schema


+ Normalization



Later...

Physical Schema

+ Partitioning  
+ Indexing

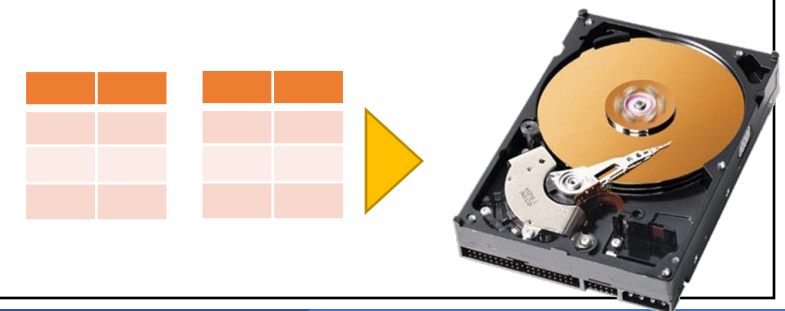

- A poorly designed table may exhibit **anomalies**
- **Database normalization:** remove them by splitting the table
- **Functional Dependencies** (FD): mathematical tool for database normalization

# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF

Notice that UID is not a key – **why?**

# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF

Notice that UID is not a key – **why?**

Anomalies:

- **Redundancy anomaly**: Fred, Seattle repeated



# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF

Notice that UID is not a key – **why?**

Anomalies:

- **Redundancy anomaly**: Fred, Seattle repeated
- **Update anomaly**: Fred to Portland needs multiple updates

# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF

Notice that UID is not a key – **why?**

Anomalies:

- **Redundancy anomaly**: Fred, Seattle repeated
- **Update anomaly**: Fred to Portland needs multiple updates
- **Deletion anomaly**: deleting Joe's phone number loses Joe

# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF



How do  
we remove  
anomalies?

# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF

How do  
we remove  
anomalies?



<u>UID</u>	Name	City
234	Fred	Seattle
987	Joe	SF

UID	Phone
234	206-555-9999
234	206-555-8888
987	415-555-7777

# Example

Simple directory of people, their phone number, and their city

UID	Name	Phone	City
234	Fred	206-555-9999	Seattle
234	Fred	206-555-8888	Seattle
987	Joe	415-555-7777	SF

How do  
we remove  
anomalies?



<u>UID</u>	Name	City
234	Fred	Seattle
987	Joe	SF

UID	Phone
234	206-555-9999
234	206-555-8888
987	415-555-7777

No more  
anomalies  
(In class)

# Discussion

- We need a systematic way to reason about, detect, and remove anomalies
- Main theoretical tool: **Functional Dependencies**

# Functional Dependencies

Fix a relation  $R(A_1, A_2, \dots, A_n)$ :

- A Functional Dependency asserts that some attributes uniquely determine other attributes



Fix a relation  $R(A_1, A_2, \dots, A_n)$ :

- A Functional Dependency asserts that some attributes uniquely determine other attributes

**Directory(UID, Name, Phone, City)**

- UID uniquely determines Name, City (not Phone)
- We write: **UID  $\rightarrow$  Name, City**  
but not **UID  $\rightarrow$  Phone**

# Definition: Informal

A functional dependency is an assertion:

$$A_1, A_2, \dots \rightarrow B_1, B_2, \dots$$

# Definition: Informal

A functional dependency is an assertion:

$$A_1, A_2, \dots \rightarrow B_1, B_2, \dots$$


It says:

If two tuples have same values for attributes  $A_1, A_2, \dots$ , then they have the same values for attributes  $B_1, B_2, \dots$

We say that  $A_1, A_2, \dots$  **determine**  $B_1, B_2, \dots$

# Definition: Informal

A functional dependency is an assertion:

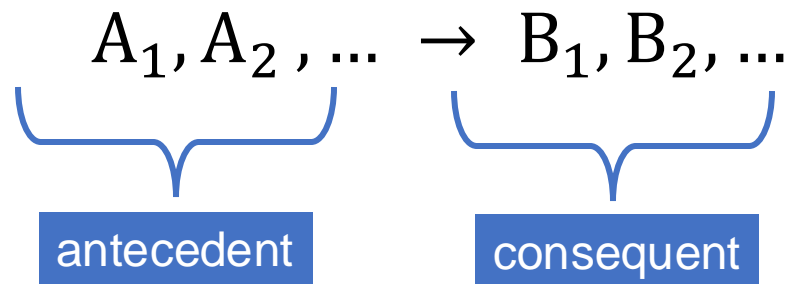

It says:

If two tuples have same values for attributes  $A_1, A_2, \dots$ , then they have the same values for attributes  $B_1, B_2, \dots$

We say that  $A_1, A_2 \dots$  **determine**  $B_1, B_2 \dots$

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

### Examples:

EID → Name, Email, Dept  
Dept → Email

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

### Examples:

EID → Name, Email, Dept  
Dept → Email

### Non-Examples:

Name → Dept  
Email → Dept

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

### Examples:

EID → Name, Email, Dept  
Dept → Email

### Non-Examples:

Name → Dept  
Email → Dept

### Maybe Examples:

Name, Email → Dept



# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

If two tuples have the same values of  $A_1A_2 \dots$ , then they have the same values of  $B_1B_2 \dots$

### Examples:

EID  $\rightarrow$  Name, Email, Dept  
Dept  $\rightarrow$  Email

### Non-Examples:

Name  $\rightarrow$  Dept  
Email  $\rightarrow$  Dept

### Maybe Examples:

Name, Email  $\rightarrow$  Dept

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

If two tuples have the same values of  $A_1A_2 \dots$ , then they have the same values of  $B_1B_2 \dots$

### Examples:

EID  $\rightarrow$  Name, Email, Dept  
Dept  $\rightarrow$  Email

### Non-Examples:

Name  $\rightarrow$  Dept  
Email  $\rightarrow$  Dept

### Maybe Examples:

Name, Email  $\rightarrow$  Dept

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

If two tuples have the same values of  $A_1A_2 \dots$ , then they have the same values of  $B_1B_2 \dots$

### Examples:

EID  $\rightarrow$  Name, Email, Dept  
Dept  $\rightarrow$  Email

### Non-Examples:

Name  $\rightarrow$  Dept  
Email  $\rightarrow$  Dept

### Maybe Examples:

Name, Email  $\rightarrow$  Dept

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer

If two tuples have the same values of  $A_1A_2 \dots$ , then they have the same values of  $B_1B_2 \dots$

Name, Email happen to have unique values

### Examples:

EID  $\rightarrow$  Name, Email, Dept  
Dept  $\rightarrow$  Email

### Non-Examples:

Name  $\rightarrow$  Dept  
Email  $\rightarrow$  Dept

### Maybe Examples:

Name, Email  $\rightarrow$  Dept

# Example

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer
0999	Alice	clr@abc.com	Clerk 2

If two tuples have the same values of  $A_1A_2 \dots$ , then they have the same values of  $B_1B_2 \dots$

Name, Email happen to have unique values

No more

### Examples:

EID  $\rightarrow$  Name, Email, Dept  
Dept  $\rightarrow$  Email

### Non-Examples:

Name  $\rightarrow$  Dept  
Email  $\rightarrow$  Dept

### Maybe Examples:

Name, Email  $\rightarrow$  Dept

# Discussion

Two ways to interpret an FD  $A \rightarrow B$ :

- Given a concrete instance  $R(A, B, \dots)$  we can **check** whether  $A \rightarrow B$  holds or not.
- We **assert** that  $A \rightarrow B$  shall hold on  $R$ , and will reject updates that violate this FD

# Example

Which of these FDs hold?

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99

# Example

Which of these FDs hold?

**Name → Color**

Category → Dept

Color, Dept → Price

yes

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99



# Example

Which of these FDs hold?

**Name → Color**  
**Category → Dept**  
Color, Dept → Price

yes

yes

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99

# Example

Which of these FDs hold?

**Name → Color**  
**Category → Dept**  
**Color, Dept → Price**

yes

yes

no

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99

# Example

Which of these FDs hold?



**Name → Color**  
**Category → Dept**  
**Color, Dept → Price**

yes

yes

no

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99
Grill	Gadget	Black	Kitchen	199

# Example

Which of these FDs hold?

**Name → Color**

yes

**Category → Dept**

no

**Color, Dept → Price**

no

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99
Grill	Gadget	Black	Kitchen	199

# Example

Which of these FDs hold?



**Name → Color**

**Category → Dept**

**Color, Dept → Price**

yes

no

no

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99
Grill	Gadget	Black	Kitchen	199
Grill	Gadget	Brown	Kitchen	199

# Example

Which of these FDs hold?

**Name → Color**  
**Category → Dept**  
**Color, Dept → Price**

no

no

no

Name	Category	Color	Dept	Price
Gizmo	Gadget	Green	Toys	49
Tweaker	Gadget	Green	Toys	99
Grill	Gadget	Black	Kitchen	199
Grill	Gadget	Brown	Kitchen	199

The more tuples we add, the fewer FDs hold

# Checking an FD in SQL

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer



Check this  
in SQL

Name → Dept


```
SELECT
```

```
    ? ? ? ? ?
```

# Checking an FD in SQL

## Employees

EID	Name	Email	Dept
0345	Alice	clr@abc.com	Clerk 1
0456	Bob	clr@abc.com	Clerk 2
0567	Alice	sales@abc.com	Sales rep
0678	Carol	sales@abc.com	Sales rep
0789	David	law@abc.com	Lawyer



Check this  
in SQL

Name → Dept

```
SELECT *  
FROM Employees E1, Employees E2  
WHERE E1.Name = E2.Name  
      and E1.Dept != E2.Dept;
```

We will improve  
this query in class



# Inference

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

Name, Category  $\rightarrow$  Price

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
...	...	...	...	...	...
...	...	...	...	...	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	?	?	?	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

**Name** → **Color**

Category → Dept

Color, Dept → Price

Then this FD is also true:

Name, Category → Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	?	?	?	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

**Name** → **Color**

Category → Dept

Color, Dept → Price

Then this FD is also true:

Name, Category → Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	c	?	?	...
...	...	...	...	...	...
...	...	...	...	...	...



# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
**Category  $\rightarrow$  Dept**  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	c	?	?	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
**Category  $\rightarrow$  Dept**  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	c	d	?	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
**Color, Dept  $\rightarrow$  Price**

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	c	d	?	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
**Color, Dept  $\rightarrow$  Price**

Then this FD is also true:

Name, Category  $\rightarrow$  Price

Proof: tuples with same Name, Category must have same Price

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	c	d	e	...
...	...	...	...	...	...
...	...	...	...	...	...

# An Interesting Observation

If all these FDs are true:

Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price

Then this FD is also true:

**Name, Category  $\rightarrow$  Price**

Proof: tuples with same Name, Category must have the same Price

Yes

Name	Category	Color	Dept	Price	...
...	...	...	...	...	...
a	b	c	d	e	...
a	b	c	d	e	...
...	...	...	...	...	...
...	...	...	...	...	...

Two ways to infer new FDs:

- Armstrong axioms
- The closure operator

# Armstrong's Axioms

# Armstrong's Axioms

Reflexivity:            if  $Y \subseteq X$  then  $X \rightarrow Y$

Augmentation:        if  $X \rightarrow Y$  then  $XZ \rightarrow YZ$

Transitivity:           if  $X \rightarrow Y$  and  $Y \rightarrow Z$  then  $X \rightarrow Z$



# Using Armstrong's Axioms

Reflexivity: if  $Y \subseteq X$  then  $X \rightarrow Y$   
Augmentation: if  $X \rightarrow Y$  then  $XZ \rightarrow YZ$   
Transitivity: if  $X \rightarrow Y$  and  $Y \rightarrow Z$  then  $X \rightarrow Z$

1. Name  $\rightarrow$  Color
2. Category  $\rightarrow$  Dept
3. Color, Dept  $\rightarrow$  Price



Name, Category  $\rightarrow$  Price

# Using Armstrong's Axioms

Reflexivity: if  $Y \subseteq X$  then  $X \rightarrow Y$   
Augmentation: if  $X \rightarrow Y$  then  $XZ \rightarrow YZ$   
Transitivity: if  $X \rightarrow Y$  and  $Y \rightarrow Z$  then  $X \rightarrow Z$

1.  $\text{Name} \rightarrow \text{Color}$
2.  $\text{Category} \rightarrow \text{Dept}$
3.  $\text{Color, Dept} \rightarrow \text{Price}$



$\text{Name, Category} \rightarrow \text{Price}$

4.  $\text{Name, Category} \rightarrow \text{Color, Category}$  (Augmentation of 1)

# Using Armstrong's Axioms

Reflexivity: if  $Y \subseteq X$  then  $X \rightarrow Y$   
Augmentation: if  $X \rightarrow Y$  then  $XZ \rightarrow YZ$   
Transitivity: if  $X \rightarrow Y$  and  $Y \rightarrow Z$  then  $X \rightarrow Z$

1.  $\text{Name} \rightarrow \text{Color}$
2.  $\text{Category} \rightarrow \text{Dept}$
3.  $\text{Color, Dept} \rightarrow \text{Price}$



$\text{Name, Category} \rightarrow \text{Price}$

4.  $\text{Name, Category} \rightarrow \text{Color, Category}$  (Augmentation of 1)
5.  $\text{Color, Category} \rightarrow \text{Color, Dept}$  (Augmentation of 2)

# Using Armstrong's Axioms

Reflexivity: if  $Y \subseteq X$  then  $X \rightarrow Y$   
Augmentation: if  $X \rightarrow Y$  then  $XZ \rightarrow YZ$   
Transitivity: if  $X \rightarrow Y$  and  $Y \rightarrow Z$  then  $X \rightarrow Z$

1.  $\text{Name} \rightarrow \text{Color}$
2.  $\text{Category} \rightarrow \text{Dept}$
3.  $\text{Color}, \text{Dept} \rightarrow \text{Price}$



$\text{Name}, \text{Category} \rightarrow \text{Price}$

4.  $\text{Name}, \text{Category} \rightarrow \text{Color}, \text{Category}$  (Augmentation of 1)
5.  $\text{Color}, \text{Category} \rightarrow \text{Color}, \text{Dept}$  (Augmentation of 2)
6.  $\text{Color}, \text{Category} \rightarrow \text{Price}$  (Transitivity 5 and 3)

# Using Armstrong's Axioms

Reflexivity: if  $Y \subseteq X$  then  $X \rightarrow Y$   
Augmentation: if  $X \rightarrow Y$  then  $XZ \rightarrow YZ$   
Transitivity: if  $X \rightarrow Y$  and  $Y \rightarrow Z$  then  $X \rightarrow Z$

1.  $\text{Name} \rightarrow \text{Color}$
2.  $\text{Category} \rightarrow \text{Dept}$
3.  $\text{Color, Dept} \rightarrow \text{Price}$



$\text{Name, Category} \rightarrow \text{Price}$

4.  $\text{Name, Category} \rightarrow \text{Color, Category}$  (Augmentation of 1)
5.  $\text{Color, Category} \rightarrow \text{Color, Dept}$  (Augmentation of 2)
6.  $\text{Color, Category} \rightarrow \text{Price}$  (Transitivity 5 and 3)
7.  $\text{Name, Category} \rightarrow \text{Price}$  (Transitivity 4 and 6)

# Discussion

- Armstrong's Axioms were introduced in the 70s, shortly after Codd's relational model
- They are widely known today
- But they are cumbersome to use for inference
- Instead, the efficient inference method uses the **closure operator**: next.

# The Closure Operator

# The Closure of a set $X$

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes  $X$  is the set of attributes  $A$  such that  $X \rightarrow A$ .



# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

$\{\text{Name, Category}\}^+ =$

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

```
{Name, Category}+ =  
  = {Name, Category,  
    }
```

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

```
{Name, Category}+ =  
= {Name, Category, Color, }
```

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

```
{Name, Category}+ =  
= {Name, Category, Color, Dept, }
```

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

```
{Name, Category}+ =  
= {Name, Category, Color, Dept, Price}
```

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

$\{\text{Name, Category}\}^+ =$   
 $= \{\text{Name, Category, Color, Dept, Price}\}$

$\{\text{Color}\}^+ =$

# The Closure of a set X

Fix a set of Functional Dependencies

The closure  $X^+$  of a set of attributes X is the set of attributes A such that  $X \rightarrow A$ .

```
Closure (X) :  
  Repeat:  
    find a FD  $Y \rightarrow A$   
    such that  $Y \subseteq X$  and  $A \notin X$   
     $X := X \cup \{A\}$   
  Until "no more change"
```

```
Name  $\rightarrow$  Color  
Category  $\rightarrow$  Dept  
Color, Dept  $\rightarrow$  Price
```

```
{Name, Category}+ =  
  = {Name, Category, Color, Dept, Price}
```

```
{Color}+ = {Color}
```



# Discussion so Far

- Goal is to detect/remove anomalies
- Anomalies are caused by unwanted FDs  
E.g.  $\text{UID} \rightarrow \text{Name, City}$ ; but UID not a key
- Next lecture: use FDs to decompose table  
**Database Normalization**