

Buffer Overflows

CSE 351 Winter 2018

Instructor:

Mark Wyse

Teaching Assistants:

Kevin Bi, Parker DeWilde, Emily Furst,

Sarah House, Waylon Huang, Vinny Palaniappan




Administrative

- ❖ Homework 3 due Friday (2/9)
- ❖ Lab 3 due next Friday (2/16)

Accessing Array Elements

- ❖ Compute start of array element as: $12 * \text{index}$
 - `sizeof(S3) = 12`, including alignment padding
- ❖ Element j is at offset 8 within structure
- ❖ Assembler gives offset $a+8$

```
struct S3 {  
    short i;  
    float v;  
    short j;  
} a[10];
```

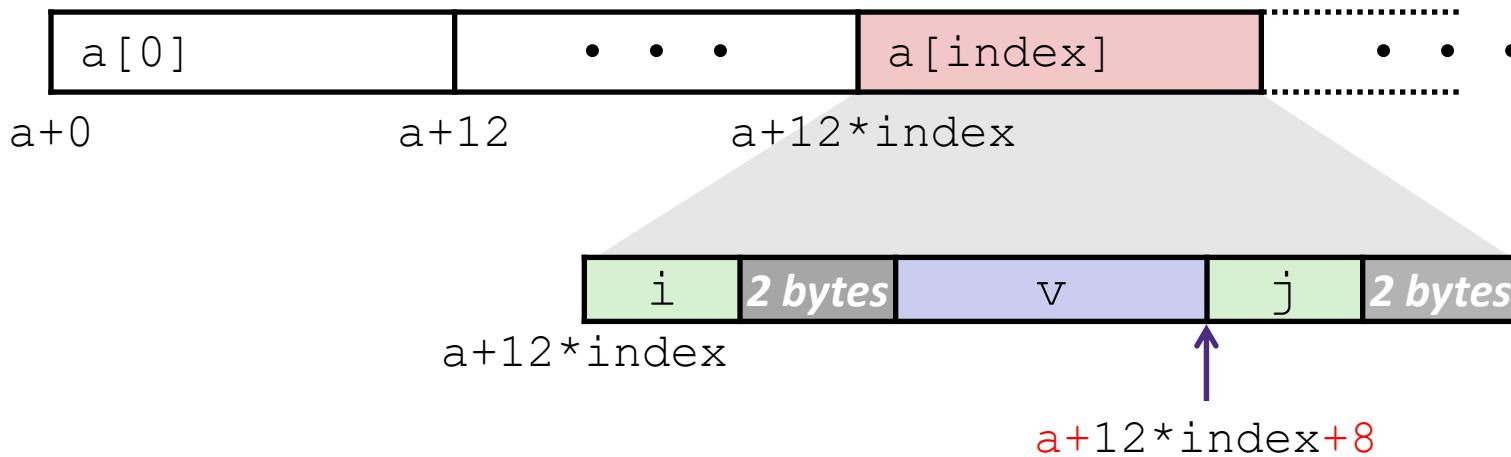

```
short get_j(int index)  
{  
    return a[index].j;  
}
```

```
# %rdi = index  
leaq (%rdi,%rdi,2),%rax # 3*index  
movzwl a+8(%rax,%eax,4),%eax
```

Peer Instruction Question

- ❖ Minimize the size of the struct by re-ordering the vars

```
struct old {  
    int i;  
  
    short s[3];  
  
    char *c;  
  
    float f;  
};
```



```
struct new {  
    int i;  
  
    _____ _____;  
    _____ _____;  
    _____ _____;  
};
```

- ❖ What are the old and new sizes of the struct?


sizeof(struct old) = _____

sizeof(struct new) = _____

- A. 16 bytes
- B. 22 bytes
- C. 28 bytes
- D. 32 bytes
- E. We're lost...

Unions

- ❖ Only allocates enough space for the **largest element** in union
- ❖ Can only use one member at a time

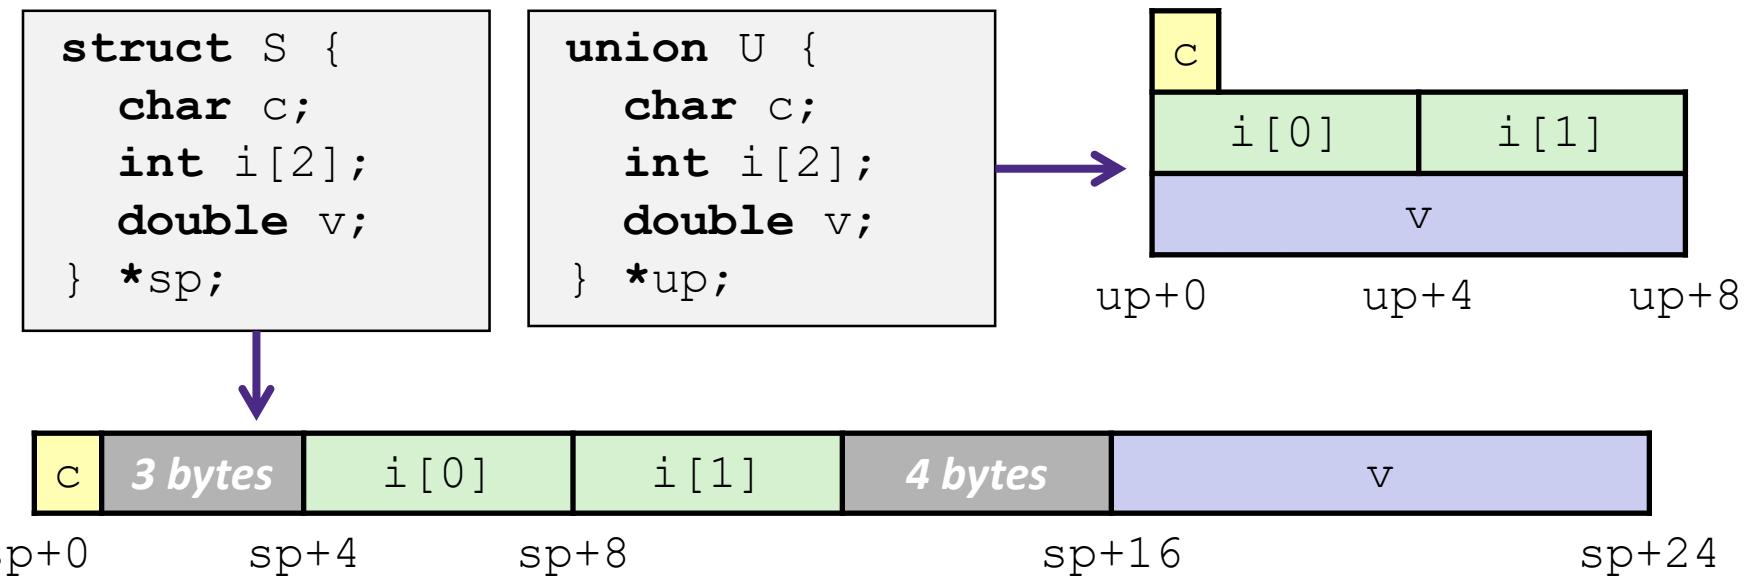

Summary

- ❖ Arrays in C
 - Aligned to satisfy every element's alignment requirement
- ❖ Structures
 - Allocate bytes in order declared
 - Pad in middle and at end to satisfy alignment
- ❖ Unions
 - Provide different views of the same memory location


Buffer Overflows

- ❖ Address space layout (more details!)
- ❖ Input buffers on the stack
- ❖ Overflowing buffers and injecting code
- ❖ Defenses against buffer overflows

not drawn to scale

Review: General Memory Layout

- ❖ Stack
 - Local variables (procedure context)
- ❖ Heap
 - Dynamically allocated as needed
 - `malloc()`, `calloc()`, `new`, ...
- ❖ Statically allocated Data
 - Read/write: global variables (Static Data)
 - Read-only: string literals (Literals)
- ❖ Code/Instructions
 - Executable machine instructions
 - Read-only

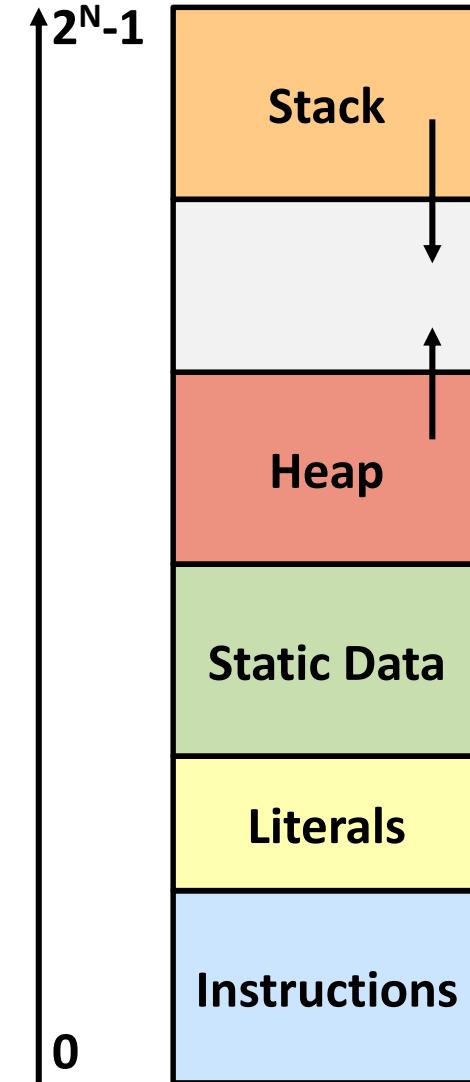

not drawn to scale

x86-64 Linux Memory Layout

❖ Stack

- Runtime stack has 8 MiB limit

❖ Heap

- Dynamically allocated as needed
- `malloc()`, `calloc()`, `new`, ...

❖ Statically allocated data (Data)

- Read-only: string literals
- Read/write: global arrays and variables

❖ Code / Shared Libraries

- Executable machine instructions
- Read-only

Hex Address




0x400000

0x000000

0x00007FFFFFFFFF

48 bits

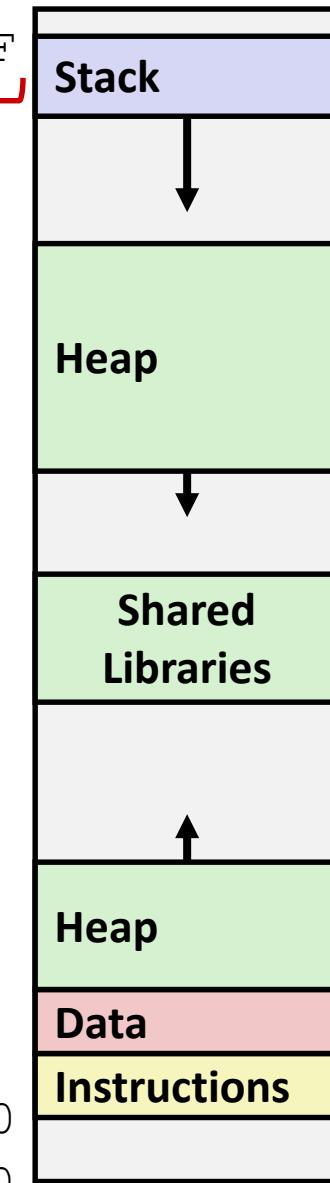

not drawn to scale


Memory Allocation Example

```
char big_array[1L<<24]; /* 16 MB */
char huge_array[1L<<31]; /* 2 GB */

int global = 0;

int useless() { return 0; }

int main()
{
    void *p1, *p2, *p3, *p4;
    int local = 0;
    p1 = malloc(1L << 28); /* 256 MB */
    p2 = malloc(1L << 8); /* 256 B */
    p3 = malloc(1L << 32); /* 4 GB */
    p4 = malloc(1L << 8); /* 256 B */
    /* Some print statements ... */
}
```

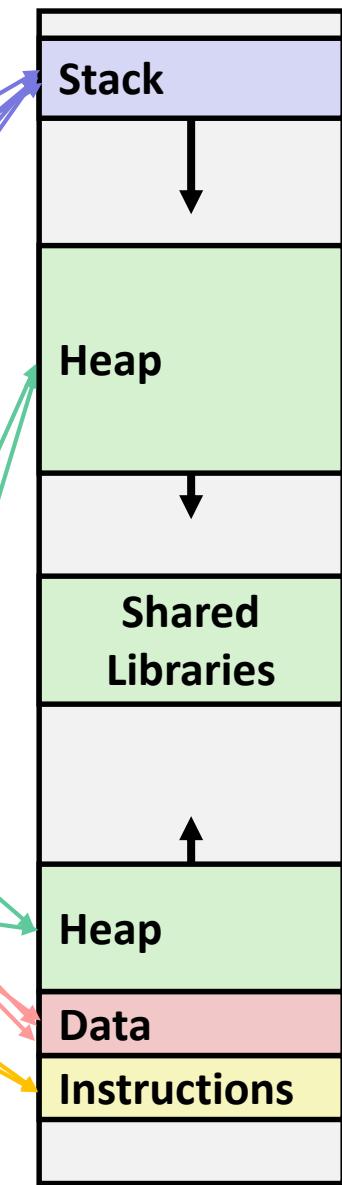

Where does everything go?


Reminder: x86-64/Linux Stack Frame

❖ Caller's Stack Frame

- Arguments (if > 6 args) for this call
- Return address
 - Pushed by `call` instruction

❖ Current/ Callee Stack Frame

- Old frame pointer (optional)
- Saved register context
(when reusing registers)
- Local variables
(if can't be kept in registers)
- “Argument build” area
(If callee needs to call another function -parameters for function about to call, if needed)

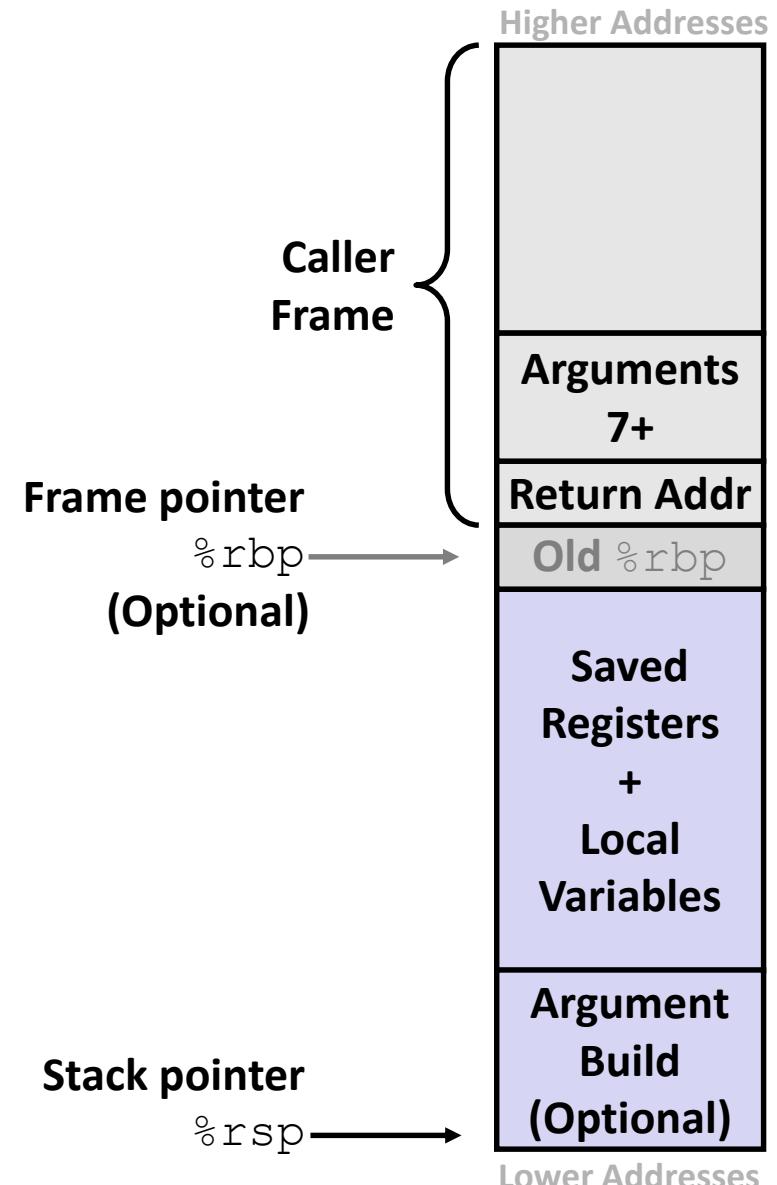

Buffer Overflow in a Nutshell

- ❖ Characteristics of the traditional Linux memory layout provide opportunities for malicious programs
 - Data and instructions both stored in the same memory
- ❖ C does not check array bounds
 - Many Unix/Linux/C functions don't check argument sizes
 - Allows overflowing (writing past the end) of buffers (arrays)

Buffer Overflow in a Nutshell

- ❖ Buffer overflows on the stack can overwrite “interesting” data
 - Attackers just choose the right inputs
- ❖ Simplest form (sometimes called “stack smashing”)
 - Unchecked length on string input into bounded array causes overwriting of stack data
 - Try to change the return address of the current procedure
- ❖ Why is this a big deal?
 - It is (was?) the #1 *technical* cause of security vulnerabilities

String Library Code

- ❖ Implementation of Unix function `gets()`

```
/* Get string from stdin */
char* gets(char* dest) {
    int c = getchar();
    char* p = dest;
    while (c != EOF && c != '\n') {
        *p++ = c;
        c = getchar();
    }
    *p = '\0';
    return dest;
}
```

pointer to start
of an array

same as:
`*p = c;`
`p++;`

- What could go wrong in this code?

String Library Code

- ❖ Implementation of Unix function `gets()`

```
/* Get string from stdin */
char* gets(char* dest) {
    int c = getchar();
    char* p = dest;
    while (c != EOF && c != '\n') {
        *p++ = c;
        c = getchar();
    }
    *p = '\0';
    return dest;
}
```

- No way to specify **limit** on number of characters to read
- ❖ Similar problems with other Unix functions:
 - `strcpy`: Copies string of arbitrary length to a dst
 - `scanf`, `fscanf`, `sscanf`, when given `%s` specifier

Vulnerable Buffer Code

```
/* Echo Line */
void echo() {           Input buffer
    char buf[8];    /* Way too small! */
    gets(buf);       Read input to buffer
    puts(buf);       Print from buffer
}
```

```
void call_echo() {
    echo();
}
```

```
unix> ./buf-nsp
Enter string: 12345678901234567890123
12345678901234567890123
```

```
unix> ./buf-nsp
Enter string: 123456789012345678901234
Segmentation Fault
```

Buffer Overflow Disassembly (buf-nsp)

echo:

```
00000000004005c6 <echo>:
```

```
4005c6: 48 83 ec 18
```

```
...
```

```
4005d9: 48 89 e7
```

```
4005dc: e8 dd fe ff ff
```

```
4005e1: 48 89 e7
```

```
4005e4: e8 95 fe ff ff
```

```
4005e9: 48 83 c4 18
```

```
4005ed: c3
```

```
sub    $0x18,%rsp
```

```
... calls printf ...
```

```
mov    %rsp,%rdi
```

```
callq 4004c0 <gets@plt>
```

```
mov    %rsp,%rdi
```

```
callq 400480 <puts@plt>
```

```
add    $0x18,%rsp
```

```
retq
```

call_echo:

```
00000000004005ee <call_echo>:
```

```
4005ee: 48 83 ec 08
```

```
4005f2: b8 00 00 00 00
```

```
4005f7: e8 ca ff ff ff
```

```
4005fc: 48 83 c4 08
```

```
400600: c3
```

```
sub    $0x8,%rsp
```

```
mov    $0x0,%eax
```

```
callq 4005c6 <echo>
```


```
add    $0x8,%rsp
```

```
retq
```

return address

Buffer Overflow Stack

Before call to gets

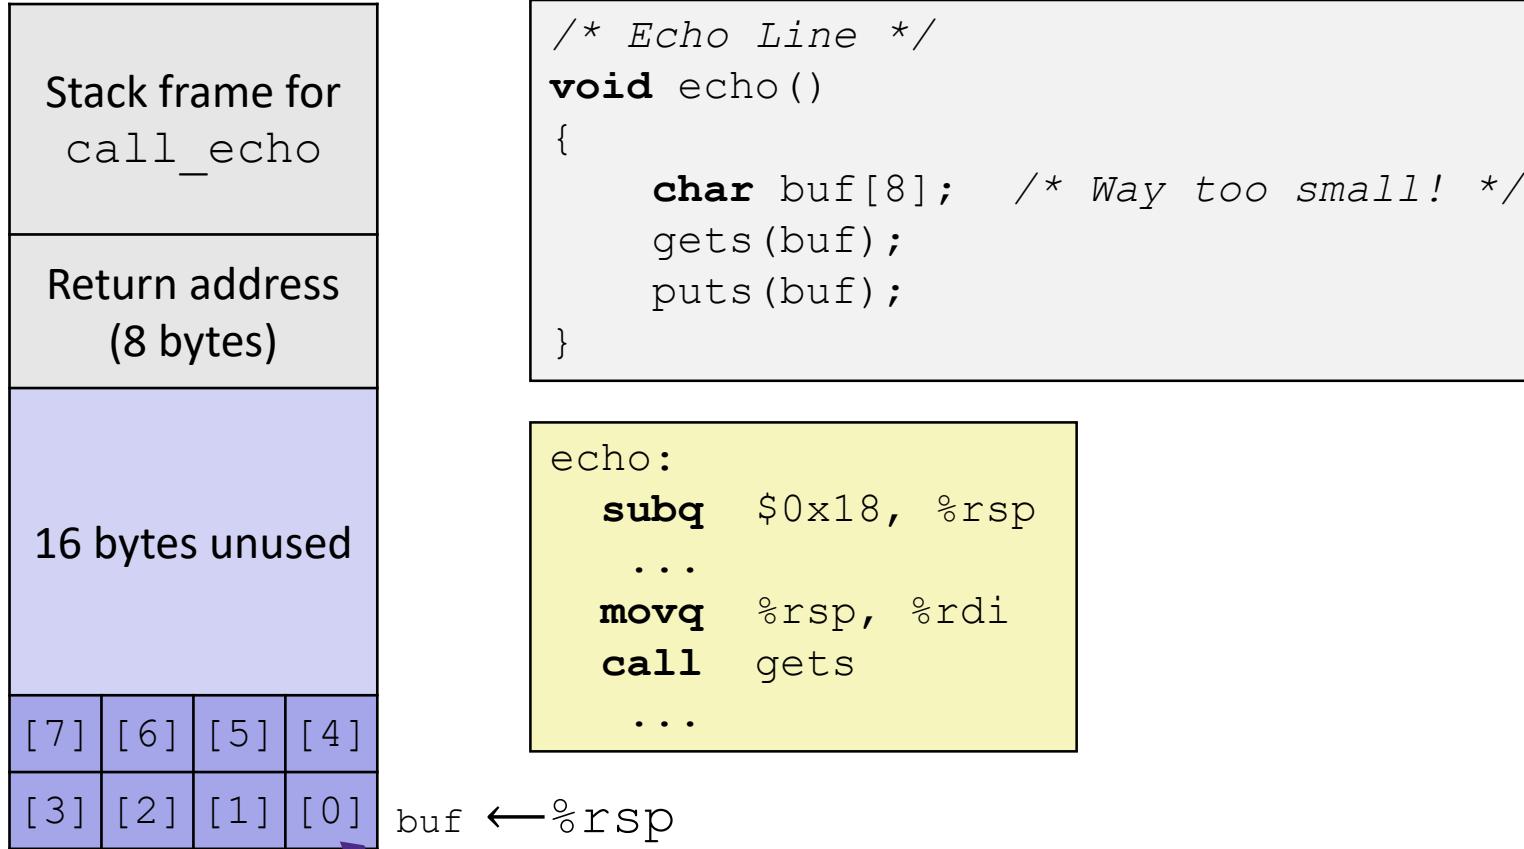

Note: addresses increasing right-to-left, bottom-to-top

Buffer Overflow Example

Before call to gets

Stack frame for call_echo			
00	00	00	00
00	40	05	fc
16 bytes unused			
[7]	[6]	[5]	[4]
[3]	[2]	[1]	[0]

```
void echo()
{
    char buf[8];
    gets(buf);
    ...
}
```

```
echo:
    subq $24, %rsp
    ...
    movq %rsp, %rdi
    call gets
    ...
```

call_echo:

```
...
4005f7: callq 4005c6 <echo>
4005fc: add    $0x8,%rsp
...
```

buf ← %rsp

Buffer Overflow Example #1

After call to gets

Stack frame for call_echo			
00	00	00	00
00	40	05	fc
00	33	32	31
30	39	38	37
36	35	34	33
32	31	30	39
38	37	36	35
34	33	32	31



Note: Digit “N” is just $0x3N$ in ASCII!

```
void echo()
{
    char buf[8];
    gets(buf);
    ...
}
```

```
echo:
    subq $24, %rsp
    ...
    movq %rsp, %rdi
    call gets
    ...
    . . .
```

call_echo:

```
. . .
4005f7: callq 4005c6 <echo>
4005fc: add    $0x8,%rsp
. . .
```

buf $\leftarrow \%$ rsp

```
unix> ./buf-nsp
Enter string: 12345678901234567890123
12345678901234567890123
```

Overflowed buffer, but did not corrupt state

Buffer Overflow Example #2

After call to gets

Stack frame for call_echo			
00	00	00	00
00	40	05	00
34	33	32	31
30	39	38	37
36	35	34	33
32	31	30	39
38	37	36	35
34	33	32	31

```
void echo()
{
    char buf[8];
    gets(buf);
    ...
}
```

```
echo:
    subq $24, %rsp
    ...
    movq %rsp, %rdi
    call gets
    ...
```

call_echo:

```
...
4005f7: callq 4005c8 <echo>
4005fc: add    $0x8,%rsp
...
```

buf ← %rsp

```
unix> ./buf-nsp
Enter string: 123456789012345678901234
Segmentation Fault
```

Overflowed buffer and corrupted return pointer

Buffer Overflow Example #2 Explained

After return from echo

Stack frame for call _echo			
00	00	00	00
00	40	05	00
34	33	32	31
30	39	38	37
36	35	34	33
32	31	30	39
38	37	36	35
34	33	32	31

← %rsp

buf

```
0000000000400500 <deregister_tm_clones>:  
400500:    mov    $0x60104f,%eax  
400505:    push   %rbp  
400506:    sub    $0x601048,%rax  
40050c:    cmp    $0xe,%rax  
400510:    mov    %rsp,%rbp  
400513:    jbe    400530  
400515:    mov    $0x0,%eax  
40051a:    test   %rax,%rax  
40051d:    je     400530  
40051f:    pop    %rbp  
400520:    mov    $0x601048,%edi  
400525:    jmpq   *%rax  
400527:    nopw   0x0(%rax,%rax,1)  
40052e:    nop  
400530:    pop    %rbp  
400531:    retq
```

“Returns” to unrelated code, but continues!

Eventually segfaults on `retq` of `deregister_tm_clones`.

Malicious Use of Buffer Overflow: Code Injection Attacks


```
void foo() {  
    bar();  
    A: ...  
}
```

return address A

```
int bar() {  
    char buf[64];  
    gets(buf);  
    ...  
    return ...;  
}
```

data written
by gets()
buf starts here → B

Stack after call to gets ()

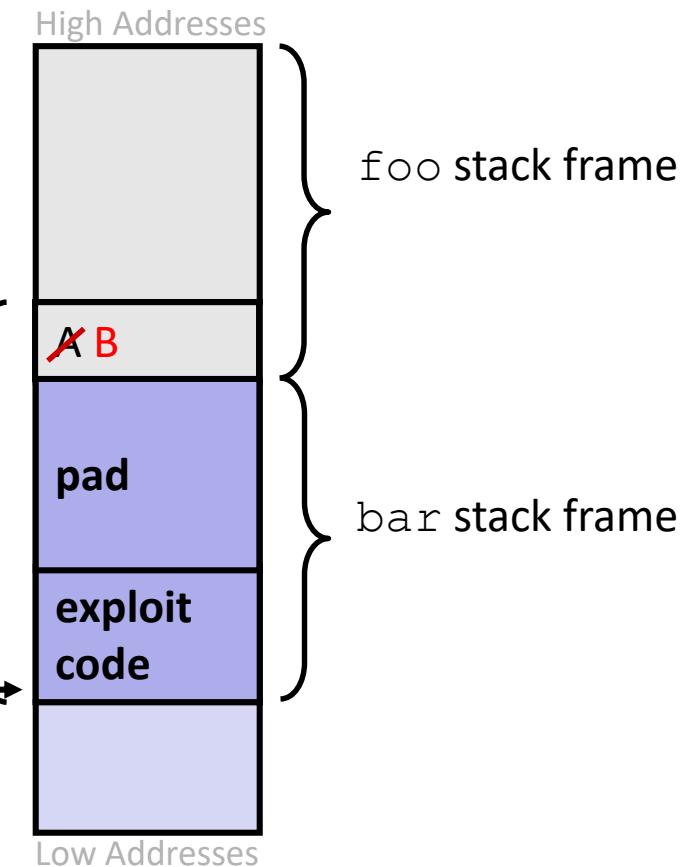

- ❖ Input string contains byte representation of executable code
- ❖ Overwrite return address A with address of buffer B
- ❖ When `bar()` executes `ret`, will jump to exploit code

Peer Instruction Question

- ❖ smash_me is vulnerable to stack smashing!
- ❖ What is the minimum number of characters that gets must read in order for us to change the return address to a stack address (in Linux)?

Previous stack frame			
00	00	00	00
00	40	05	fc
. . .			
			[0]

```
smash_me:  
  subq  $0x30, %rsp  
  ...  
  movq  %rsp, %rdi  
  call  gets  
  ...
```

- A. 33
- B. 36
- C. 51
- D. 54
- E. We're lost...

Exploits Based on Buffer Overflows


- ❖ *Buffer overflow bugs can allow remote machines to execute arbitrary code on victim machines*
- ❖ Distressingly common in real programs
 - Programmers keep making the same mistakes 😞
 - Recent measures make these attacks much more difficult
- ❖ Examples across the decades
 - Original “Internet worm” (1988)
 - *Still happens!!*
 - **Heartbleed** (2014, affected 17% of servers)
 - Cloudbleed (2017)
 - *Fun:* Nintendo hacks
 - Using glitches to rewrite code: <https://www.youtube.com/watch?v=TqK-2jUQBUY>
 - FlappyBird in Mario: <https://www.youtube.com/watch?v=hB6eY73sLV0>

Example: the original Internet worm (1988)

- ❖ Exploited a few vulnerabilities to spread
 - Early versions of the finger server (`fingerd`) used `gets()` to read the argument sent by the client:
 - `finger droh@cs.cmu.edu`
 - Worm attacked `fingerd` server with phony argument:
 - `finger "exploit-code padding new-return-addr"`
 - Exploit code: executed a root shell on the victim machine with a direct TCP connection to the attacker
- ❖ Scanned for other machines to attack
 - Invaded ~6000 computers in hours (10% of the Internet)
 - see [June 1989 article](#) in *Comm. of the ACM*
 - The young author of the worm was prosecuted...

Heartbleed (2014)

- ❖ Buffer over-read in OpenSSL
 - Open source security library
 - Bug in a small range of versions
- ❖ “Heartbeat” packet
 - Specifies length of message
 - Server echoes it back
 - Library just “trusted” this length
 - Allowed attackers to read contents of memory anywhere they wanted
- ❖ Est. 17% of Internet affected
 - “Catastrophic”
 - Github, Yahoo, Stack Overflow, Amazon AWS, ...

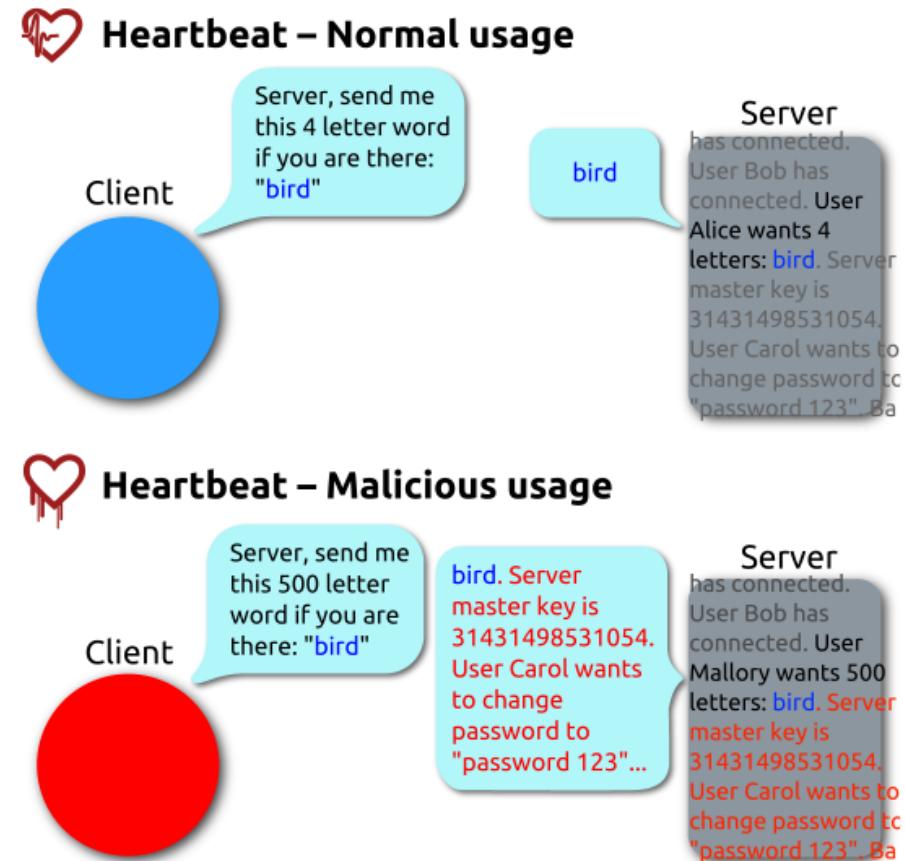

By FenixFeather - Own work, CC BY-SA 3.0,
<https://commons.wikimedia.org/w/index.php?curid=32276981>

Dealing with buffer overflow attacks

- 1) Avoid overflow vulnerabilities
- 2) Employ system-level protections
- 3) Have compiler use “stack canaries”


1) Avoid Overflow Vulnerabilities in Code

```
/* Echo Line */
void echo()
{
    char buf[8]; /* Way too small! */
    fgets(buf, 8, stdin);
    puts(buf);
}
```

- ❖ Use library routines that limit string lengths
 - fgets instead of gets (2nd argument to fgets sets limit)
 - strncpy instead of strcpy
 - Don't use scanf with %s conversion specification
 - Use fgets to read the string
 - Or use %ns where n is a suitable integer

2) System-Level Protections


- ❖ **Randomized stack offsets**
 - At start of program, allocate **random** amount of space on stack
 - Shifts stack addresses for entire program
 - Addresses will vary from one run to another
 - Makes it difficult for hacker to predict beginning of inserted code
- ❖ Example: Code from Slide 6 executed 5 times; address of variable `local` =
 - 0x7ffd19d3f8ac
 - 0x7ffe8a462c2c
 - 0x7ffe927c905c
 - 0x7ffefd5c27dc
 - 0x7ffffa0175afc
- **Stack repositioned each time program executes**

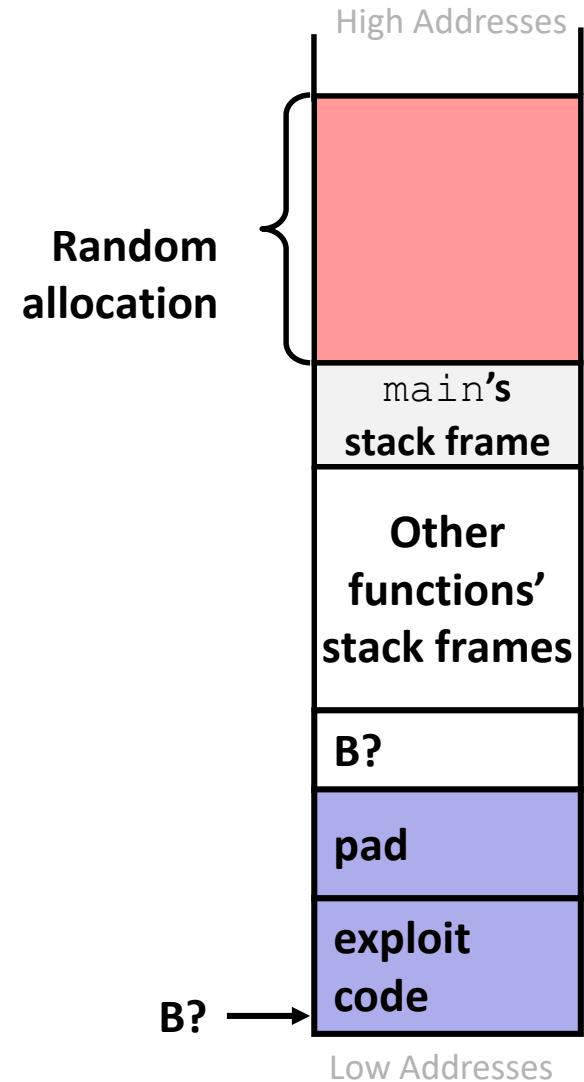

2) System-Level Protections

❖ Non-executable code segments

- In traditional x86, can mark region of memory as either “read-only” or “writeable”
 - Can execute anything readable
- x86-64 added explicit “execute” permission
- Stack marked as non-executable
 - Do *NOT* execute code in Stack, Static Data, or Heap regions
 - Hardware support needed

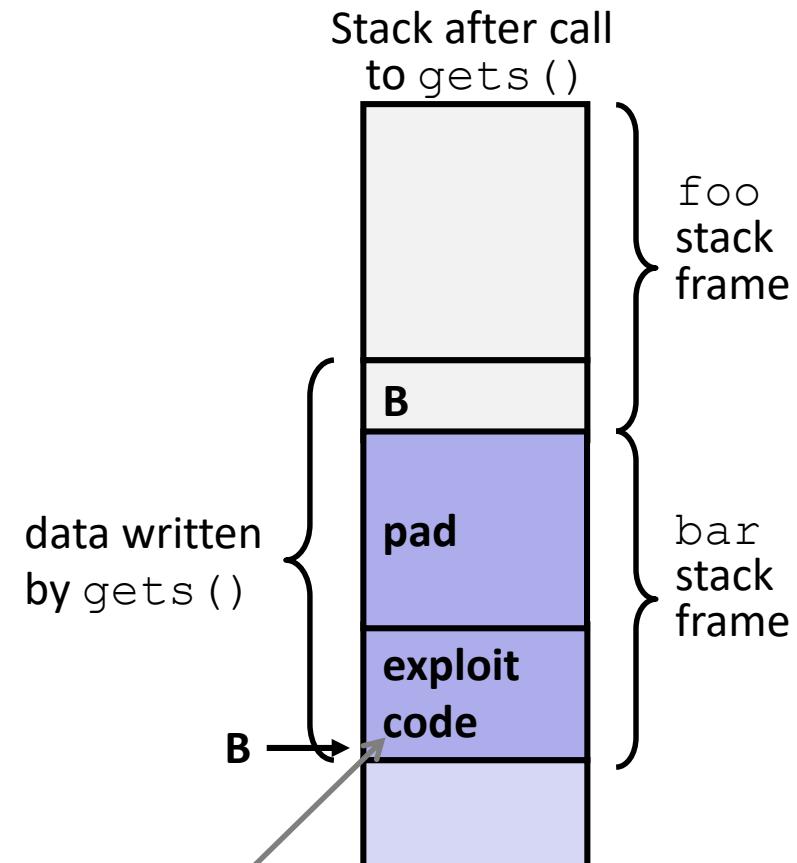

Any attempt to execute this code will fail

3) Stack Canaries

- ❖ Basic Idea: place special value (“canary”) on stack just beyond buffer
 - *Secret* value known only to compiler
 - “After” buffer but before return address
 - Check for corruption before exiting function
- ❖ GCC implementation (now default)
 - `-fstack-protector`
 - Code back on Slide 14 (`buf-nsp`) compiled with `-fno-stack-protector` flag

```
unix> ./buf
Enter string: 12345678
12345678
```

```
unix> ./buf
Enter string: 123456789
*** stack smashing detected ***
```



Protected Buffer Disassembly (buf)

echo:

```
400638: sub    $0x18,%rsp
40063c: mov    %fs:0x28,%rax
400645: mov    %rax,0x8(%rsp)
40064a: xor    %eax,%eax
...
...    ... call printf ...
400656: mov    %rsp,%rdi
400659: callq  400530 <gets@plt>
40065e: mov    %rsp,%rdi
400661: callq  4004e0 <puts@plt>
400666: mov    0x8(%rsp),%rax
40066b: xor    %fs:0x28,%rax
400674: je     40067b <echo+0x43>
400676: callq  4004f0 <__stack_chk_fail@plt>
40067b: add    $0x18,%rsp
40067f: retq
```

Setting Up Canary

Before call to gets

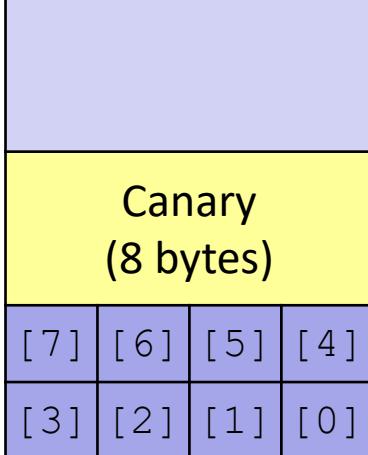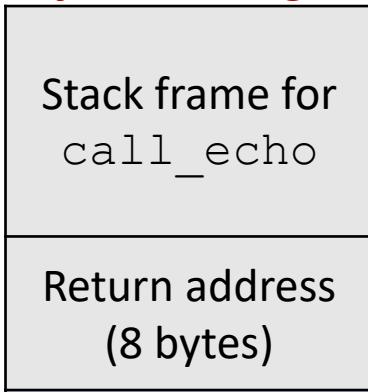

```
/* Echo Line */
void echo ()
{
    char buf[8]; /* Way too small! */
    gets(buf);
    puts(buf);
}
```

```
echo:
    . . .
    movq    %fs:40, %rax      # Get canary
    movq    %rax, 8(%rsp)    # Place on stack
    xorl    %eax, %eax      # Erase canary
    . . .
```

Segment register
(don't worry about it)

Checking Canary

After call to gets

Stack frame for call_echo			
Return address (8 bytes)			
Canary (8 bytes)			
00	37	36	35
34	33	32	31

```
/* Echo Line */
void echo ()
{
    char buf[8]; /* Way too small! */
    gets(buf);
    puts(buf);
}
```

```
echo:
    . . .
    movq    8(%rsp), %rax      # retrieve from Stack
    xorq    %fs:40, %rax      # compare to canary
    je       .L2              # if same, OK
    call    __stack_chk_fail  # else, FAIL
.L6:     . . .
```

buf ← %rsp

Input: 1234567

Summary

1) Avoid overflow vulnerabilities

- Use library routines that limit string lengths

2) Employ system-level protections

- Randomized Stack offsets
- Code on the Stack is not executable

3) Have compiler use “stack canaries”