

Java and C (part I)

CSE 351 Spring 2020

Instructor:

Ruth Anderson

Teaching Assistants:

Alex Olshanskyy

Connie Wang

Eddy (Tianyi) Zhou

Jonathan Chen

Millicent Li

Callum Walker

Diya Joy

Eric Fan

Joseph Schafer

Porter Jones


Chin Yeoh

Edan Sneh

Jeffery Tian

Melissa Birchfield

Rehaan Bhimani

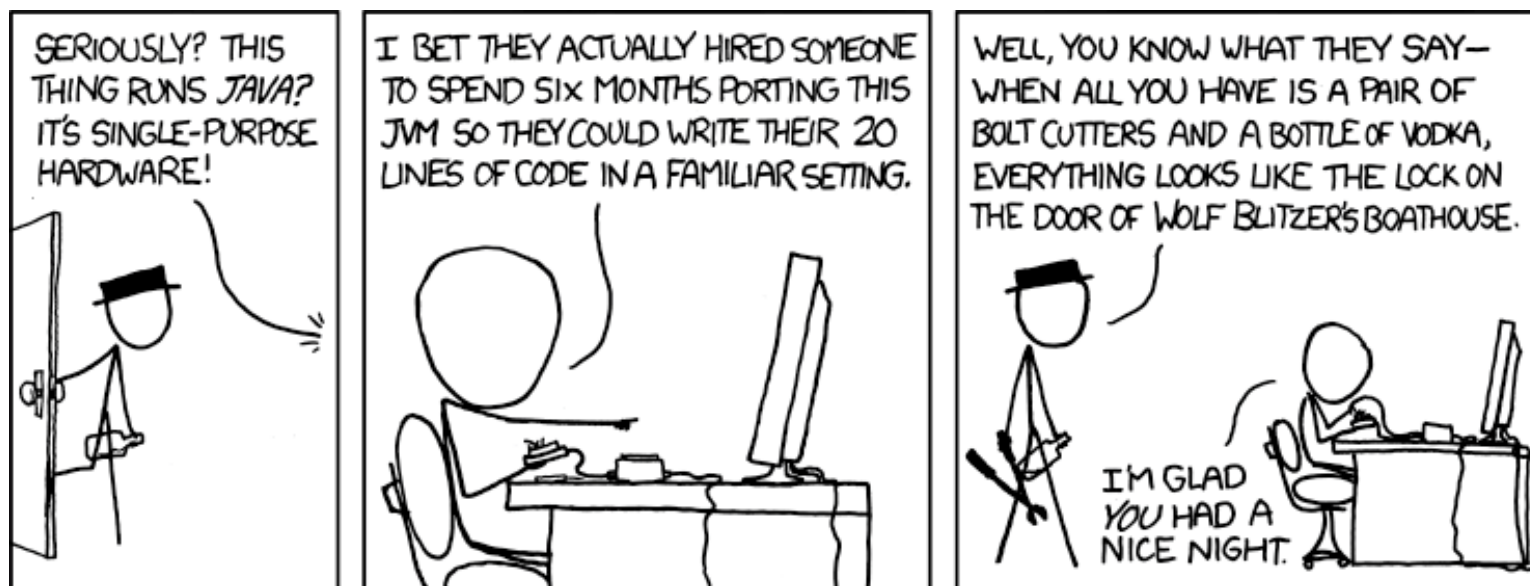

Administrivia

- ❖ Lab 5 (on Mem Alloc) due the last day of class (6/05)
 - Light style grading
 - Can be submitted at most ONE day late. (Sun 6/07)
- ❖ hw23 on Java and C due Mon (6/08)
- ❖ Unit Summary #4 – due Wed (6/10)
- ❖ Course evaluations now open
 - Please fill these out!
 - Separate ones for Lecture and Section
- ❖ **You must log on with your @uw google account to access!!**
 - **Google doc** for 11:30 Lecture: <https://tinyurl.com/351-06-01A>
 - **Google doc** for 2:30 Lecture: <https://tinyurl.com/351-06-01B>

Roadmap

C:

```
car *c = malloc(sizeof(car));
c->miles = 100;
c->gals = 17;
float mpg = get_mpg(c);
free(c);
```

Java:

```
Car c = new Car();
c.setMiles(100);
c.setGals(17);
float mpg =
    c.getMPG();
```

- Memory & data
- Integers & floats
- x86 assembly
- Procedures & stacks
- Executables
- Arrays & structs
- Memory & caches
- Processes
- Virtual memory
- Memory allocation


Assembly language:

```
get_mpg:
    pushq    %rbp
    movq    %rsp, %rbp
    ...
    popq    %rbp
    ret
```


Machine code:

```
0111010000011000
100011010000010000000010
1000100111000010
110000011111101000011111
```

Computer system:

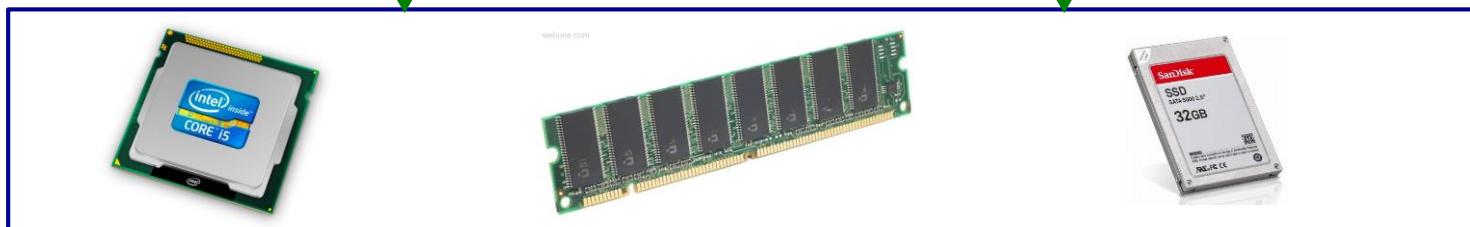

OS:

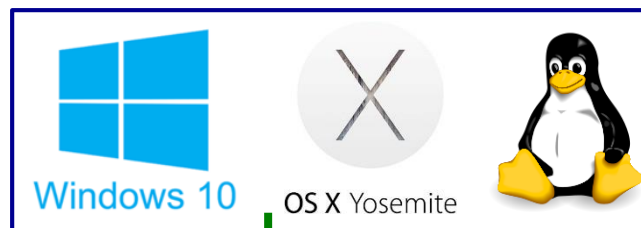

Java vs. C

Java vs. C

- ❖ Reconnecting to Java (hello CSE143!)
 - But now you know a lot more about what really happens when we execute programs
- ❖ We've learned about the following items in C; now we'll see what they look like for Java:
 - Representation of data
 - Pointers / references
 - Casting
 - Function / method calls including dynamic dispatch

Worlds Colliding

- ❖ CSE351 has given you a “really different feeling” about what computers do and how programs execute
- ❖ We have occasionally contrasted to Java, but CSE143 may still feel like “a different world”
 - It’s not – it’s just a higher-level of abstraction
 - Connect these levels via how-one-could-implement-Java in 351 terms

Meta-point to this lecture

- ❖ None of the data representations we are going to talk about are guaranteed by Java
- ❖ In fact, the language simply provides an abstraction (Java language specification)
 - Tells us how code should behave for different language constructs, but we can't easily tell how things are really represented
 - But it is important to understand an implementation of the lower levels – useful in thinking about your program

Data in Java


- ❖ Integers, floats, doubles, pointers – same as C
 - “Pointers” are called “references” in Java, but are much more constrained than C’s general pointers
 - Java’s portability-guarantee fixes the sizes of all types
 - Example: `int` is 4 bytes in Java regardless of machine
 - No unsigned types to avoid conversion pitfalls
 - Added some useful methods in Java 8 (also use bigger signed types)
- ❖ `null` is typically represented as 0 but “you can’t tell”
- ❖ Much more interesting:
 - **Arrays**
 - **Characters and strings**
 - **Objects**

Data in Java: Arrays

- ❖ Every element initialized to `0` or `null`
- ❖ Length specified in immutable field at start of array (`int` – 4 bytes)
 - `array.length` returns value of this field
- ❖ *Since it has this info, what can it do?*


C:

```
int array[5];
```



Java:

```
int[] array = new int[5];
```



Data in Java: Arrays

- ❖ Every element initialized to `0` or `null`
- ❖ Length specified in immutable field at start of array (`int` – 4 bytes)
 - `array.length` returns value of this field
- ❖ Every access triggers a bounds-check
 - Code is added to ensure the index is within bounds
 - Exception if out-of-bounds

C:

`int array[5];`

??	??	??	??	??
0	4			20

To speed up bounds-checking:

- Length field is likely in cache
- Compiler may store length field in register for loops
- Compiler may prove that some checks are redundant

Java:



`int[] array = new int[5];`

5	00	00	00	00	00
0	4			20	24

Data in Java: Characters & Strings

- ❖ Two-byte Unicode instead of ASCII
 - Represents most of the world's alphabets
- ❖ String not bounded by a ' \0 ' (null character)
 - Bounded by hidden length field at beginning of string
- ❖ All String objects read-only (vs. StringBuffer)

Example: the string "CSE351"

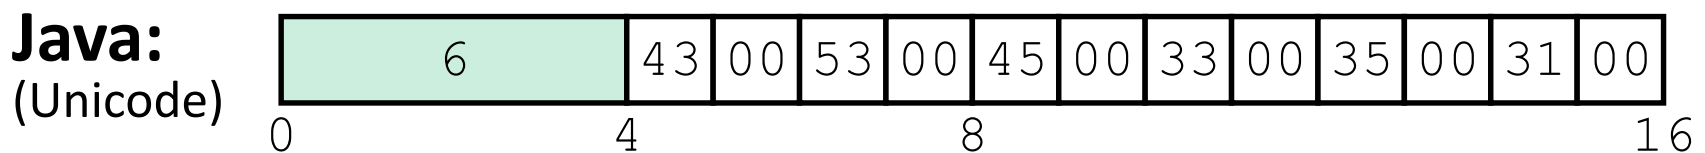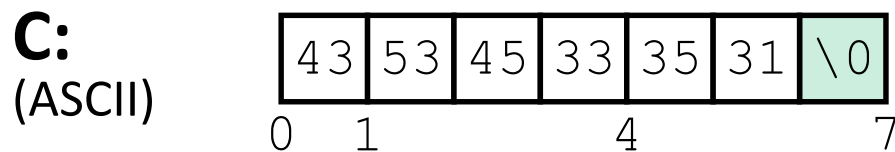

Data in Java: Objects


❖ Data structures (objects) are always stored by reference, never stored “inline”

- Include complex data types (arrays, other objects, etc.) using references

C:

```
struct rec {
    int i;
    int a[3];
    struct rec *p;
};
```


- a [] stored “inline” as part of struct

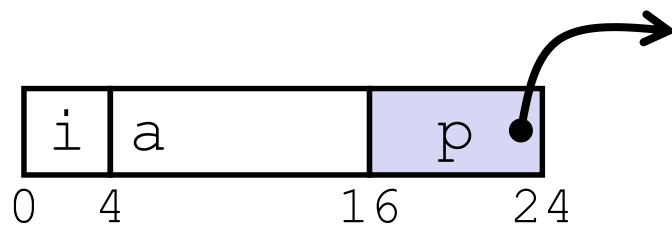

Java:

```
class Rec {
    int i;
    int[] a = new int[3];
    Rec p;
    ...
}
```

- a stored by reference in object

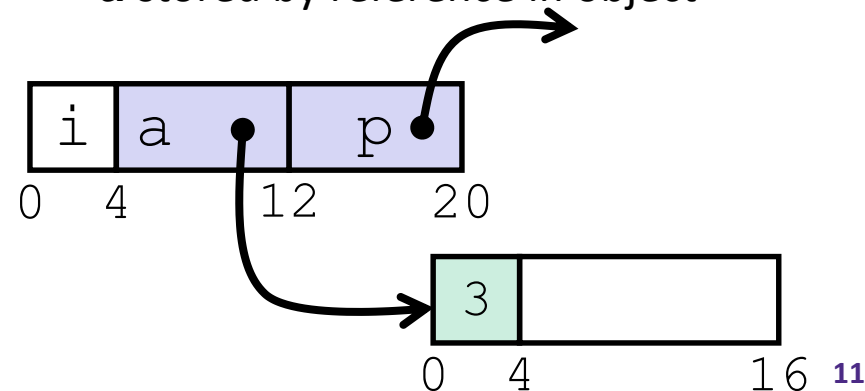

Pointer/reference fields and variables

- ❖ In C, we have “->” and “.” for field selection depending on whether we have a pointer to a struct or a struct
 - `(*r).a` is so common it becomes `r->a`
- ❖ In Java, *all non-primitive variables are references to objects*
 - We always use `r.a` notation
 - But really follow reference to `r` with offset to `a`, just like `r->a` in C
 - So no Java field needs more than 8 bytes

C:

```
struct rec *r = malloc(...);
struct rec r2;
r->i = val;
r->a[2] = val;
r->p = &r2;
```

Java:

```
r = new Rec();
r2 = new Rec();
r.i = val;
r.a[2] = val;
r.p = r2;
```


Pointers/References

- ❖ *Pointers* in C can point to any memory address
- ❖ *References* in Java can only point to [the starts of] objects
 - Can only be dereferenced to access a field or element of that object

C:

```


struct rec {
    int i;
    int a[3];
    struct rec *p;
};
struct rec* r = malloc(...);
some_fn(&(r->a[1])); // ptr
    
```

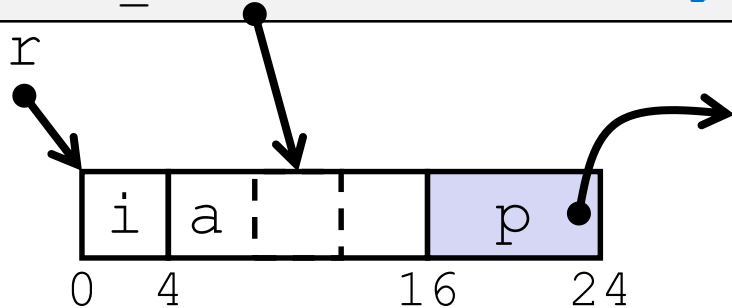

Java:

```

class Rec {
    int i;
    int[] a = new int[3];
    Rec p;
}
Rec r = new Rec();
some_fn(r.a, 1); // ref, index
    
```

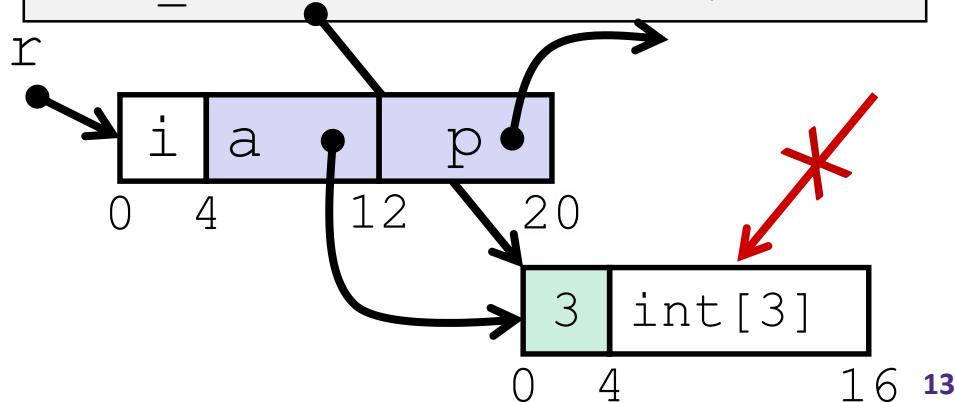


Casting in C (example from Lab 5)

- ❖ Can cast any pointer into any other pointer
 - Changes dereference and arithmetic behavior

```
struct BlockInfo {
    size_t sizeAndTags;
    struct BlockInfo* next;
    struct BlockInfo* prev;
};
typedef struct BlockInfo BlockInfo;
...
int x;
BlockInfo *b;
BlockInfo *newBlock;
...
newBlock = (BlockInfo *) ( (char *) b + x );
...
```


Cast b into char * to do unscaled addition

Cast back into BlockInfo * to use as BlockInfo struct

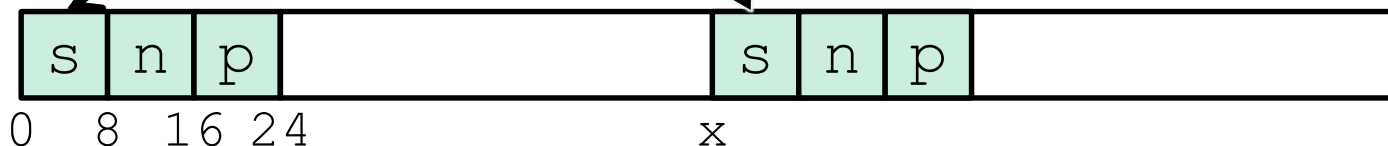

Type-safe casting in Java

- ❖ Can only cast compatible object references
 - Based on class hierarchy

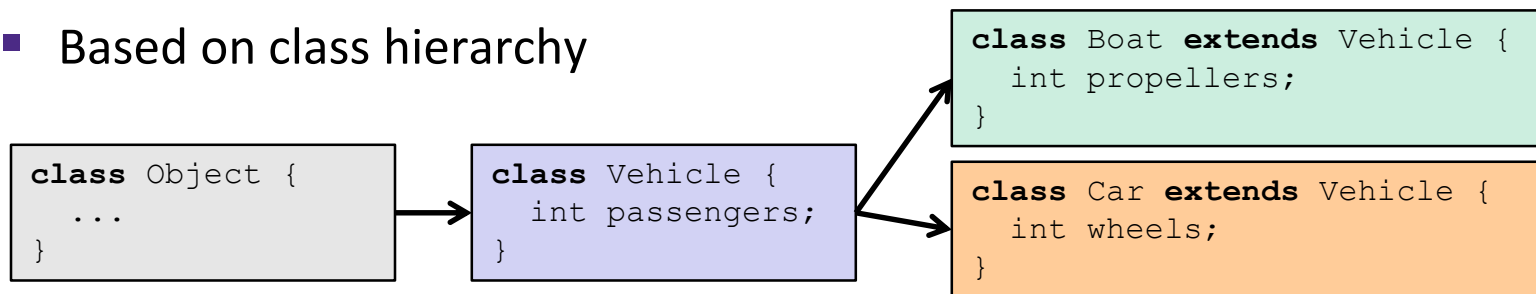

```
Vehicle v = new Vehicle(); // super class of Boat and Car
Boat    b1 = new Boat();   // |--> sibling
Car    c1 = new Car();     // |--> sibling
```

```
Vehicle v1 = new Car();
Vehicle v2 = v1;
Car    c2 = new Boat();
```

```
Car    c3 = new Vehicle();
```

```
Boat   b2 = (Boat) v;
```


```
Car    c4 = (Car) v2;
```

```
Car    c5 = (Car) b1;
```

Type-safe casting in Java

❖ Can only cast compatible object references

■ Based on class hierarchy

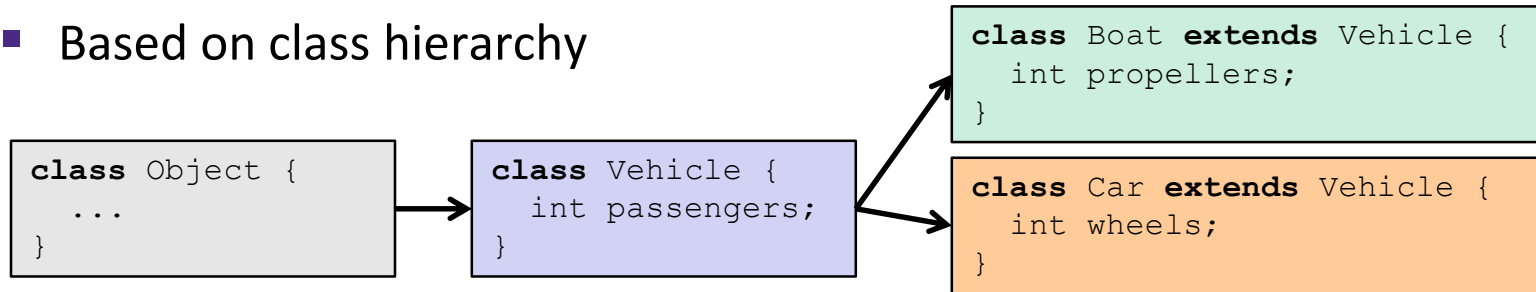

```

Vehicle v = new Vehicle(); // super class of Boat and Car
Boat    b1 = new Boat();   // |--> sibling
Car    c1 = new Car();     // |--> sibling
  
```

```

Vehicle v1 = new Car();   ← ✓ Everything needed for Vehicle also in Car
Vehicle v2 = v1;         ← ✓ v1 is declared as type Vehicle
Car    c2 = new Boat();  ← ✗ Compiler error: Incompatible type – elements in
                               Car that are not in Boat (siblings)
  
```

```

Car    c3 = new Vehicle();
  
```

```

Boat   b2 = (Boat) v;
  
```

```

Car    c4 = (Car) v2;
  
```

```

Car    c5 = (Car) b1;
  
```


Polling Question [Java I]

❖ Given:

```
Vehicle v = new Vehicle ();
```

❖ What happens with this line of code:

```
Boat b2 = (Boat) v;
```


▪ Vote at <http://pollev.com/rea>

- A. **Compiles and Runs with no errors**
- B. **Compiler error**
- C. **Compiles fine, then Run-time error**
- D. **We're lost...**

Type-safe casting in Java

❖ Can only cast compatible object references

■ Based on class hierarchy

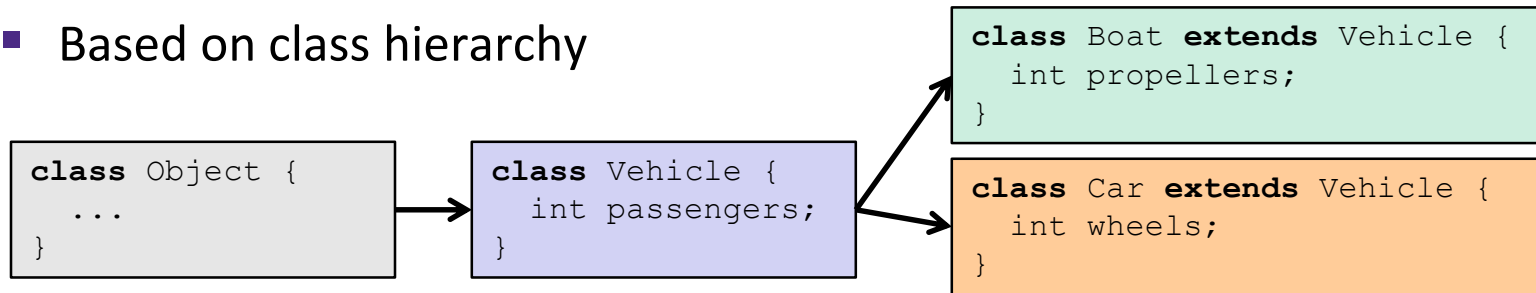

```

Vehicle v = new Vehicle(); // super class of Boat and Car
Boat    b1 = new Boat();   // |--> sibling
Car    c1 = new Car();     // |--> sibling
  
```

```

Vehicle v1 = new Car();    ← ✓ Everything needed for Vehicle also in Car
Vehicle v2 = v1;          ← ✓ v1 is declared as type Vehicle
Car    c2 = new Boat();   ← ✗ Compiler error: Incompatible type – elements in
                               Car that are not in Boat (siblings)
Car    c3 = new Vehicle(); ← ✗ Compiler error: Wrong direction – elements Car
                               not in Vehicle (wheels)
Boat   b2 = (Boat) v;    ← ✗ Runtime error: Vehicle does not contain all
                               elements in Boat (propellers)
Car    c4 = (Car) v2;    ← ✓ v2 refers to a Car at runtime
Car    c5 = (Car) b1;    ← ✗ Compiler error: Unconvertable types – b1 is
                               declared as type Boat
  
```

Java Object Definitions

```
class Point {  
    double x;  
    double y;  
  
    Point() {  
        x = 0;  
        y = 0;  
    }  
  
    boolean samePlace(Point p) {  
        return (x == p.x) && (y == p.y);  
    }  
}  
...  
Point p = new Point();  
...
```


fields

constructor

method(s)

creation

Java Objects and Method Dispatch

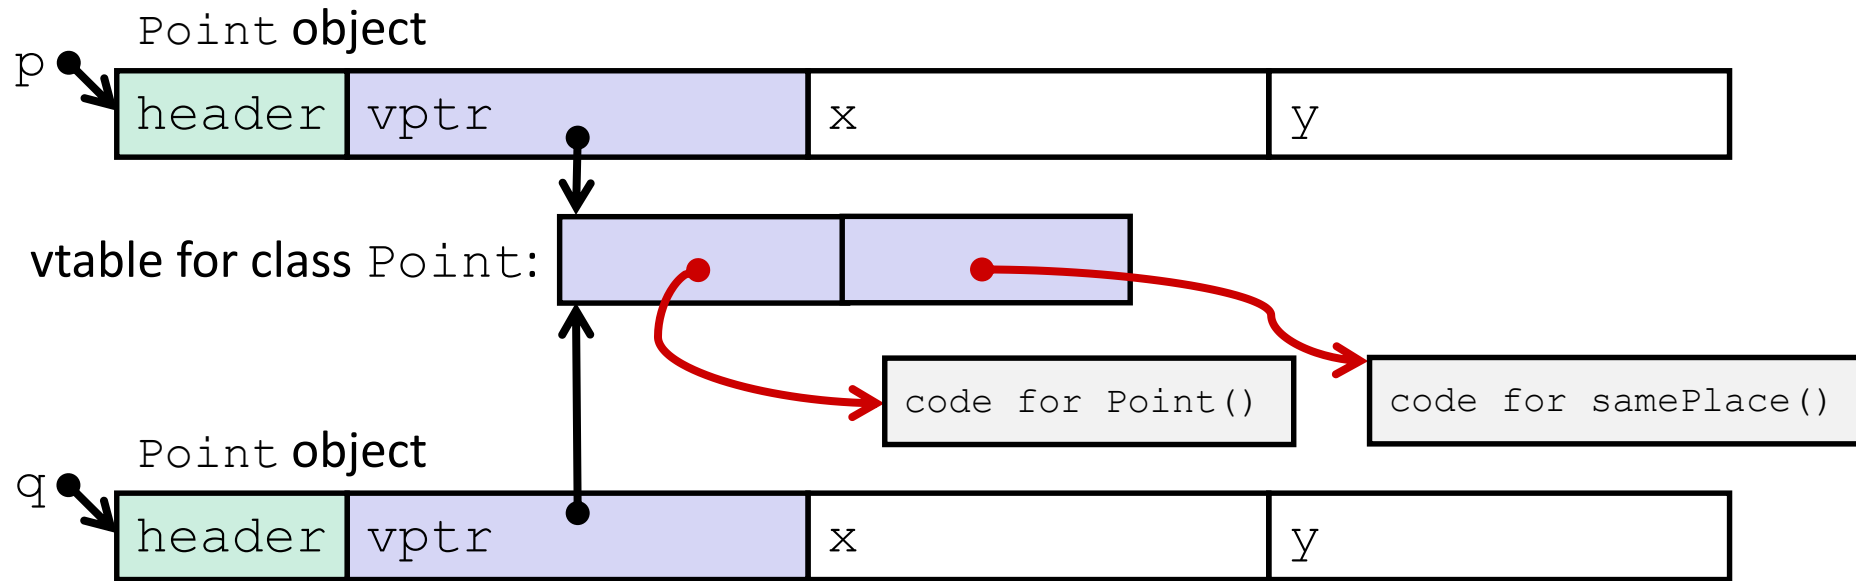

- ❖ *Virtual method table (vtable)*
 - Like a jump table for instance (“virtual”) methods plus other class info
 - One table per class
 - Each object instance contains a *virtual pointer (vptr)*
- ❖ *Object header* : GC info, hashing info, lock info, etc.
 - Why no size?

Java Constructors


- ❖ **When we call `new`:** allocate space for object (data fields and references), initialize to zero/null, and run constructor method

Java:

```
Point p = new Point();
```

C pseudo-translation:

```
Point* p = calloc(1, sizeof(Point));  
p->header = ...;  
p->vptr = &Point_vtable;  
p->vptr[0](p);
```

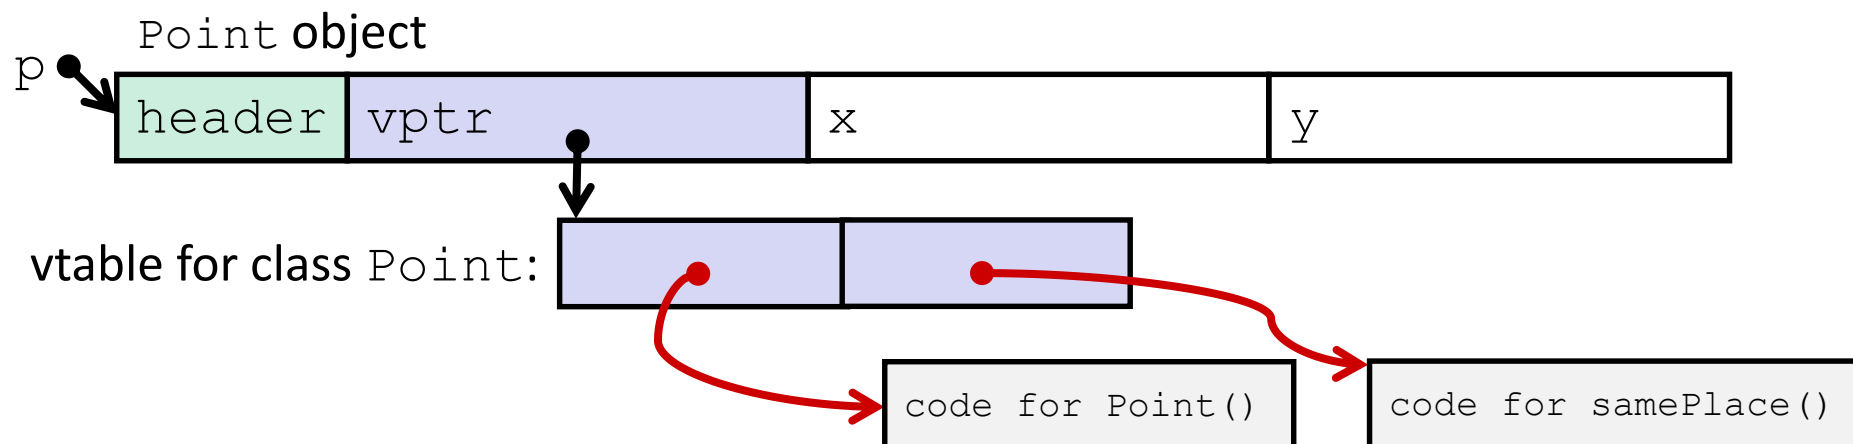

Java Methods


- ❖ Static methods are just like functions
- ❖ Instance methods:
 - Can refer to *this*;
 - Have an implicit first parameter for *this*; and
 - Can be overridden in subclasses
- ❖ The code to run when calling an instance method is chosen *at runtime* by lookup in the vtable

Java:

```
p.samePlace(q);
```

C pseudo-translation:

```
p->vptr[1](p, q);
```

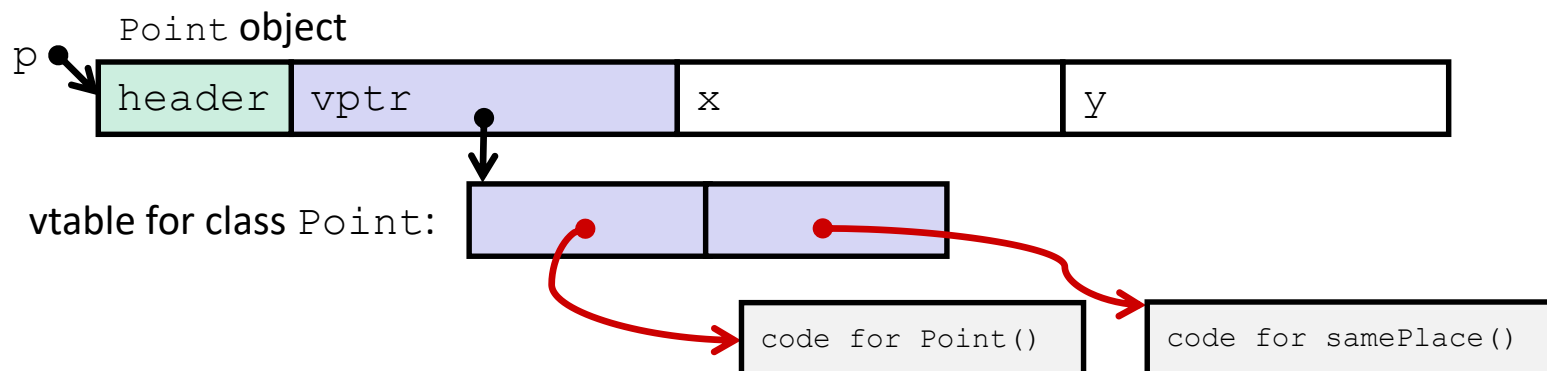

Subclassing

```
class ThreeDPoint extends Point {
    double z;
    boolean samePlace(Point p2) {
        return false;
    }
    void sayHi() {
        System.out.println("hello");
    }
}
```

- ❖ Where does “z” go? At end of fields of `Point`
 - `Point` fields are always in the same place, so `Point` code can run on `ThreeDPoint` objects without modification
- ❖ Where does pointer to code for two new methods go?
 - No constructor, so use default `Point` constructor
 - To override “`samePlace`”, use same vtable position
 - Add new pointer at end of vtable for new method “`sayHi`”

Subclassing


```

class ThreeDPoint extends Point {
    double z;
    boolean samePlace(Point p2) {
        return false;
    }
    void sayHi() {
        System.out.println("hello");
    }
}
    
```


ThreeDPoint object



vtable for ThreeDPoint:
(not Point)

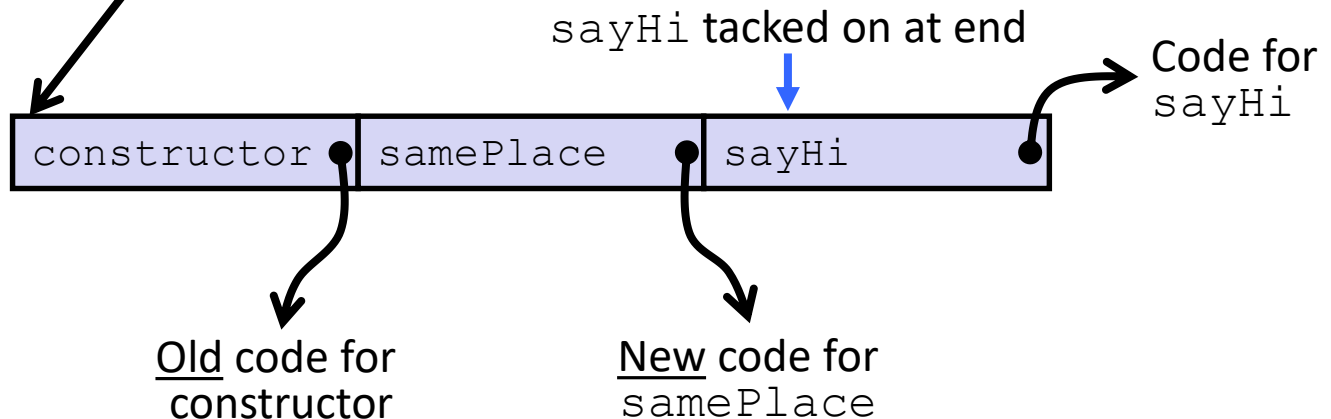

Dynamic Dispatch

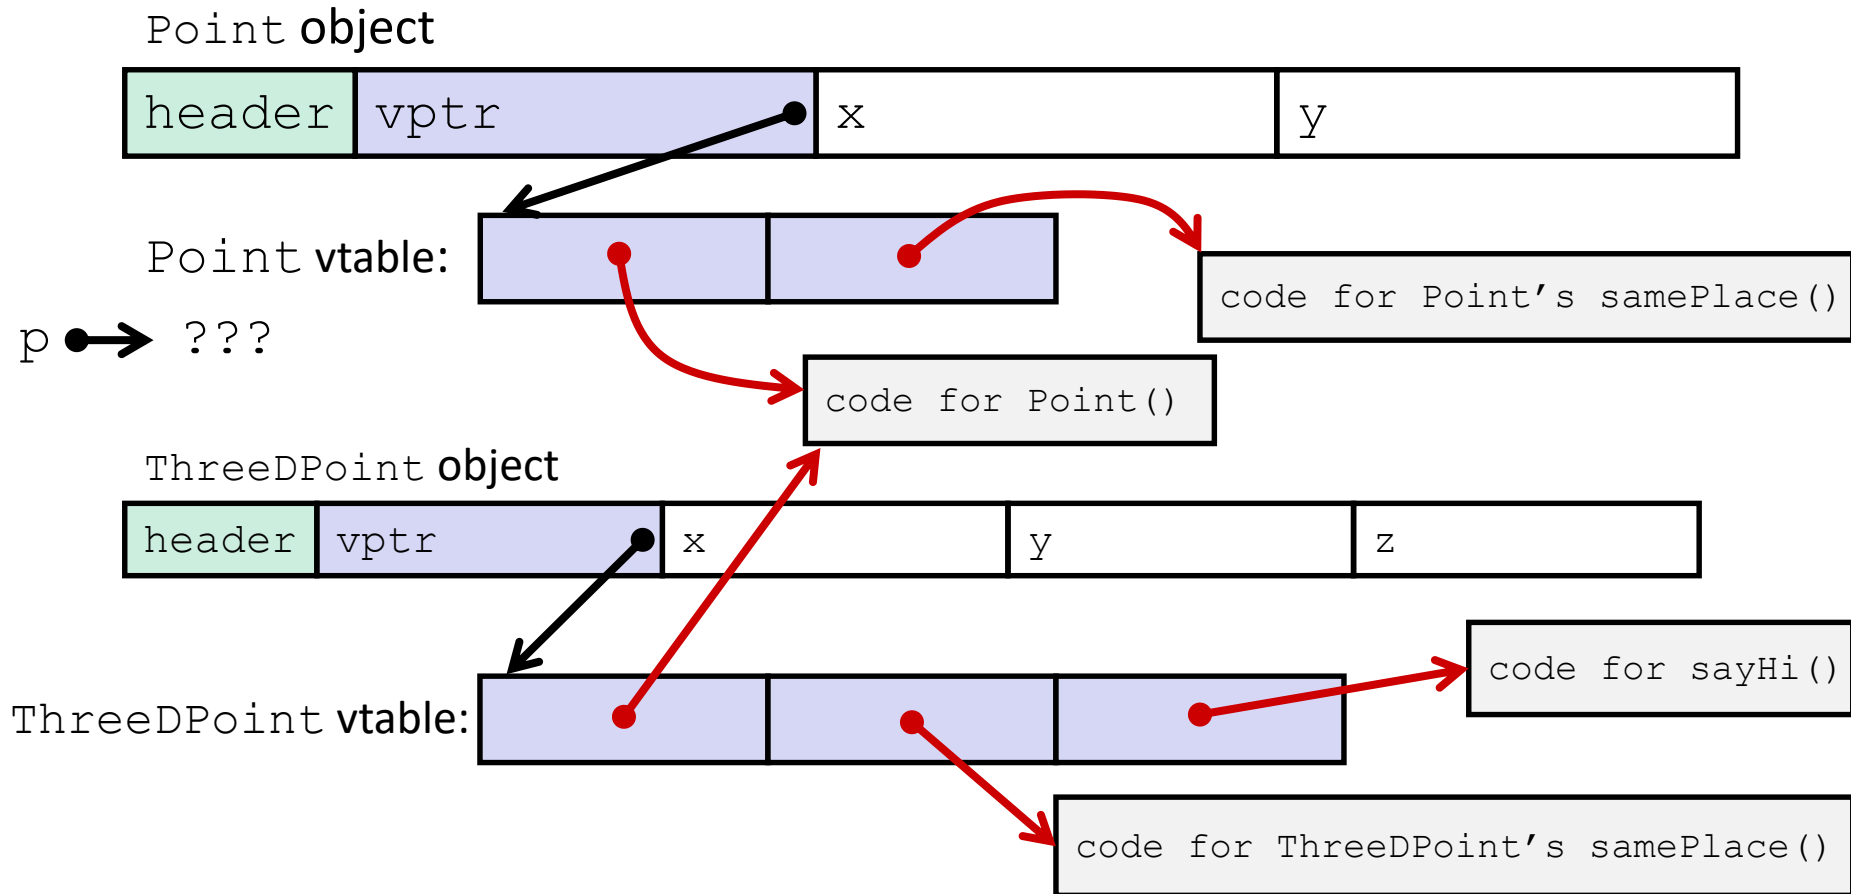

Java:

```
Point p = ???;
return p.samePlace(q);
```

C pseudo-translation:

```
// works regardless of what p is
return p->vtr[1](p, q);
```

Ta-da!

- ❖ In CSE143, it may have seemed “magic” that an *inherited* method could call an *overridden* method
 - You were tested on this endlessly

- ❖ The “trick” in the implementation is this part:

`p->vptr[i](p, q)`

- In the body of the pointed-to code, any calls to (other) methods of `this` will use `p->vptr`
- Dispatch determined by `p`, not the class that defined a method

Practice Question

- ❖ Assume: 64-bit pointers, Java objects aligned to 8 B with 8-B header
- ❖ What are the sizes of the things being pointed at by `ptr_c` and `ptr_j`?

```
struct c {  
    int i;  
    char s[3];  
    int a[3];  
    struct c *p;  
};  
struct c* ptr_c;
```

```
class jobj {  
    int i;  
    String s = "hi";  
    int[] a = new int[3];  
    jobj p;  
}  
jobj ptr_j = new jobj();
```