

Procedures II

CSE 351 Summer 2020

Instructor:

Porter Jones


Teaching Assistants:

Amy Xu

Callum Walker

Sam Wolfson

Tim Mandzyuk

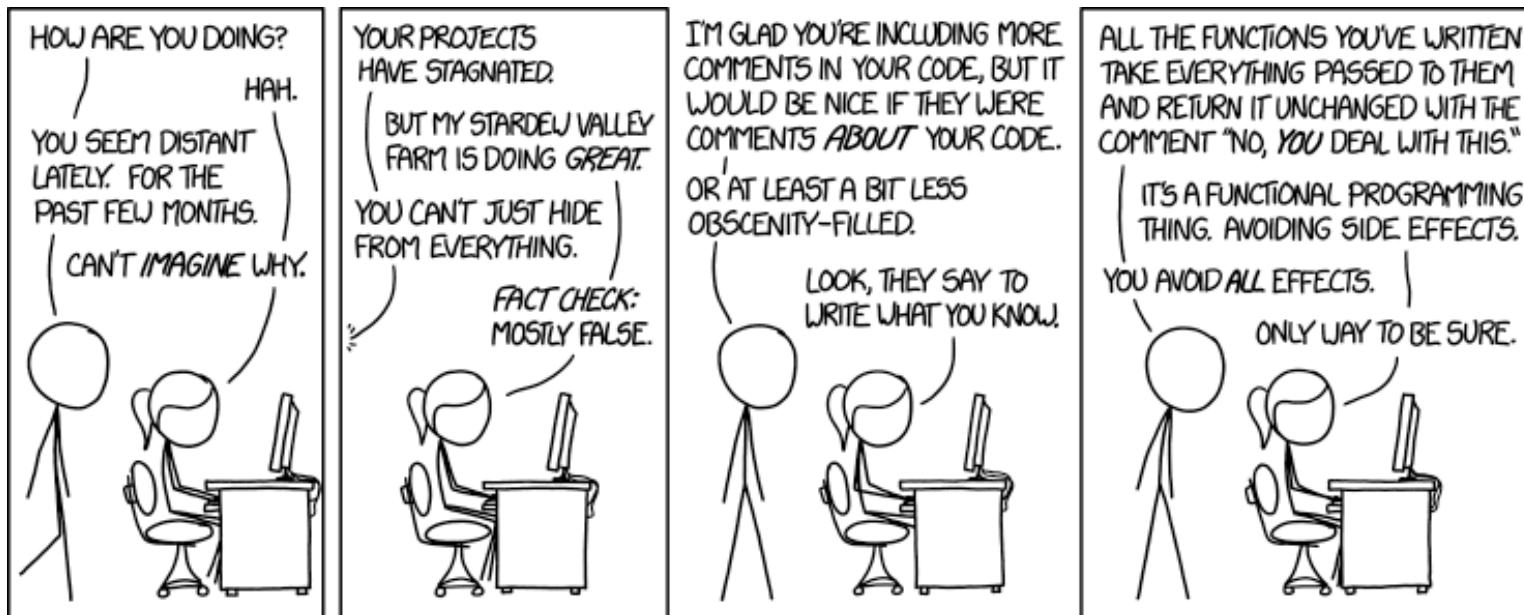

Administrivia


- ❖ Questions doc: <https://tinyurl.com/CSE351-7-17>

- ❖ Unit Summary 1 **due tonight (7/17) – 11:59pm**
 - Can still use late days until 7/20
- ❖ Mid-quarter Survey **due tonight (7/17) – 11:59pm**
 - Submit via Canvas!

- ❖ hw8, hw9, hw10, hw11 due Monday (7/20) – 10:30am
- ❖ hw12 due Wednesday (7/22)
- ❖ Lab 2 due Wednesday (7/22)
 - GDB Tutorial on Gradescope walks through first phase

11) Return from call to who

```
whoa (...)  
{  
    •  
    •  
    whο () ;  
    •  
    •  
}
```

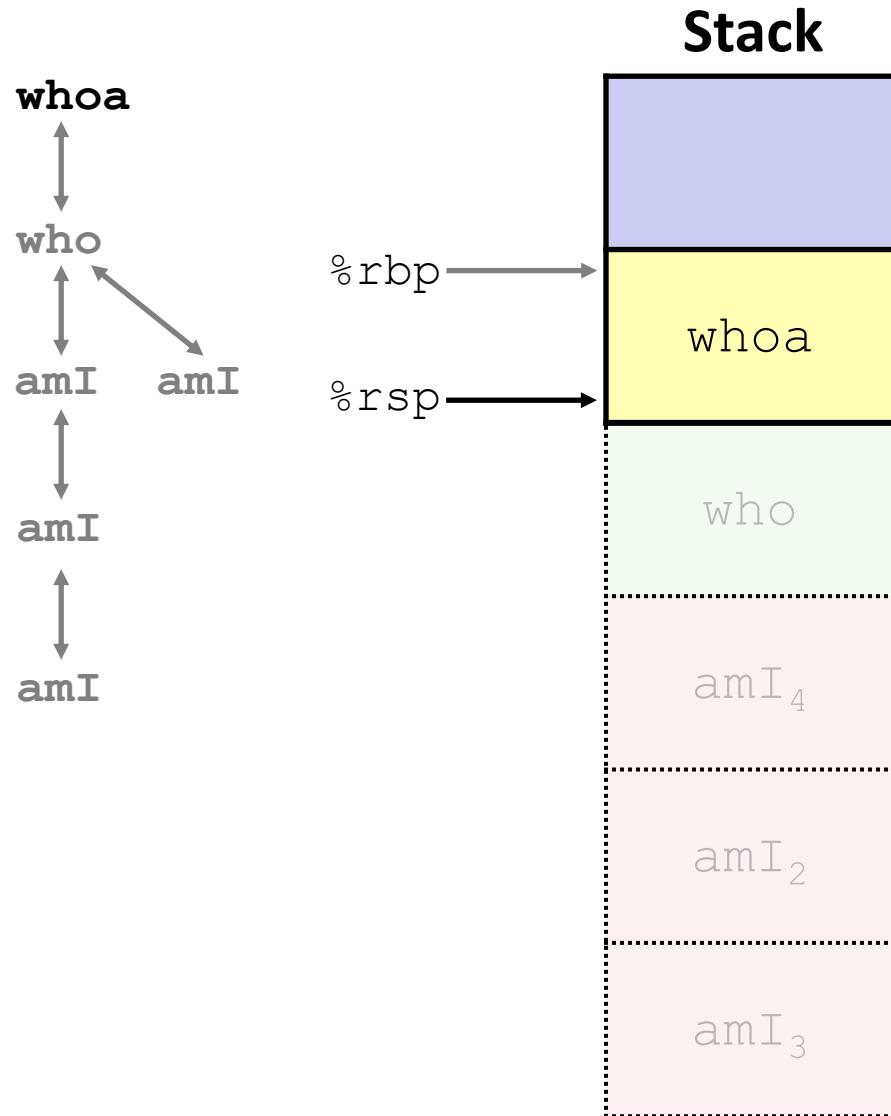

Polling Question [Proc I – a]

Vote only on 3rd question at
<http://pollev.com/pbjones>

- ❖ Answer the following questions about when `main()` is run (assume `x` and `y` stored on the Stack):

```
int main() {  
    int i, x = 0;  
    for(i = 0; i < 3; i++)  
        x = randSum(x);  
    printf("x = %d\n", x);  
    return 0;  
}
```


```
int randSum(int n) {  
    int y = rand() % 20;  
    return n + y;  
}
```

- *Higher/larger address:* `x` or `y`?
- How many total stack frames are *created*?
- What is the maximum *depth* (# of frames) of the Stack?

A. 1 B. 2 C. 3 D. 4

x86-64/Linux Stack Frame

- ❖ Caller's Stack Frame
 - Extra arguments (if > 6 args) for this call
- ❖ Current/Callee Stack Frame
 - Return address
 - Pushed by `call` instruction
 - Old frame pointer (optional)
 - Saved register context
(when reusing registers)
 - Local variables
(If can't be kept in registers)
 - "Argument build" area
(If callee needs to call another function -
parameters for function about to call, if
needed)

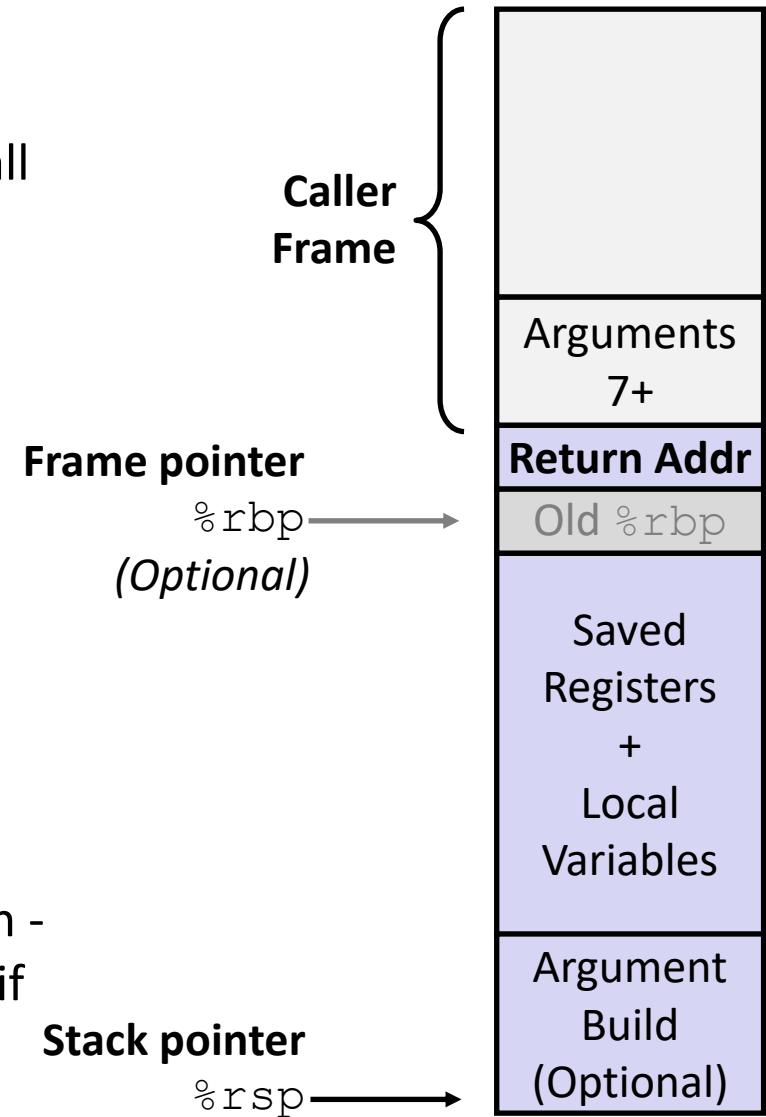

Example: increment

```
long increment(long *p, long val) {  
    long x = *p;  
    long y = x + val;  
    *p = y;  
    return x;  
}
```

increment:

```
movq    (%rdi), %rax  
addq    %rax, %rsi  
movq    %rsi, (%rdi)  
ret
```


Register	Use(s)
%rdi	1 st arg (p)
%rsi	2 nd arg (val), y
%rax	x, return value

Procedure Call Example (initial state)

```
long call_incr() {  
    long v1 = 351;  
    long v2 = increment(&v1, 100);  
    return v1 + v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $351, 8(%rsp)  
    movl    $100, %esi  
    leaq    8(%rsp), %rdi  
    call    increment  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Initial Stack Structure

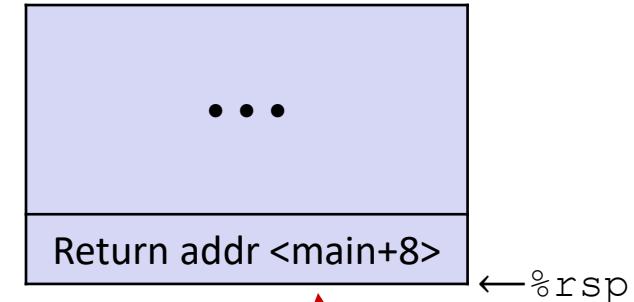

- ❖ Return address on stack is the address of instruction immediately *following* the call to “call_incr”
 - Shown here as main, but could be anything)
 - Pushed onto stack by call call_incr


Procedure Call Example (step 1)

```
long call_incr() {  
    long v1 = 351;  
    long v2 = increment(&v1, 100);  
    return v1 + v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $351, 8(%rsp)  
    movl    $100, %esi  
    leaq    8(%rsp), %rdi  
    call    increment  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

} **Allocate space
for local vars**

Stack Structure

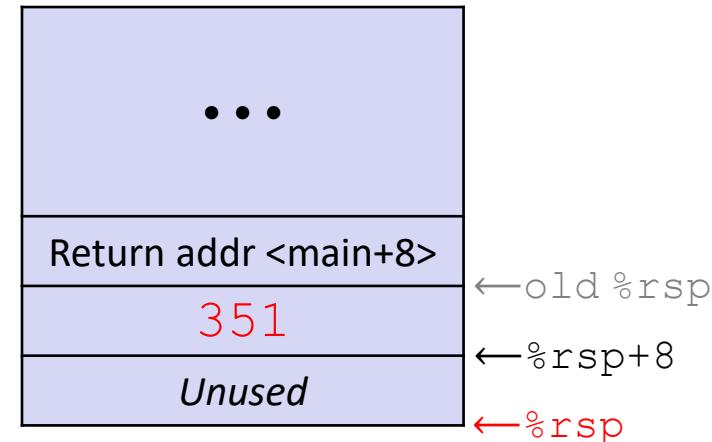


- ❖ Setup space for local variables
 - Only v1 needs space on the stack
- ❖ Compiler allocated extra space
 - Often does this for a variety of reasons, including alignment

Procedure Call Example (step 2)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Stack Structure

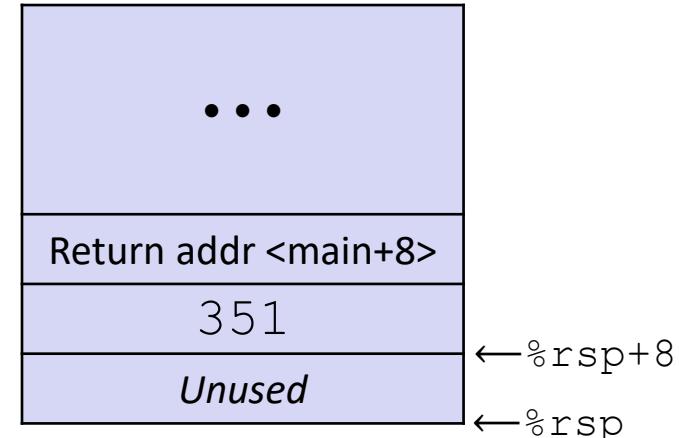

} Set up parameters for call
to increment

Aside: `movl` is used because 100 is a small positive value that fits in 32 bits. High order bits of `rsi` get set to zero automatically. It takes *one less byte* to encode a `movl` than a `movq`.

Register	Use(s)
%rdi	&v1
%rsi	100


Procedure Call Example (step 3)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

```
increment:
    movq    (%rdi), %rax
    addq    %rax, %rsi
    movq    %rsi, (%rdi)
    ret
```

Stack Structure

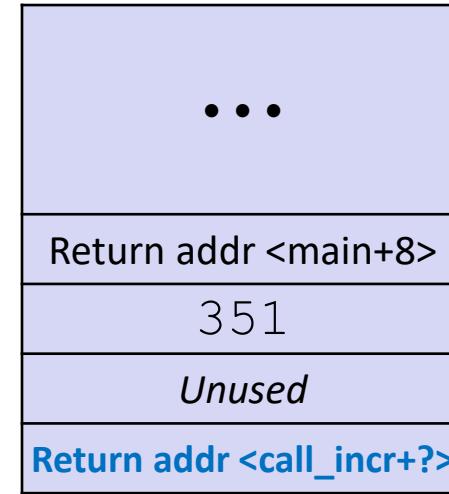

- ❖ State while inside increment
 - **Return address** on top of stack is address of the addq instruction immediately following call to increment

Register	Use(s)
%rdi	&v1
%rsi	100
%rax	


Procedure Call Example (step 4)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

```
increment:
    movq    (%rdi), %rax # x = *p
    addq    %rax, %rsi   # y = x + 100
    movq    %rsi, (%rdi) # *p = y
    ret
```

Stack Structure

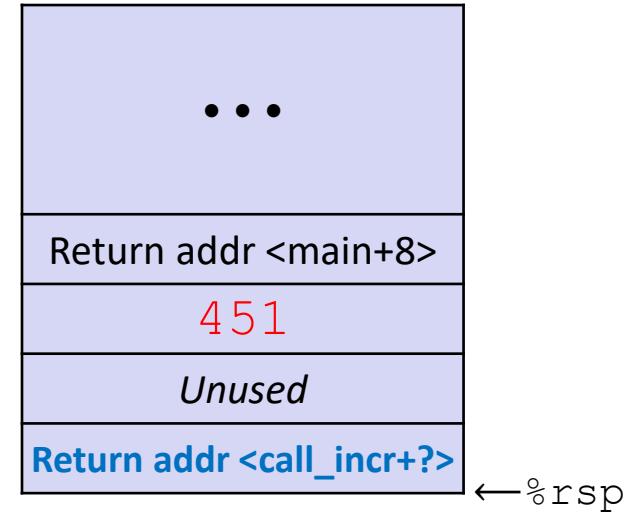

- ❖ State while inside `increment`
 - After code in body has been executed


Register	Use(s)
%rdi	&v1
%rsi	451
%rax	351

Procedure Call Example (step 5)

```
long call_incr() {  
    long v1 = 351;  
    long v2 = increment(&v1, 100);  
    return v1 + v2;  
}
```

```
call_incr:  
    subq    $16, %rsp  
    movq    $351, 8(%rsp)  
    movl    $100, %esi  
    leaq    8(%rsp), %rdi  
    call    increment  
    addq    8(%rsp), %rax  
    addq    $16, %rsp  
    ret
```

Stack Structure

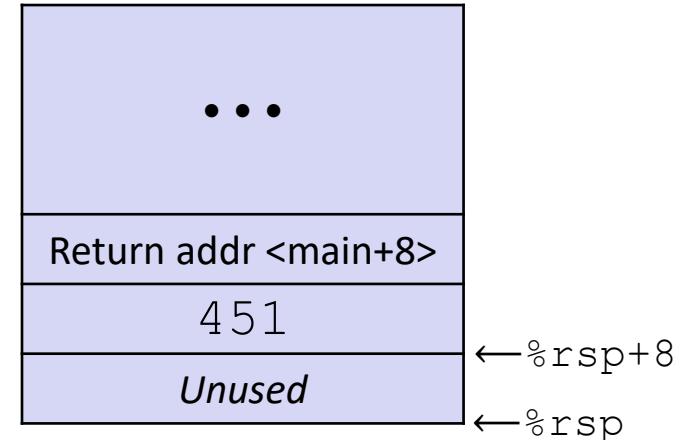

- ❖ After returning from call to increment
 - Registers and memory have been modified and return address has been popped off stack


Register	Use(s)
%rdi	&v1
%rsi	451
%rax	351

Procedure Call Example (step 6)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Stack Structure

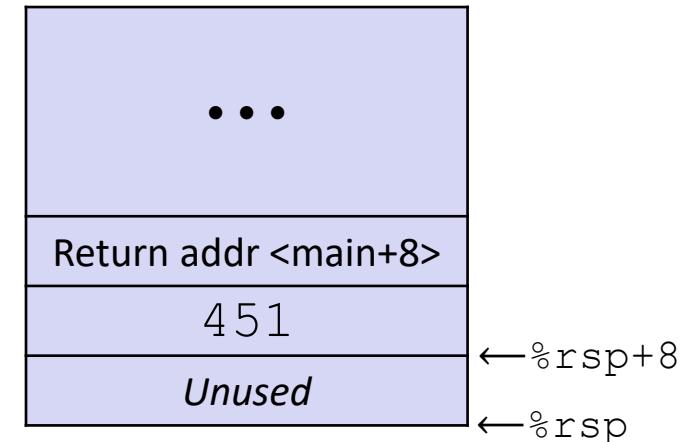

← Update $\%rax$ to contain $v1+v2$


Register	Use(s)
$\%rdi$	$\&v1$
$\%rsi$	451
$\%rax$	451+351

Procedure Call Example (step 7)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Stack Structure

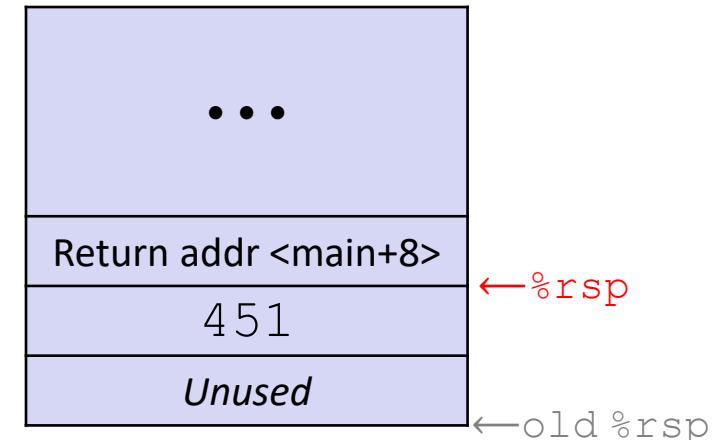

← De-allocate space for local vars


Register	Use(s)
%rdi	&v1
%rsi	451
%rax	802

Procedure Call Example (step 8)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Stack Structure

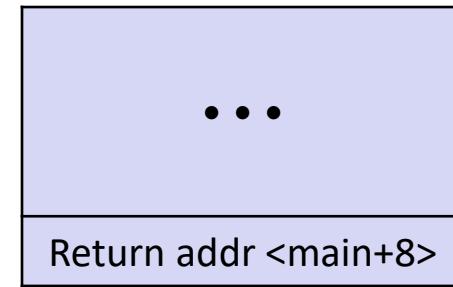

- ❖ State just before returning from call to call_incr


Register	Use(s)
%rdi	&v1
%rsi	451
%rax	802

Procedure Call Example (step 9)

```
long call_incr() {
    long v1 = 351;
    long v2 = increment(&v1, 100);
    return v1 + v2;
}
```

```
call_incr:
    subq    $16, %rsp
    movq    $351, 8(%rsp)
    movl    $100, %esi
    leaq    8(%rsp), %rdi
    call    increment
    addq    8(%rsp), %rax
    addq    $16, %rsp
    ret
```

Final Stack Structure

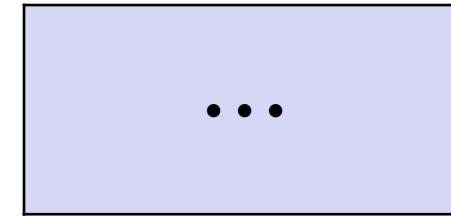

- ❖ State immediately *after* returning from call to `call_incr`
 - Return addr has been popped off stack
 - Control has returned to the instruction immediately following the call to `call_incr` (not shown here)

Register	Use(s)
%rdi	&v1
%rsi	451
%rax	802

Procedures

- ❖ Stack Structure
- ❖ Calling Conventions
 - Passing control
 - Passing data
 - Managing local data
- ❖ Register Saving Conventions
- ❖ Illustration of Recursion

Register Saving Conventions

- ❖ When procedure `whoa` calls `who`:
 - `whoa` is the *caller*
 - `who` is the *callee*
- ❖ Can registers be used for temporary storage?

`whoa:`

```
• • •  
movq $15213, %rdx  
call who  
addq %rdx, %rax  
• • •  
ret
```

`who:`

```
• • •  
subq $18213, %rdx  
• • •  
ret
```

- No! Contents of register `%rdx` overwritten by `who`!
- This could be trouble – something should be done. Either:
 - *Caller* should save `%rdx` before the call (and restore it after the call)
 - *Callee* should save `%rdx` before using it (and restore it before returning)

Register Saving Conventions

❖ “*Caller-saved*” registers

- It is the **caller**’s responsibility to save any important data in these registers before calling another procedure (*i.e.* the **callee** can freely change data in these registers)
- **Caller** saves values in its stack frame before calling **Callee**, then restores values after the call

❖ “*Callee-saved*” registers

- It is the callee’s responsibility to save any data in these registers before using the registers (*i.e.* the **caller** assumes the data will be the same across the **callee** procedure call)
- **Callee** saves values in its stack frame before using, then restores them before returning to **caller**

x86-64 Linux Register Usage, part 1

❖ %rax

- Return value
- Also **caller-saved** & restored
- Can be modified by procedure

❖ %rdi, ..., %r9

- Arguments
- Also **caller-saved** & restored
- Can be modified by procedure

❖ %r10, %r11

- **Caller**-saved & restored
- Can be modified by procedure

Return value

%rax

Arguments

%rdi

%rsi

%rdx

%rcx

%r8

%r9


Caller-saved
temporaries

%r10

%r11

x86-64 Linux Register Usage, part 2

- ❖ **%rbx, %r12, %r13, %r14, %r15**
 - **Callee**-saved
 - **Callee** must save & restore
- ❖ **%rbp**
 - **Callee**-saved
 - **Callee** must save & restore
 - May be used as frame pointer
 - Can mix & match
- ❖ **%rsp**
 - Special form of **callee** save
 - Restored to original value upon exit from procedure

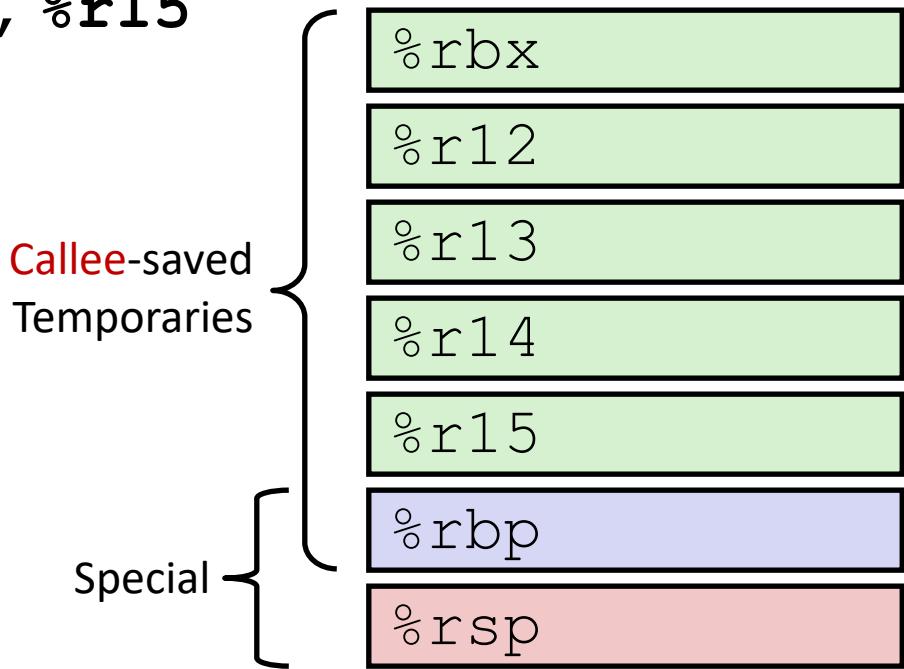

x86-64 64-bit Registers: Usage Conventions


%rax	Return value - Caller saved	%r8	Argument #5 - Caller saved
%rbx	Callee saved	%r9	Argument #6 - Caller saved
%rcx	Argument #4 - Caller saved	%r10	Caller saved
%rdx	Argument #3 - Caller saved	%r11	Caller Saved
%rsi	Argument #2 - Caller saved	%r12	Callee saved
%rdi	Argument #1 - Caller saved	%r13	Callee saved
%rsp	Stack pointer	%r14	Callee saved
%rbp	Callee saved	%r15	Callee saved

Callee-Saved Example (step 1)


```
long call_incr2(long x) {  
    long v1 = 351;  
    long v2 = increment(&v1, 100);  
    return x + v2;  
}
```

```
call_incr2:  
    pushq  %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $351, 8(%rsp)  
    movl    $100, %esi  
    leaq    8(%rsp), %rdi  
    call    increment  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

Initial Stack Structure

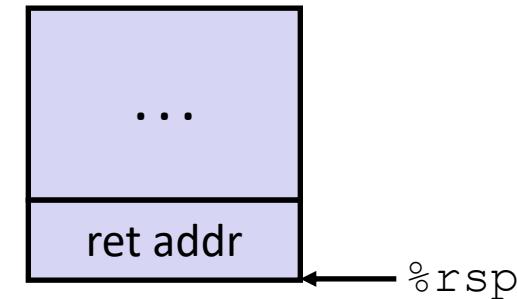

Resulting Stack Structure

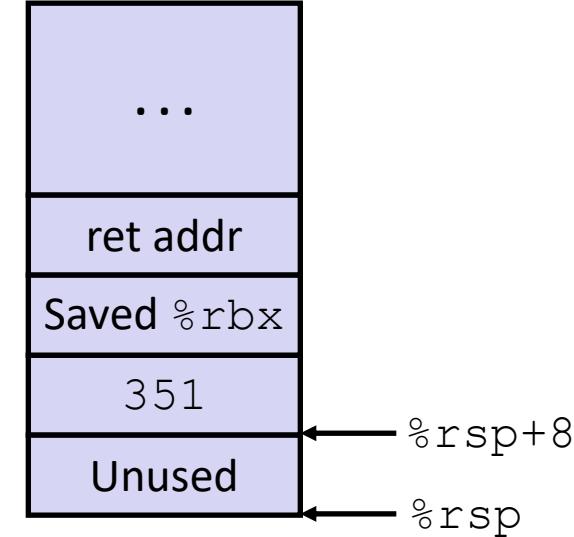


Callee-Saved Example (step 2)


```
long call_incr2(long x) {  
    long v1 = 351;  
    long v2 = increment(&v1, 100);  
    return x + v2;  
}
```

```
call_incr2:  
    pushq    %rbx  
    subq    $16, %rsp  
    movq    %rdi, %rbx  
    movq    $351, 8(%rsp)  
    movl    $100, %esi  
    leaq    8(%rsp), %rdi  
    call    increment  
    addq    %rbx, %rax  
    addq    $16, %rsp  
    popq    %rbx  
    ret
```

Stack Structure

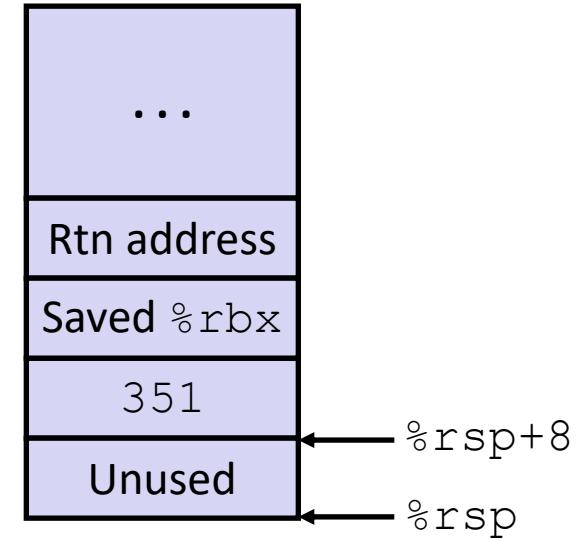

Pre-return Stack Structure

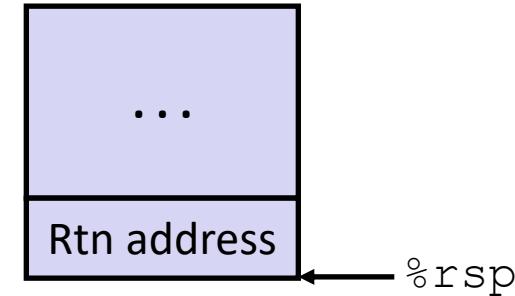

Why Caller *and* Callee Saved?

- ❖ We want *one* calling convention to simply separate implementation details between caller and callee
- ❖ In general, neither caller-save nor callee-save is “best”:
 - If caller isn’t using a register, caller-save is better
 - If callee doesn’t need a register, callee-save is better
 - If “do need to save”, callee-save generally makes smaller programs
 - Functions are called from multiple places
- ❖ So... “some of each” and compiler tries to “pick registers” that minimize amount of saving/restoring

Register Conventions Summary

- ❖ **Caller**-saved register values need to be pushed onto the stack before making a procedure call *only if the Caller needs that value later*
 - **Callee** may change those register values
- ❖ **Callee**-saved register values need to be pushed onto the stack *only if the Callee intends to use those registers*
 - **Caller** expects unchanged values in those registers
- ❖ Don't forget to restore/pop the values later!

Procedures

- ❖ Stack Structure
- ❖ Calling Conventions
 - Passing control
 - Passing data
 - Managing local data
- ❖ Register Saving Conventions
- ❖ Illustration of Recursion

Recursive Function

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

Compiler Explorer:

<https://godbolt.org/z/xFCrsw>

- Compiled with `-O1` for brevity instead of `-Og`
- Try `-O2` instead!

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret

.L8:
    pushq   %rbx
    movq    %rdi, %rbx
    shrq    %rdi
    call    pcount_r
    andl    $1, %ebx
    addq    %rbx, %rax
    popq   %rbx
    ret
```

Recursive Function: Base Case

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

Register	Use(s)	Type
%rdi	x	Argument
%rax	Return value	Return value


Trick because some AMD hardware doesn't like jumping to ret

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret
.L8:
    pushq   %rbx
    movq   %rdi, %rbx
    shrq   %rdi
    call    pcount_r
    andl    $1, %ebx
    addq   %rbx, %rax
    popq   %rbx
    ret
```

Recursive Function: **Callee** Register Save

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

The Stack

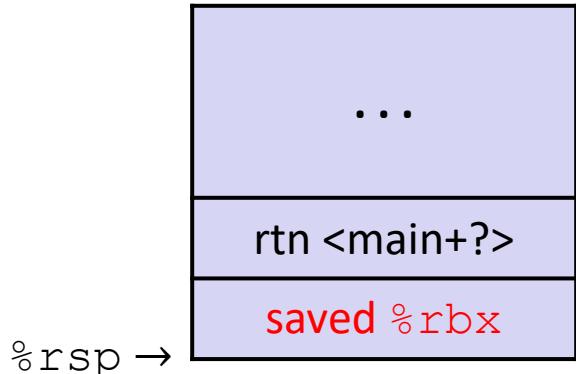

Need original value of `x` *after* recursive call to `pcount_r`.

“Save” by putting in `%rbx` (**callee** saved), but need to save old value of `%rbx` before you change it.

Register	Use(s)	Type
<code>%rdi</code>	<code>x</code>	Argument

`pcount_r:`

```
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret
```

.L8:

```
    pushq   %rbx
    movq    %rdi, %rbx
    shrq    %rdi
    call    pcount_r
    andl    $1, %ebx
    addq    %rbx, %rax
    popq    %rbx
    ret
```

Recursive Function: Call Setup

```
/* Recursive popcorn */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

Register	Use(s)	Type
%rdi	x (new)	Argument
%rbx	x (old)	Callee saved

The Stack



```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret


.L8:
    pushq   %rbx
    movq    %rdi, %rbx
    shrq    %rdi
    call    pcount_r
    andl    $1, %ebx
    addq    %rbx, %rax
    popq    %rbx
    ret
```

Recursive Function: Call

```
/* Recursive popcorn */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

Register	Use(s)	Type
%rax	Recursive call return value	Return value
%rbx	x (old)	Callee saved

The Stack

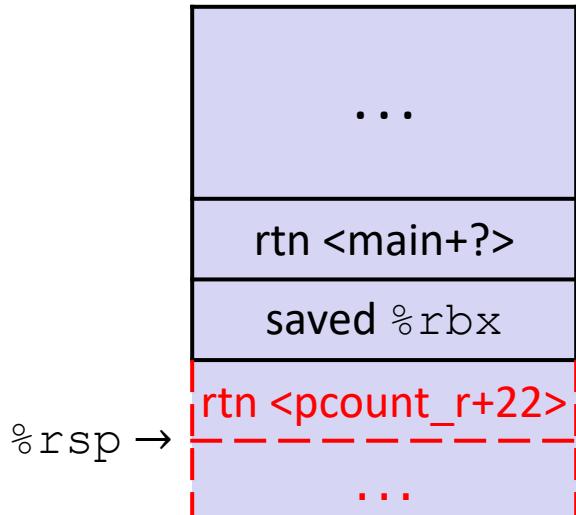

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret


.L8:
    pushq   %rbx
    movq    %rdi, %rbx
    shrq    %rdi
    call    pcount_r
    andl    $1, %ebx
    addq    %rbx, %rax
    popq    %rbx
    ret
```

Recursive Function: Result

```
/* Recursive popcorn */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

Register	Use(s)	Type
%rax	Return value	Return value
%rbx	x&1	Callee saved

The Stack

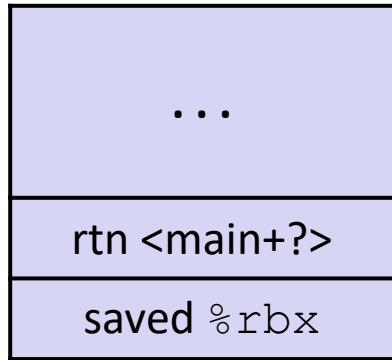

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret


.L8:
    pushq   %rbx
    movq    %rdi, %rbx
    shrq    %rdi
    call    pcount_r
    andl    $1, %ebx
    addq    %rbx, %rax
    popq    %rbx
    ret
```

Recursive Function: Completion

```
/* Recursive popcount */
long pcount_r(unsigned long x) {
    if (x == 0)
        return 0;
    else
        return (x & 1) + pcount_r(x >> 1);
}
```

Register	Use(s)	Type
%rax	Return value	Return value
%rbx	Previous %rbx value	Callee restored

The Stack

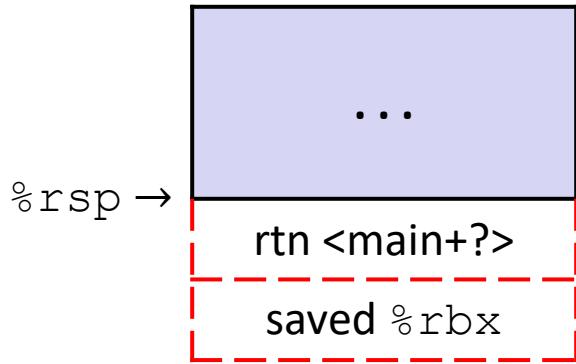

```
pcount_r:
    movl    $0, %eax
    testq   %rdi, %rdi
    jne     .L8
    rep ret
.L8:
    pushq   %rbx
    movq    %rdi, %rbx
    shrq    %rdi
    call    pcount_r
    andl    $1, %ebx
    addq    %rbx, %rax
    popq    %rbx
    ret
```

Observations About Recursion

- ❖ Works without any special consideration
 - Stack frames mean that each function call has private storage
 - Saved registers & local variables
 - Saved return address
 - Register saving conventions prevent one function call from corrupting another's data
 - Unless the code explicitly does so (e.g. buffer overflow)
 - Stack discipline follows call / return pattern
 - If P calls Q, then Q returns before P
 - Last-In, First-Out (LIFO)
- ❖ Also works for mutual recursion (P calls Q; Q calls P)

x86-64 Stack Frames

- ❖ Many x86-64 procedures have a minimal stack frame
 - Only return address is pushed onto the stack when procedure is called
- ❖ A procedure *needs* to grow its stack frame when it:
 - Has too many local variables to hold in **caller**-saved registers
 - Has local variables that are arrays or structs
 - Uses & to compute the address of a local variable
 - Calls another function that takes more than six arguments
 - Is using **caller**-saved registers and then calls a procedure
 - Modifies/uses **callee**-saved registers

x86-64 Procedure Summary

- ❖ Important Points
 - Procedures are a **combination of *instructions* and *conventions***
 - Conventions prevent functions from disrupting each other
 - Stack is the right data structure for procedure call/return
 - If P calls Q, then Q returns before P
 - Recursion handled by normal calling conventions
- ❖ Heavy use of registers
 - Faster than using memory
 - Use limited by data size and conventions
- ❖ Minimize use of the Stack

