

Structs & Alignment

CSE 351 Autumn 2021

Instructor:

Justin Hsia

Teaching Assistants:

Allie Pflieger

Atharva Deodhar

Francesca Wang

Joy Dang

Monty Nitschke

Anirudh Kumar

Celeste Zeng

Hamsa Shankar

Julia Wang

Morel Fotsing


Assaf Vayner

Dominick Ta

Isabella Nguyen

Maggie Jiang

Sanjana Chintalapati

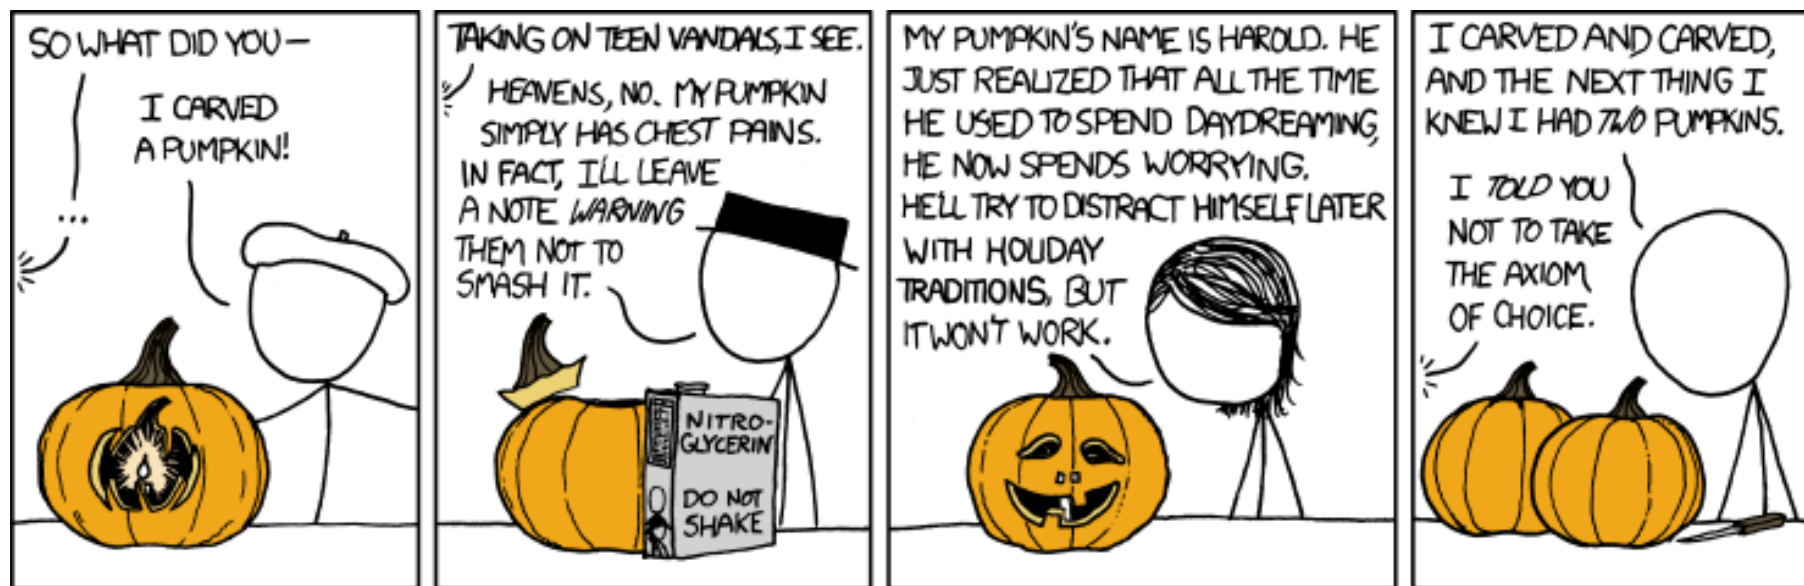

Relevant Course Information

- ❖ Lab 2 due tonight
- ❖ Lab 3 released next Monday (11/1)
 - A shorter lab, due Friday, 11/12
- ❖ hw13 due next Wednesday (11/3)
- ❖ **Take-home Midterm (11/3 – 11/5)**
 - Instructions will be posted on Ed Discussion
 - **Gilligan's Island Rule**: discuss high-level concepts and give hints, but not solving the problems together
 - We will be available on Ed Discussion (private posts, please) and office hours to answer clarifying questions

Reading Review

- ❖ Terminology:
 - Structs: tags and fields, . and -> operators
 - Typedef
 - Alignment, internal fragmentation, external fragmentation

- ❖ Questions from the Reading?

Review Questions

```
struct ll_node {
    long data;
    struct ll_node* next;
} n1, n2;
```

- ❖ How much space does (in bytes) does an instance of `struct ll_node` take?
- ❖ Which of the following statements are syntactically valid?
 - `n1.next = &n2;`
 - `n2->data = 351;`
 - `n1.next->data = 333;`
 - `(&n2)->next->next.data = 451;`

Data Structures in C

- ❖ Arrays
 - One-dimensional
 - Multi-dimensional (nested)
 - Multi-level
- ❖ **Structs**
 - **Alignment**
- ~~❖ Unions~~

Structs in C (Review)

- ❖ A structured group of variables, possibly including other structs
 - Way of defining compound data types

```
struct song {
    char* title;
    int lengthInSeconds;
    int yearReleased;
};

struct song song1;
song1.title = "drivers license";
song1.lengthInSeconds = 242;
song1.yearReleased = 2021;

struct song song2;
song2.title = "Call Me Maybe";
song2.lengthInSeconds = 193;
song2.yearReleased = 2011;
```

```
struct song {
    char* title;
    int lengthInSeconds;
    int yearReleased;
};
```

```
song1
title: "drivers license"
lengthInSeconds:    242
yearReleased:      2021
```

```
song2
title:  "Call Me Maybe"
lengthInSeconds:    193
yearReleased:      2011
```

Struct Definitions (Review)

❖ Structure definition:

- Does NOT declare a variable
- Variable type is “**struct name**”

```
struct name {  
    /* fields */  
};
```

Easy to forget
semicolon!

❖ Variable declarations like any other data type:

```
struct name name1, *pn, name_ar[3];
```

instance

pointer

array

❖ Can also combine struct and instance definitions:

- This syntax can be difficult to read, though

```
struct name {  
    /* fields */  
} st, *p = &st;
```

Typedef in C (Review)

- ❖ A way to create an *alias* for another data type:

```
typedef <data type> <alias>;
```

- After typedef, the alias can be used interchangeably with the original data type
- *e.g.*, `typedef unsigned long int uli;`

- ❖ Joint struct definition and typedef

- Don't need to give struct a name in this case


```
struct nm {  
    /* fields */  
};  
typedef struct nm name;  
name n1;
```



```
typedef struct {  
    /* fields */  
} name;  
name n1;
```


Scope of Struct Definition (Review)

- ❖ Why is the placement of struct definition important?
 - Declaring a variable creates space for it somewhere
 - Without definition, program doesn't know how much space

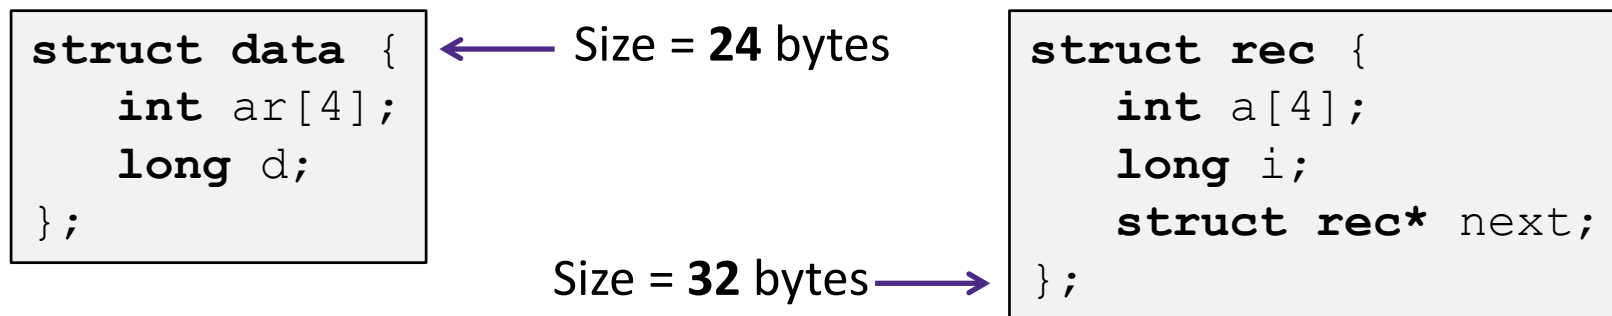

- ❖ Almost always define structs in global scope near the top of your C file
 - Struct definitions follow normal rules of scope

Accessing Structure Members (Review)

- ❖ Given a struct instance, access member using the `.` operator:

```
struct rec r1;  
r1.i = val;
```

- ❖ Given a *pointer* to a struct:

```
struct rec* r;  
r = &r1; // or malloc space for r to point to
```

We have two options:

- Use `*` and `.` operators: `(*r).i = val;`
- Use `->` operator (shorter): `r->i = val;`

- ❖ **In assembly:** register holds address of the first byte
 - Access members with offsets

```
struct rec {  
    int a[4];  
    long i;  
    struct rec* next;  
};
```


Java side-note

```
class Record { ... }  
Record x = new Record();
```

- ❖ An instance of a class is like a *pointer to* a struct containing the fields
 - (Ignoring methods and subclassing for now)
 - So Java's $x.f$ is like C's $x \rightarrow f$ or $(*x).f$
- ❖ In Java, almost everything is a pointer ("*reference*") to an object
 - Cannot declare variables or fields that are structs or arrays
 - Always a *pointer* to a struct or array
 - So every Java variable or field is ≤ 8 bytes (but can point to lots of data)

Structure Representation (Review)

```
struct rec {  
    int a[4];  
    long i;  
    struct rec* next;  
} st, *r = &st;
```

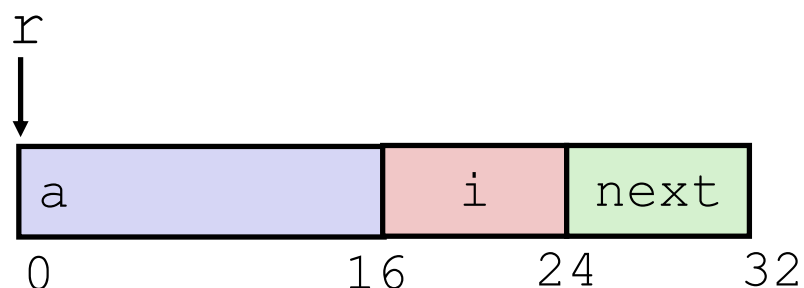


❖ Characteristics

- Contiguously-allocated region of memory
- Refer to members within structure by names
- Fields may be of different types

Structure Representation (Review)


```
struct rec {  
    int a[4];  
    long i;  
    struct rec* next;  
} st, *r = &st;
```

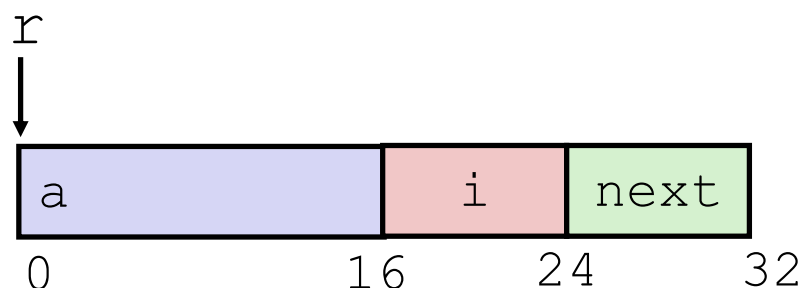

- ❖ Structure represented as block of memory
 - Big enough to hold all of the fields
- ❖ Fields ordered according to declaration order
 - Even if another ordering would be more compact
- ❖ Compiler determines overall size + positions of fields
 - Machine-level program has no understanding of the structures in the source code

Accessing a Structure Member

```
struct rec {
    int a[4];
    long i;
    struct rec* next;
} st, *r = &st;
```

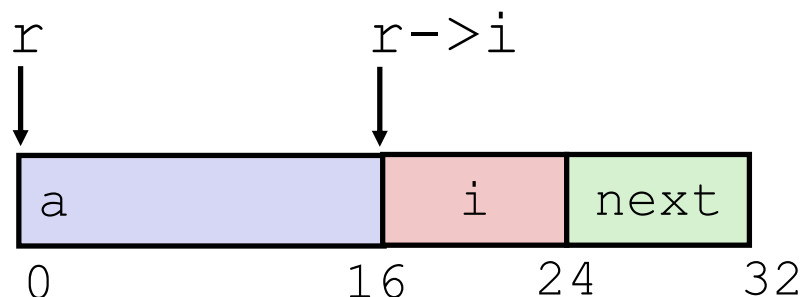

- ❖ Compiler knows the *offset* of each member
 - No pointer arithmetic; compute as $*(r + \text{offset})$

```
long get_i(struct rec* r) {
    return r->i;
}
```


```
# r in %rdi
movq 16(%rdi), %rax
ret
```

```
long get_a3(struct rec* r) {
    return r->a[3];
}
```

```
# r in %rdi
movl 12(%rdi), %rax
ret
```

Pointer to Structure Member

```
struct rec {  
    int a[4];  
    long i;  
    struct rec* next;  
} st, *r = &st;
```

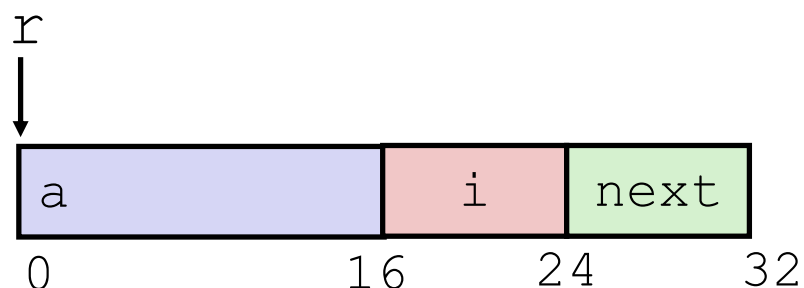

```
long* addr_of_i(struct rec* r)  
{  
    return &(r->i);  
}
```

```
# r in %rdi  
leaq 16(%rdi), %rax  
ret
```

```
struct rec** addr_of_next(struct rec* r)  
{  
    return &(r->next);  
}
```


```
# r in %rdi  
leaq 24(%rdi), %rax  
ret
```

Generating Pointer to Array Element

```

struct rec {
    int a[4];
    long i;
    struct rec* next;
} st, *r = &st;

```

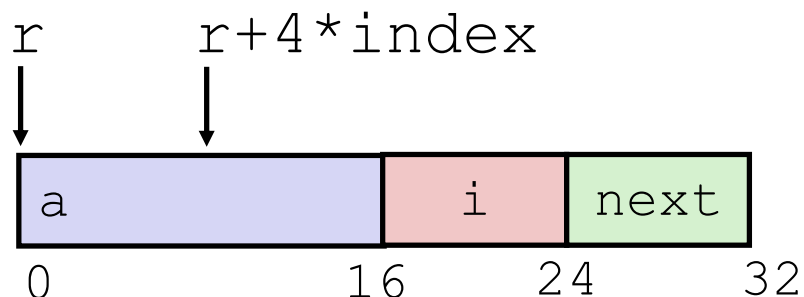

❖ Generating Pointer to Array Element

- Offset of each structure member determined at compile time
- Compute as:
 $r+4*index$

```

int* find_addr_of_array_elem
(struct rec* r, long index)
{
    return &r->a[index];
}

```

$\&(r \rightarrow a[index])$

```

# r in %rdi, index in %rsi
leaq (%rdi,%rsi,4), %rax
ret


```


Struct Pointers

- ❖ Pointers store addresses, which all “look” the same
 - Lab 0 Example: struct instance Scores could be treated as array of ints of size 4 via pointer casting
 - A struct pointer doesn't *have* to point to a declared instance of that struct type
- ❖ Different struct fields may or may not be meaningful, depending on what the pointer points to
 - This will be important for Lab 5!

```
long get_a3(struct rec* r) {  
    return r->a[3];  
}
```

```
movl 12(%rdi), %rax  
ret
```

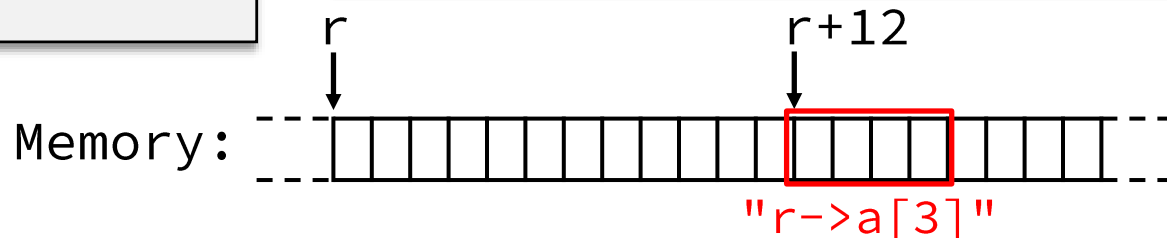

Alignment Principles

❖ Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of K
- Required on some machines; advised on x86-64

❖ Motivation for Aligning Data

- Memory accessed by (aligned) chunks of bytes (width is system dependent)
 - Inefficient to load or store value that spans quad word boundaries
 - Virtual memory trickier when value spans 2 pages (more on this later)
- Though x86-64 hardware will work regardless of alignment of data


Memory Alignment in x86-64

- ❖ *Aligned* means that any primitive object of K bytes must have an address that is a multiple of K
- ❖ Aligned addresses for data types:

K	Type	Addresses
1	char	No restrictions
2	short	Lowest bit must be zero: $\dots 0_2$
4	int, float	Lowest 2 bits zero: $\dots 00_2$
8	long, double, *	Lowest 3 bits zero: $\dots 000_2$
16	long double	Lowest 4 bits zero: $\dots 0000_2$

Structures & Alignment (Review)

❖ Unaligned Data

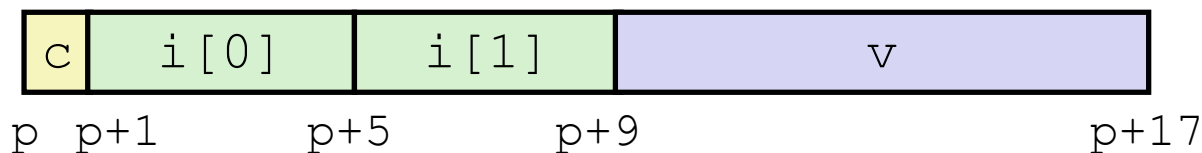


```

struct S1 {
    char c;
    int i[2];
    double v;
} st, *p = &st;
    
```

❖ Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of K

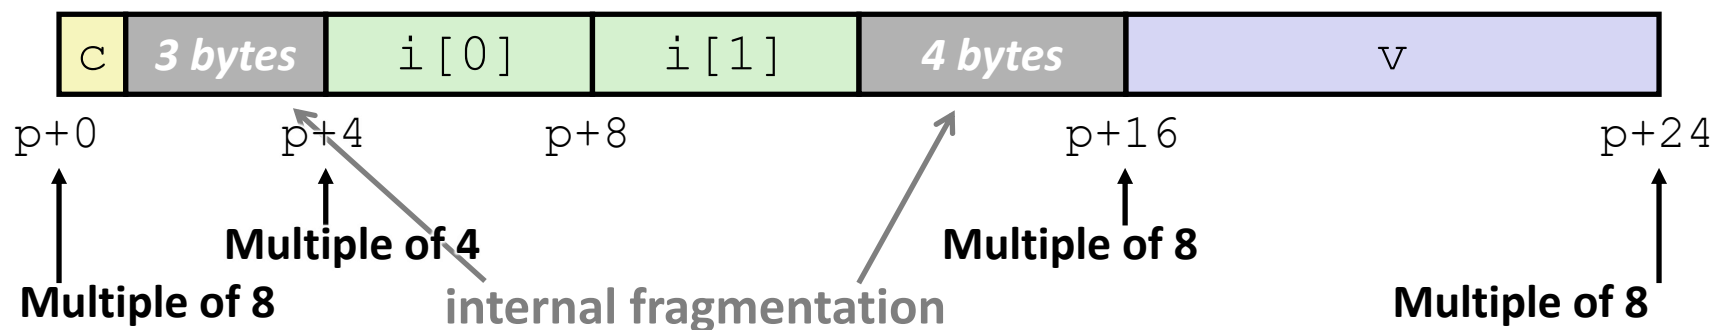


Satisfying Alignment with Structures (1)

- ❖ Within structure:
 - Must satisfy each element's alignment requirement
- ❖ Overall structure placement
 - Each structure has alignment requirement K_{\max}
 - K_{\max} = Largest alignment of any element
 - Counts array elements individually as elements
- ❖ Example:
 - $K_{\max} = 8$, due to `double` element

```

struct S1 {
    char c;
    int i[2];
    double v;
} st, *p = &st;

```

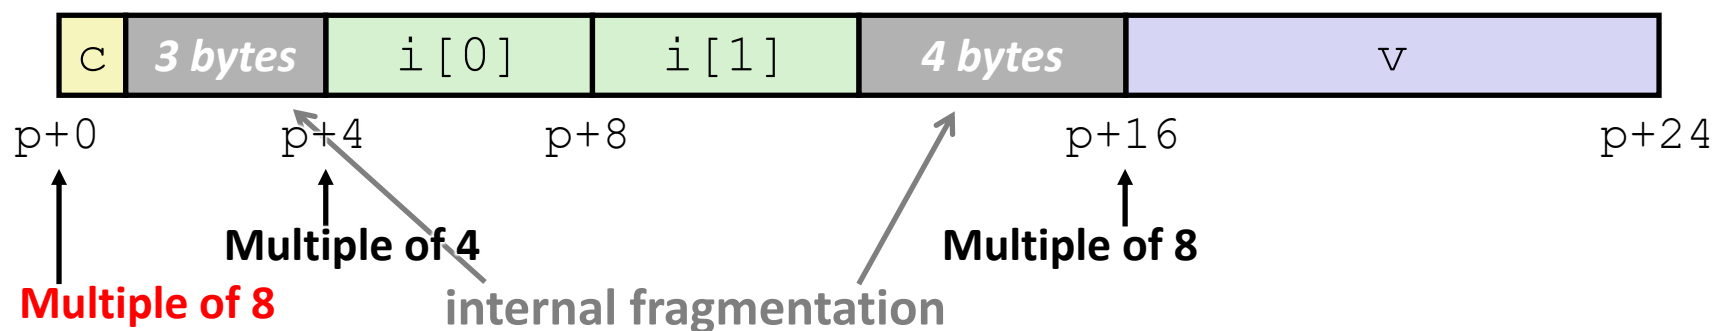


Satisfying Alignment with Structures (2)

- ❖ Can find offset of individual fields using `offsetof()`
 - Need to `#include <stddef.h>`
 - Example: `offsetof(struct S2, c)` returns 16

```
struct S2 {
    double v;
    int i[2];
    char c;
} st, *p = &st;
```


- ❖ For largest alignment requirement K_{\max} , **overall structure size must be multiple of K_{\max}**
 - Compiler will add padding **at end** of structure to meet overall structure alignment requirement

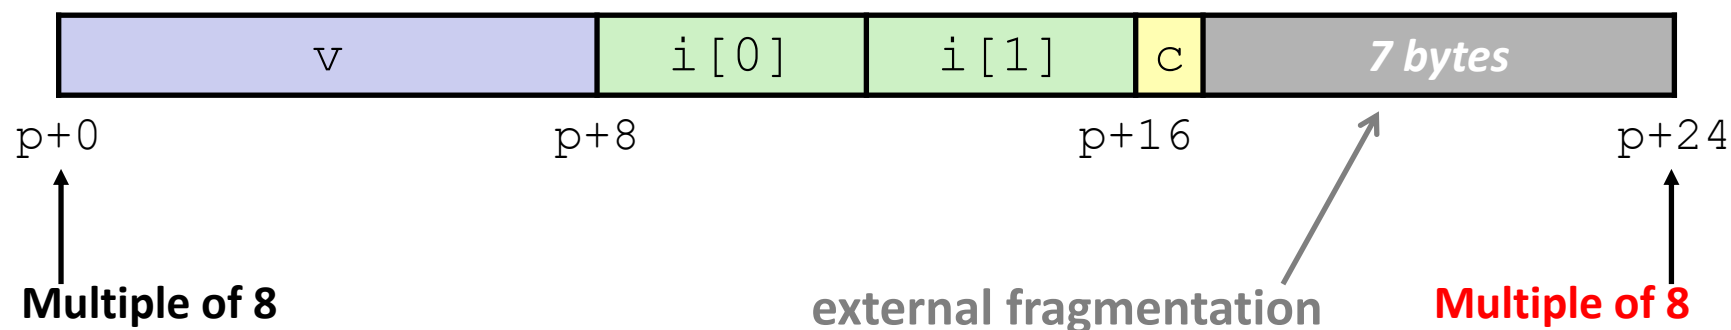

Arrays of Structures

- ❖ Overall structure length multiple of K_{max}
- ❖ Satisfy alignment requirement for every element in array

```
struct S2 {  
    double v;  
    int i[2];  
    char c;  
} a[10];
```

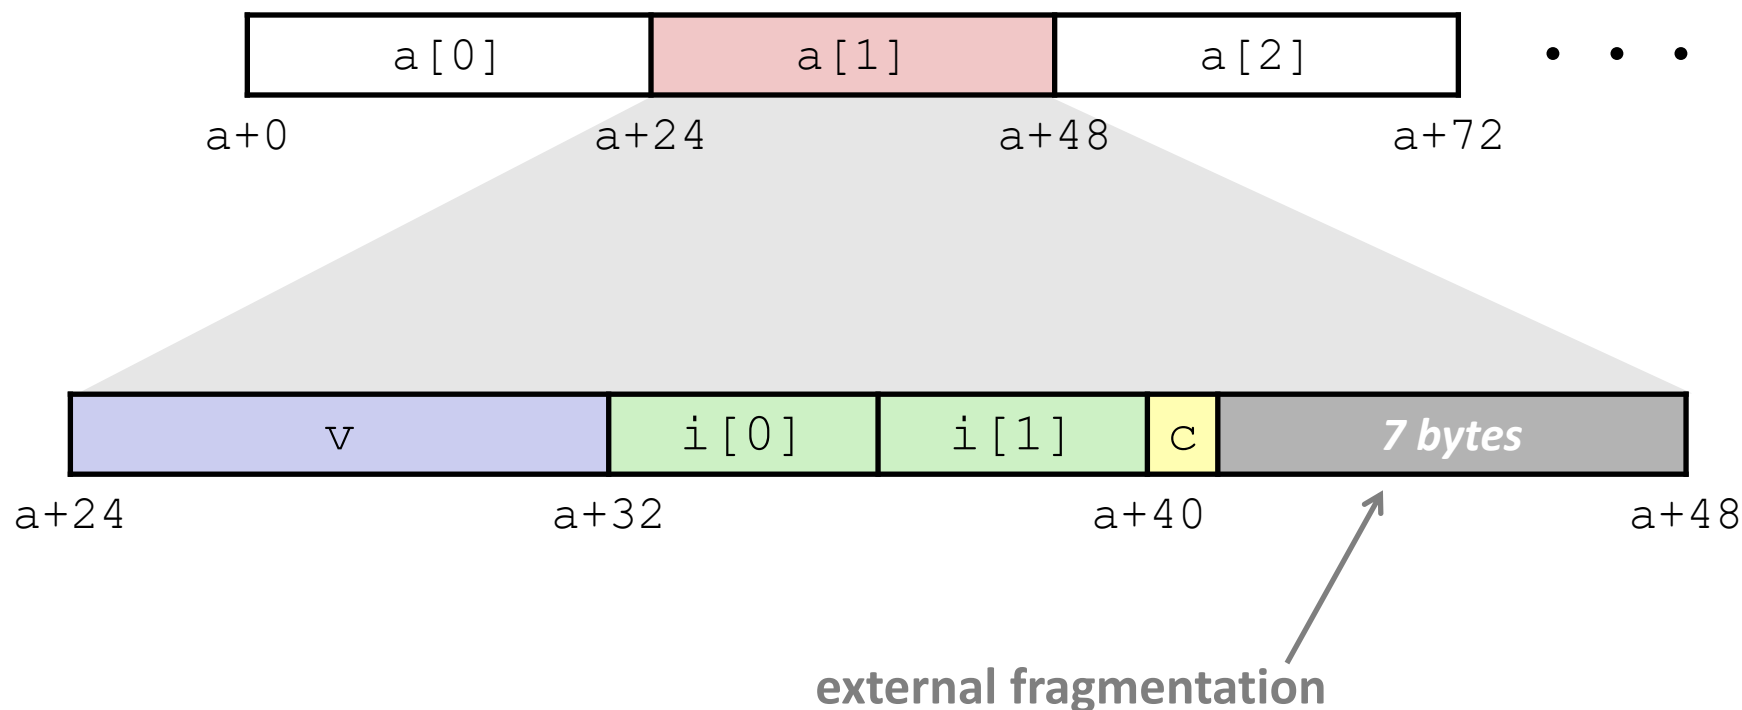

Alignment of Structs (Review)

- ❖ Compiler will do the following:
 - Maintains declared *ordering* of fields in struct
 - Each **field** must be aligned *within* the struct (*may insert padding*)
 - `offsetof` can be used to get actual field offset
 - Overall struct must be **aligned** according to largest field
 - Total struct **size** must be multiple of its alignment (*may insert padding*)
 - `sizeof` should be used to get true size of structs


How the Programmer Can Save Space

- ❖ Compiler must respect order elements are declared in
 - Sometimes the programmer can save space by declaring large data types first


```
struct S4 {  
    char c;  
    int i;  
    char d;  
} st;
```



```
struct S5 {  
    int i;  
    char c;  
    char d;  
} st;
```

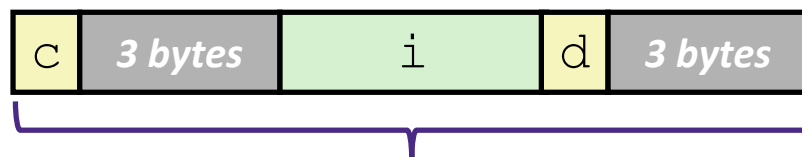

12 bytes

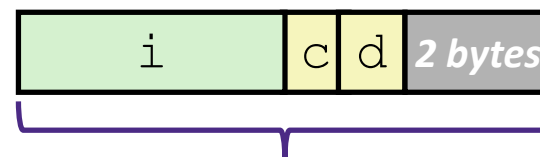

8 bytes

Practice Question

- ❖ Minimize the size of the struct by re-ordering the vars

```
struct old {
    int i;

    short s[3];

    char* c;

    float f;
};
```



```
struct new {
    int i;

    _____;

    _____;


    _____;
};
```

- ❖ What are the old and new sizes of the struct?

sizeof(struct old) = 32 B

sizeof(struct new) = _____

- A. 22 bytes
- B. 24 bytes
- C. 28 bytes
- D. 32 bytes
- E. We're lost...

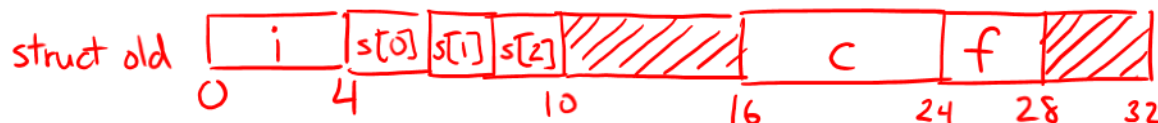

Summary

- ❖ Arrays in C
 - Aligned to satisfy every element's alignment requirement
- ❖ Structures
 - Allocate bytes for fields in order declared by programmer
 - Pad in middle to satisfy individual element alignment requirements
 - Pad at end to satisfy overall struct alignment requirement