

Disjoint Union / Find

CSE 373

Data Structures

Lecture 16

Reading

- Reading
 - › Chapter 8 (you can skip Section 6)

Equivalence Relations

- A relation R is defined on set S if for every pair of elements $a, b \in S$, $a R b$ is either true or false.
- An equivalence relation is a relation R that satisfies the 3 properties:
 - › Reflexive: $a R a$ for all $a \in S$
 - › Symmetric: $a R b$ iff $b R a$; $a, b \in S$
 - › Transitive: $a R b$ and $b R c$ implies $a R c$

Equivalence Classes

- Given an equivalence relation R , decide whether a pair of elements $a, b \in S$ is such that $a R b$.
- The equivalence class of an element a is the subset of S of all elements related to a .
- Equivalence classes are disjoint sets

Dynamic Equivalence Problem

- Starting with each element in a singleton set, and an equivalence relation, build the equivalence classes
- Requires two operations:
 - › Find the equivalence class (set) of a given element
 - › Union of two sets
- It is a dynamic (on-line) problem because the sets change during the operations and Find must be able to cope!

Disjoint Union - Find

- Maintain a set of pairwise disjoint sets.
 - › $\{3,5,7\}$, $\{4,2,8\}$, $\{9\}$, $\{1,6\}$
- Each set has a unique name, one of its members
 - › $\{3,\underline{5},7\}$, $\{4,2,\underline{8}\}$, $\{\underline{9}\}$, $\{\underline{1},6\}$

Union


- Union(x,y) – take the union of two sets named x and y
 - › {3,5,7} , {4,2,8}, {9}, {1,6}
 - › Union(5,1)
{3,5,7,1,6}, {4,2,8}, {9},

Find

- Find(x) – return the name of the set containing x.
 - › {3,5,7,1,6}, {4,2,8}, {9},
 - › Find(1) = 5
 - › Find(4) = 8


An Application

- Build a random maze by erasing edges.

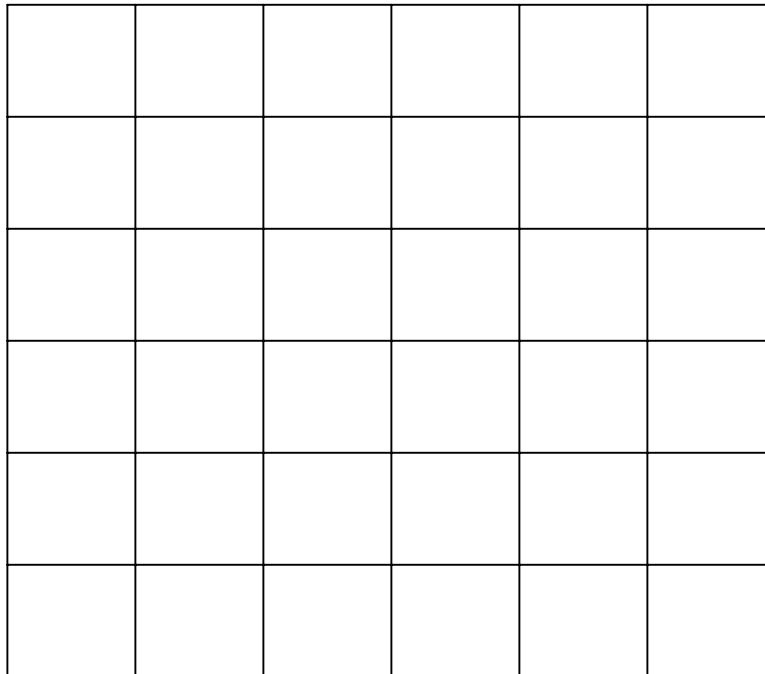


An Application (ct'd)

- Pick Start and End

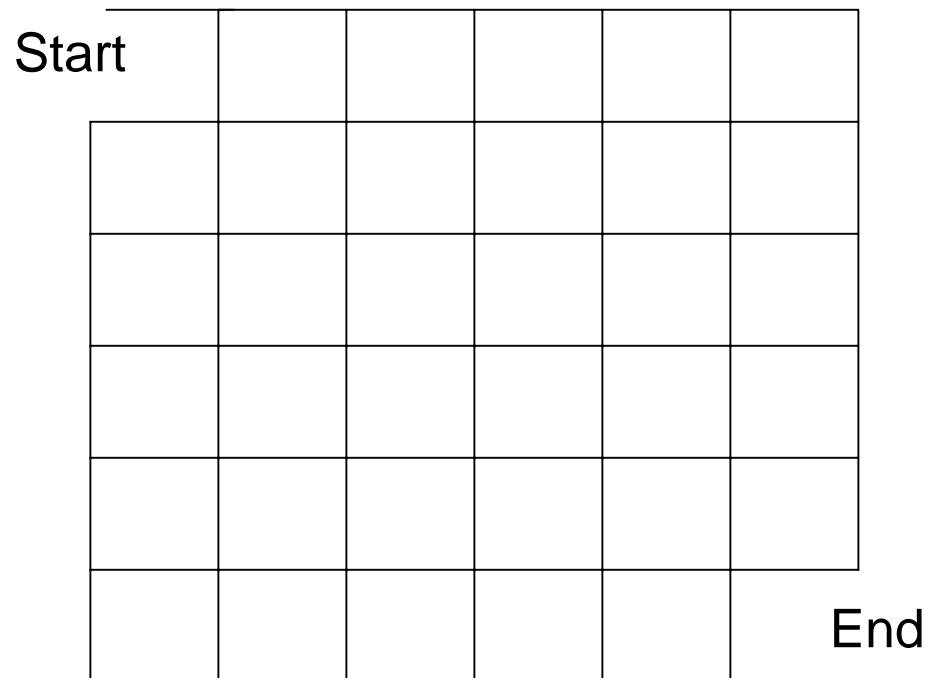

An Application (ct'd)


- Repeatedly pick random edges to delete.

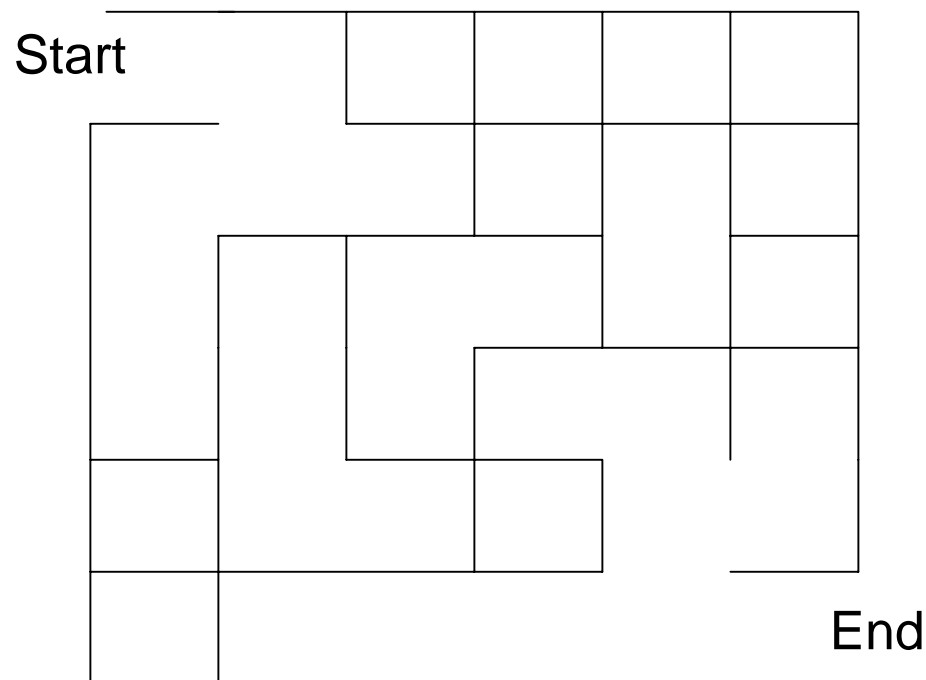


Desired Properties

- None of the boundary is deleted
- Every cell is reachable from every other cell.
- There are no cycles – no cell can reach itself by a path unless it retraces some part of the path.

A Cycle (we don't want that)

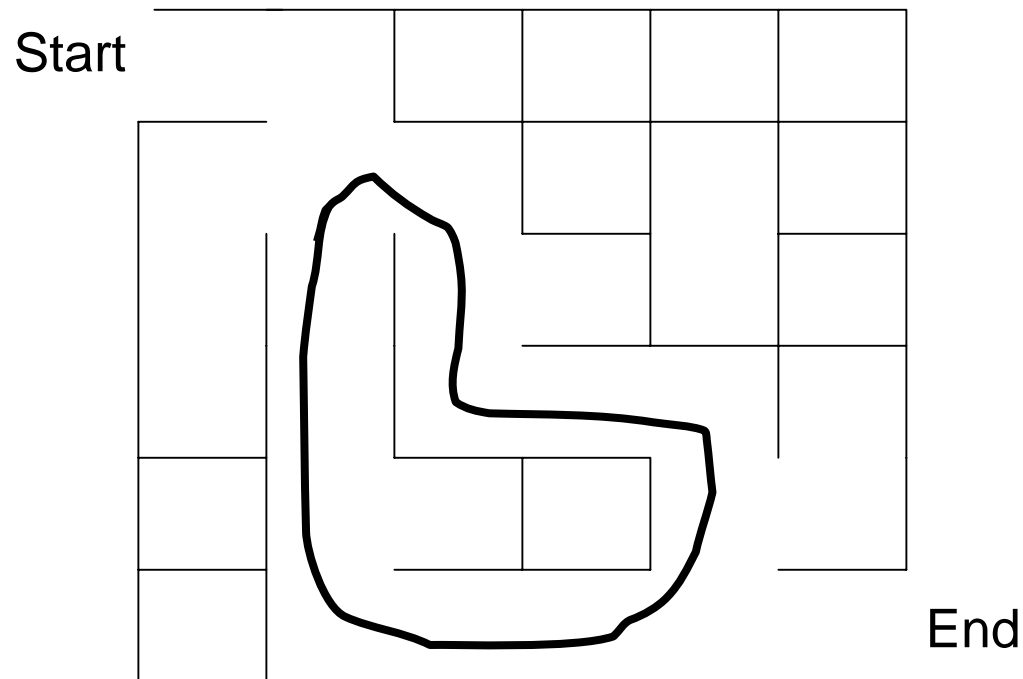

Good Solution : A Hidden Tree

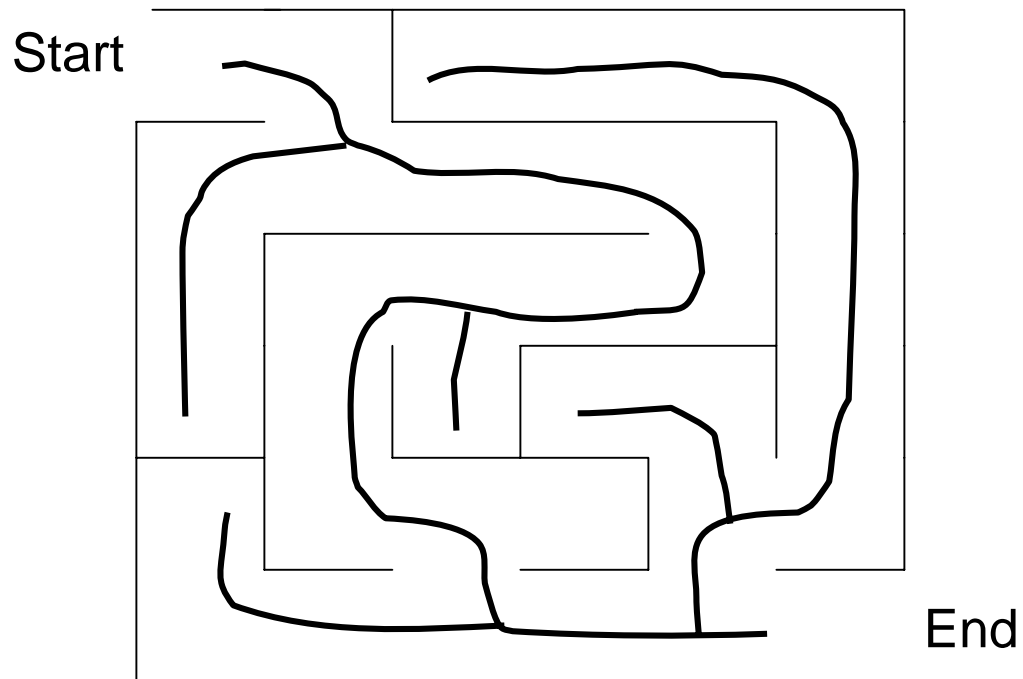

Number the Cells

We have disjoint sets $S = \{ \{1\}, \{2\}, \{3\}, \{4\}, \dots, \{36\} \}$ each cell is unto itself.
We have all possible edges $E = \{ (1,2), (1,7), (2,8), (2,3), \dots \}$ 60 edges total.

Start	1	2	3	4	5	6	
	7	8	9	10	11	12	
	13	14	15	16	17	18	
	19	20	21	22	23	24	
	25	26	27	28	29	30	
	31	32	33	34	35	36	End

Basic Algorithm

- S = set of sets of connected cells
- E = set of edges
- Maze = set of maze edges initially empty

```
While there is more than one set in S
  pick a random edge (x,y) and remove from E
  u := Find(x); v := Find(y);
  if u ≠ v then
    Union(u,v) //knock down the wall between the cells (cells in
               //the same set are connected)
  else
    add (x,y) to Maze //don't remove because there is already
                     // a path between x and y
All remaining members of E together with Maze form the maze
```


Example Step

Pick (8,14)

Start	1	2	3	4	5	6
	7	8	9	10	11	12
	13	14	15	16	17	18
	19	20	21	22	23	24
	25	26	27	28	29	30
	31	32	33	34	35	36
					End	

- S
- {1,2,7,8,9,13,19}
 - {3}
 - {4}
 - {5}
 - {6}
 - {10}
 - {11,17}
 - {12}
 - {14,20,26,27}
 - {15,16,21}
 - .
 - .
 - {22,23,24,29,30,32
 - 33,34,35,36}

Example

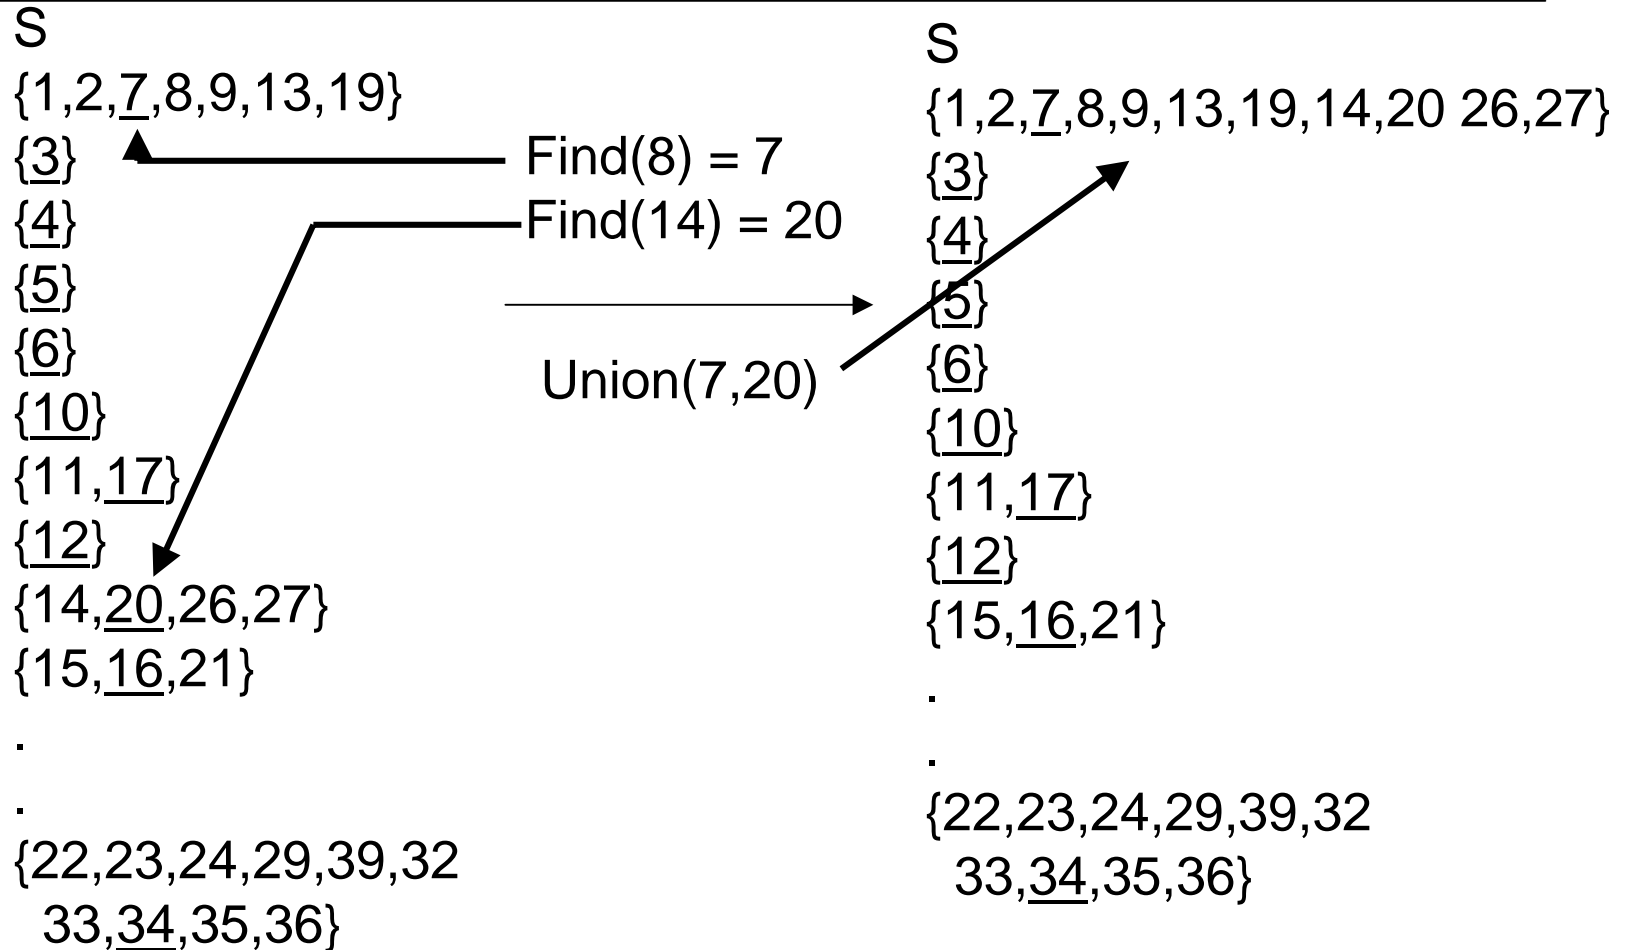

Example



S

{1,2,7,8,9,13,19
14,20,26,27}

{3}

{4}

{5}

{6}

{10}

{11,17}

{12}

{15,16,21}


.

.

{22,23,24,29,39,32
33,34,35,36}

Example at the End

S
{1,2,3,4,5,6,7,... 36}

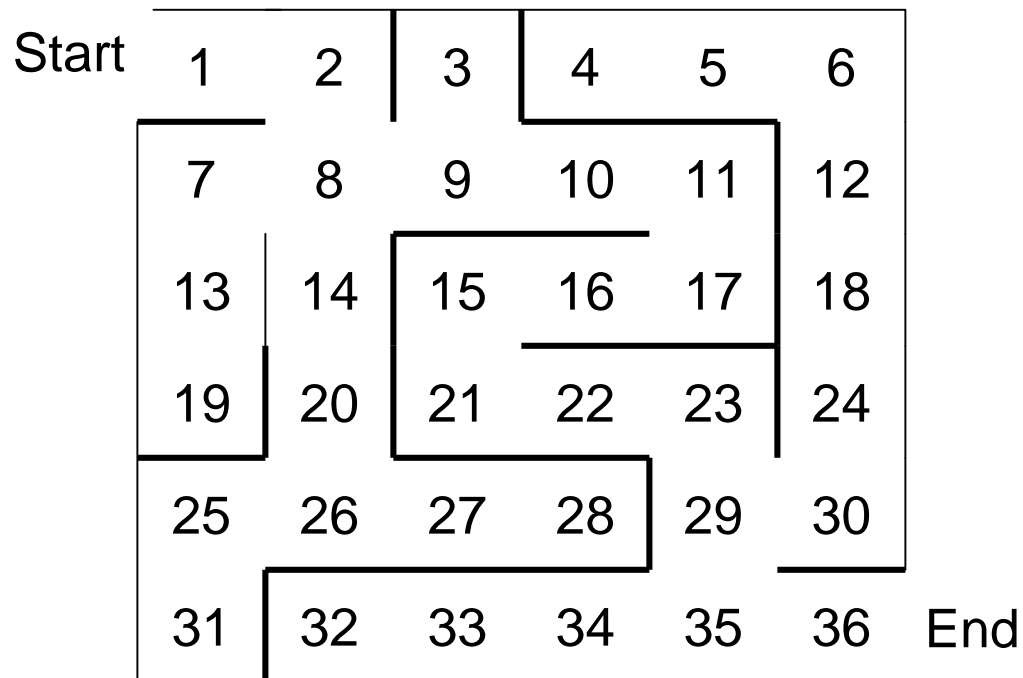


— E
— Maze

Up-Tree for DU/F

Initial state




Intermediate state

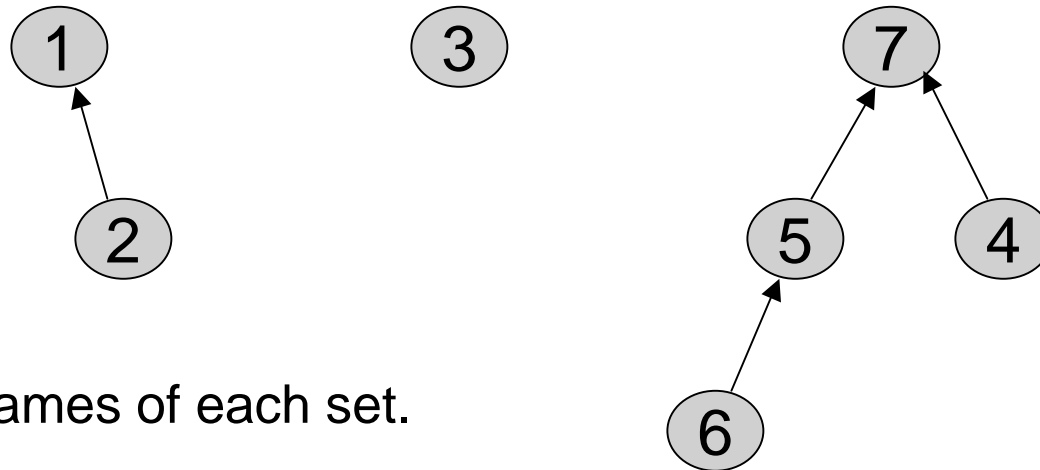

Roots are the names of each set.


Find Operation

- Find(x) follow x to the root and return the root

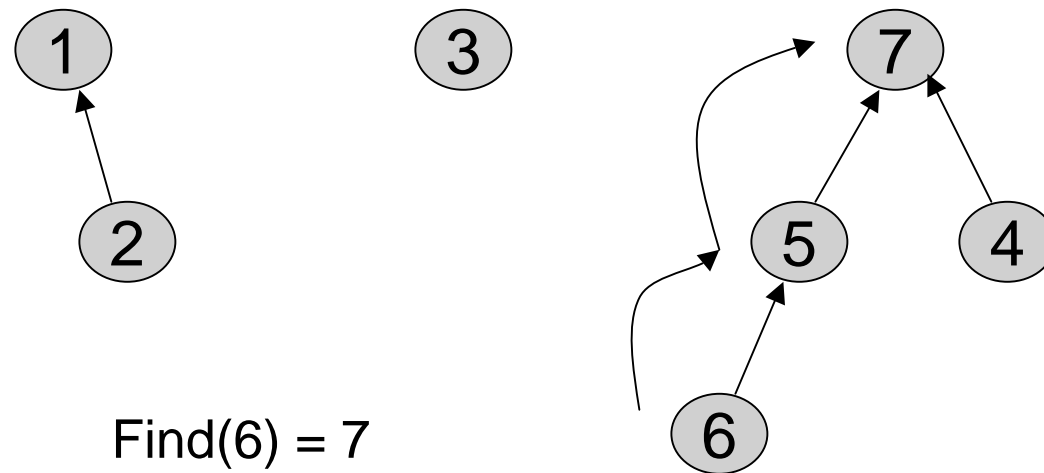

Union Operation

- $\text{Union}(i,j)$ - assuming i and j roots, point i to j .

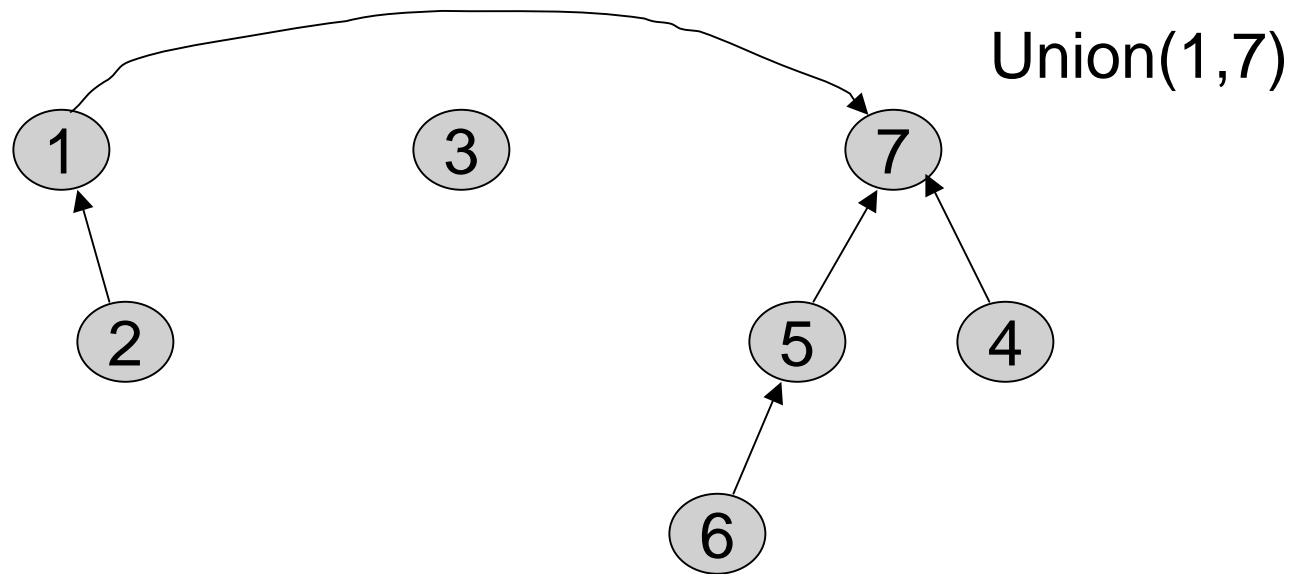


Simple Implementation

- Array of indices (Up[i] is parent of i)

	1	2	3	4	5	6	7
up	0	1	0	7	7	5	0

Up [x] = 0 means
x is a root.

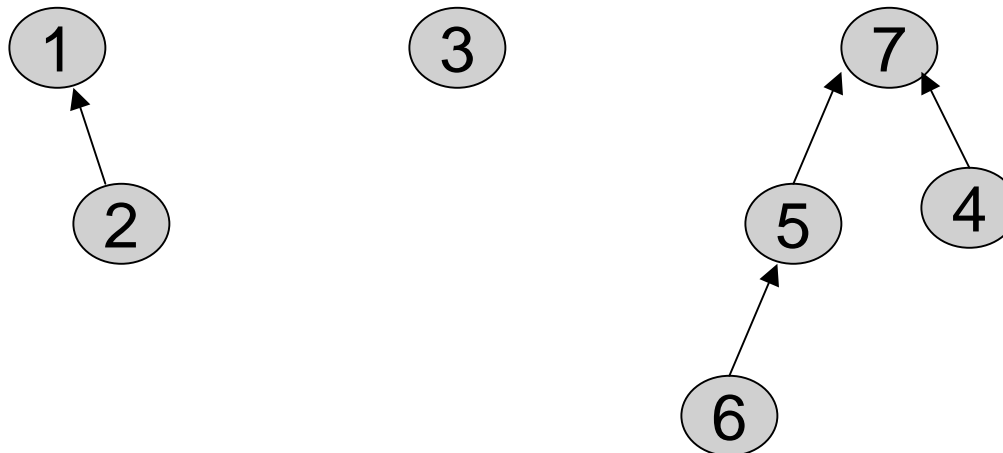

Union

```
Union(up[] : integer array, x,y : integer) : {  
  //precondition: x and y are roots//  
  Up[x] := y  
}
```


Constant Time!

Find

- Design Find operator
 - › Recursive version
 - › Iterative version


```
Find(up[] : integer array, x : integer) : integer {  
  //precondition: x is in the range 1 to size//  
  ???  
}
```

A Bad Case

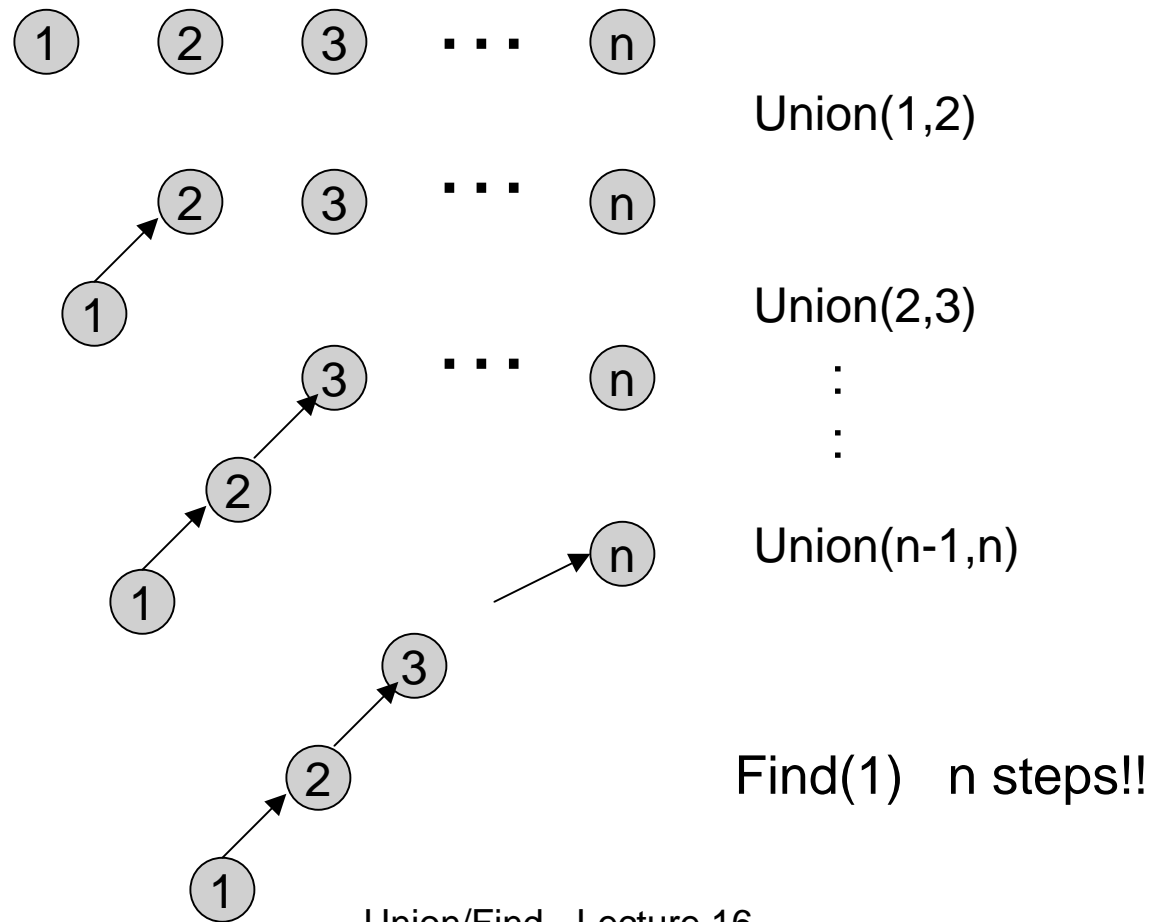


Weighted Union

- Weighted Union (weight = number of nodes)
 - › Always point the smaller tree to the root of the larger tree

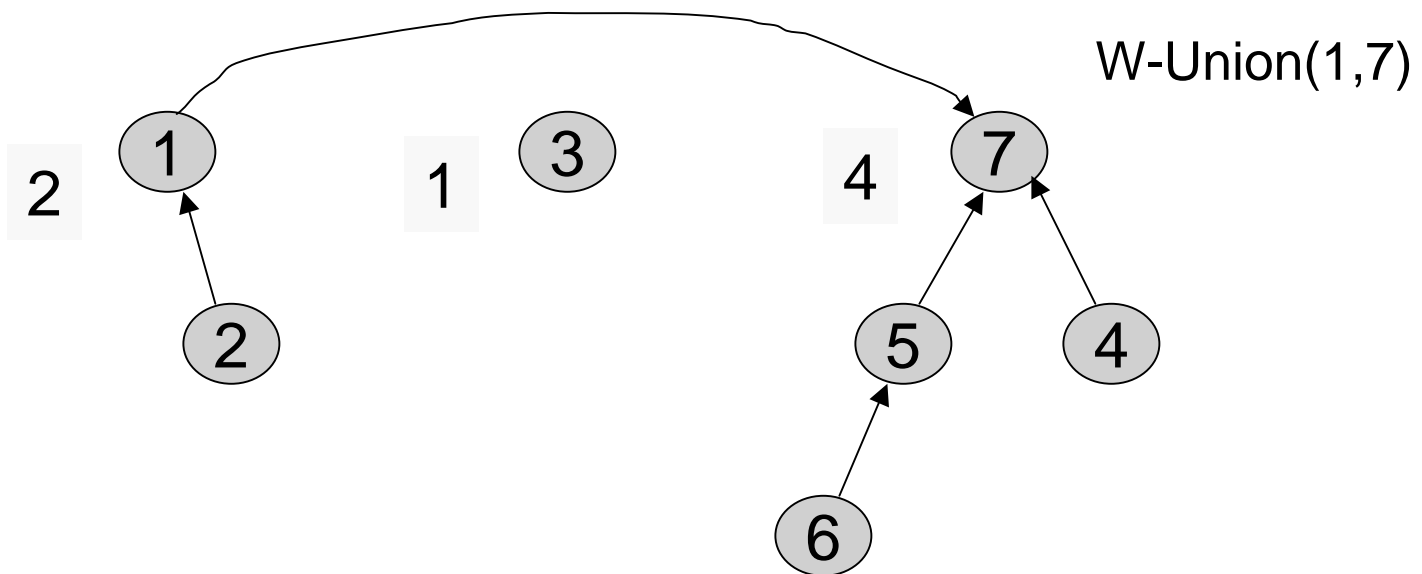


Example Again

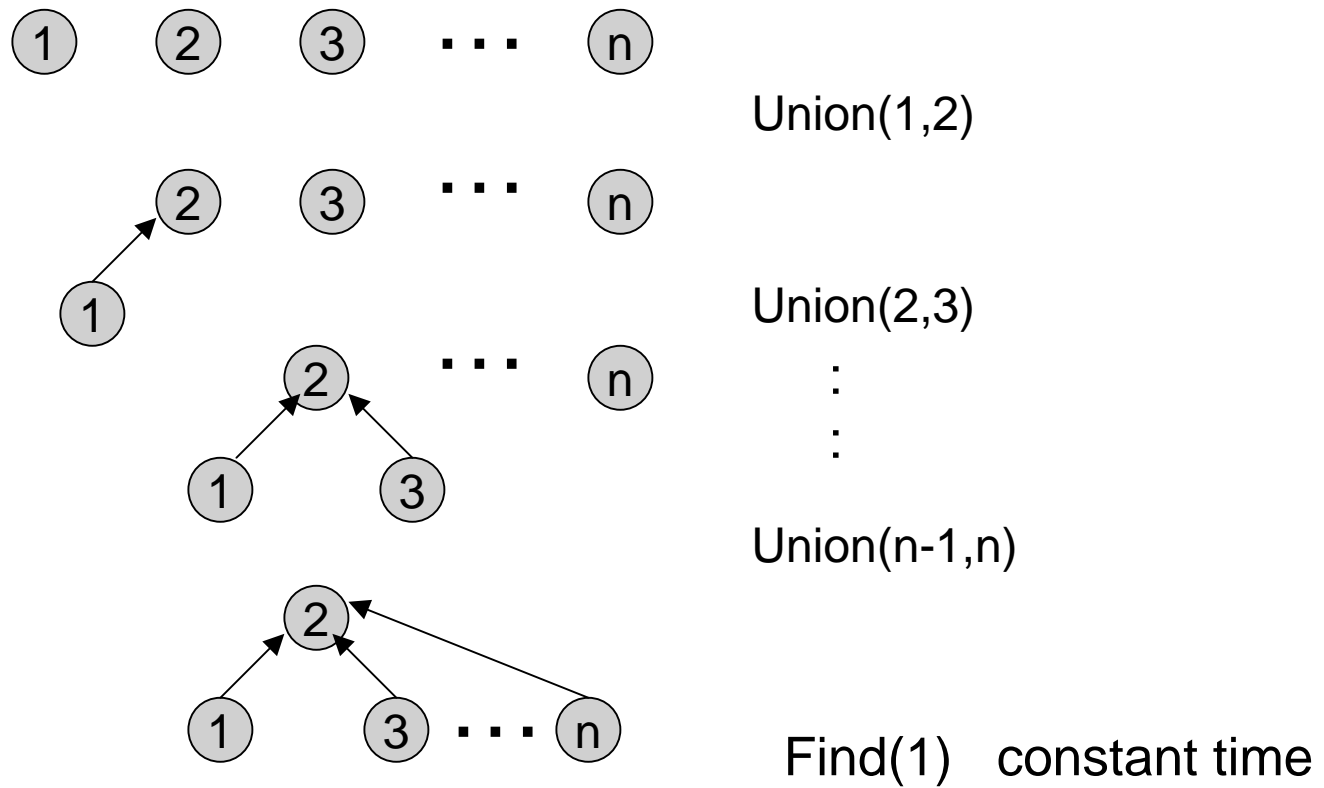

Analysis of Weighted Union

- With weighted union an up-tree of height h has weight at least 2^h .
- Proof by induction
 - › Basis: $h = 0$. The up-tree has one node, $2^0 = 1$
 - › Inductive step: Assume true for all $h' < h$.

Minimum weight up-tree of height h formed by weighted unions

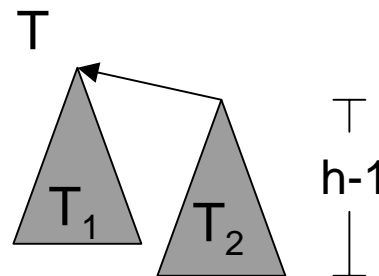

$$W(T_1) \geq W(T_2) \geq 2^{h-1}$$

↑
↑
 Weighted union Induction hypothesis


$$W(T) \geq 2^{h-1} + 2^{h-1} = 2^h$$

Analysis of Weighted Union


- Let T be an up-tree of weight n formed by weighted union. Let h be its height.
- $n \geq 2^h$
- $\log_2 n \geq h$
- Find(x) in tree T takes $O(\log n)$ time.
- Can we do better?

Worst Case for Weighted Union


$n/2$ Weighted Unions

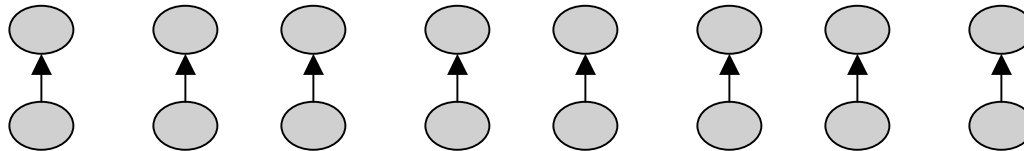

$n/4$ Weighted Unions

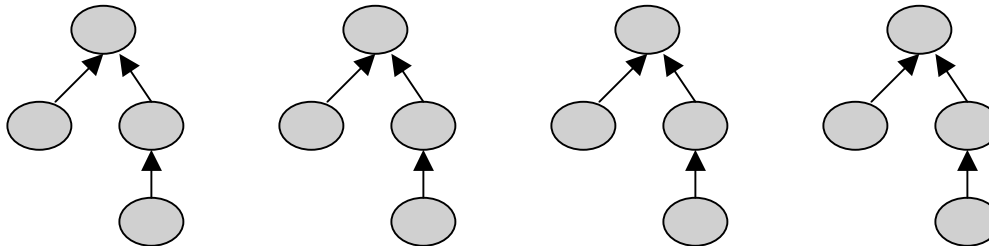

Elegant Array Implementation

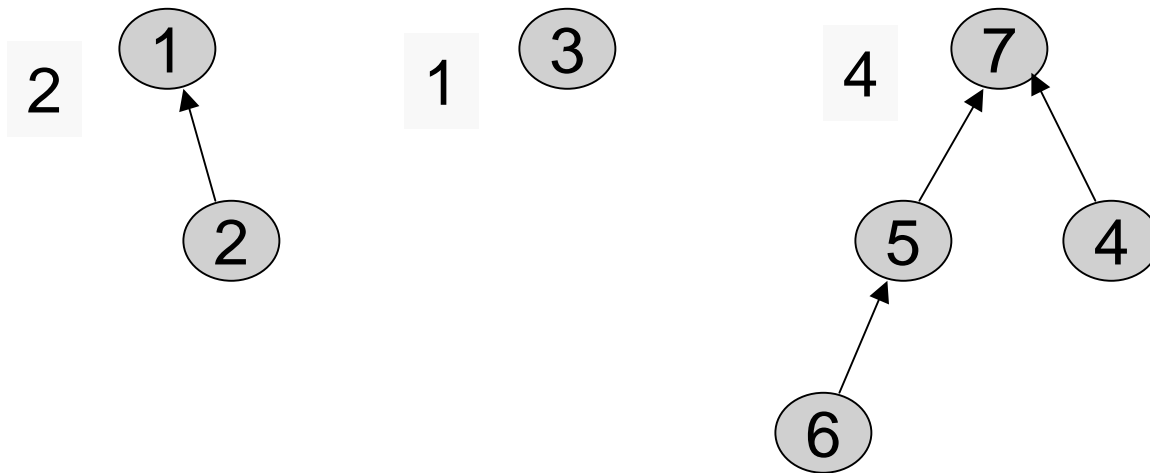

	1	2	3	4	5	6	7
up	0	1	0	7	7	5	0
weight	2		1				4


Can save the extra space by storing the complement of weight in the space reserved for the root

Weighted Union


```
W-Union(i, j : index) {
  //i and j are roots//
  wi := weight[i];
  wj := weight[j];
  if wi < wj then
    up[i] := j;
    weight[j] := wi + wj;
  else
    up[j] := i;
    weight[i] := wi + wj;
}
```

Path Compression

- On a Find operation point all the nodes on the search path directly to the root.

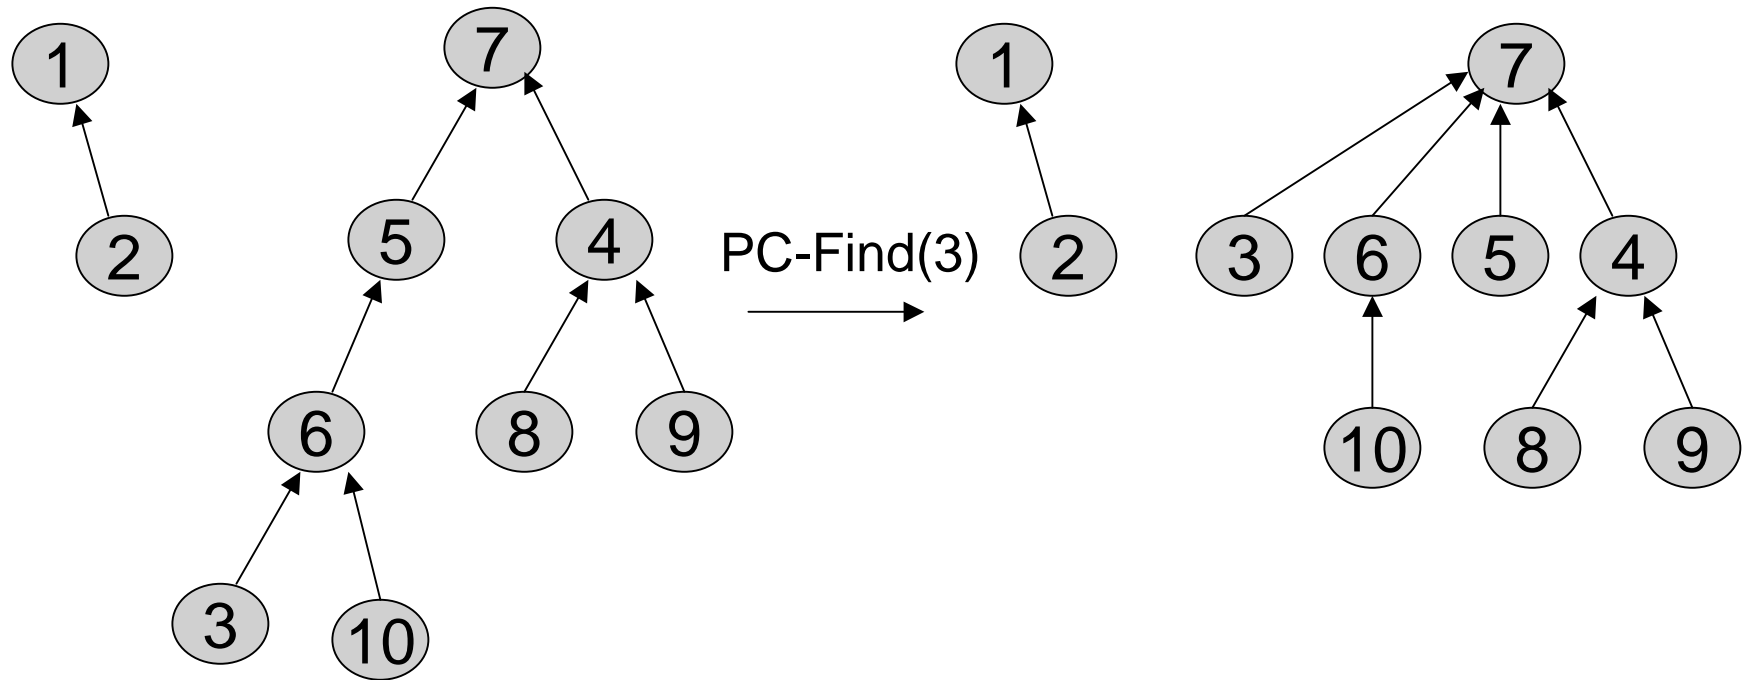


Self-Adjustment Works

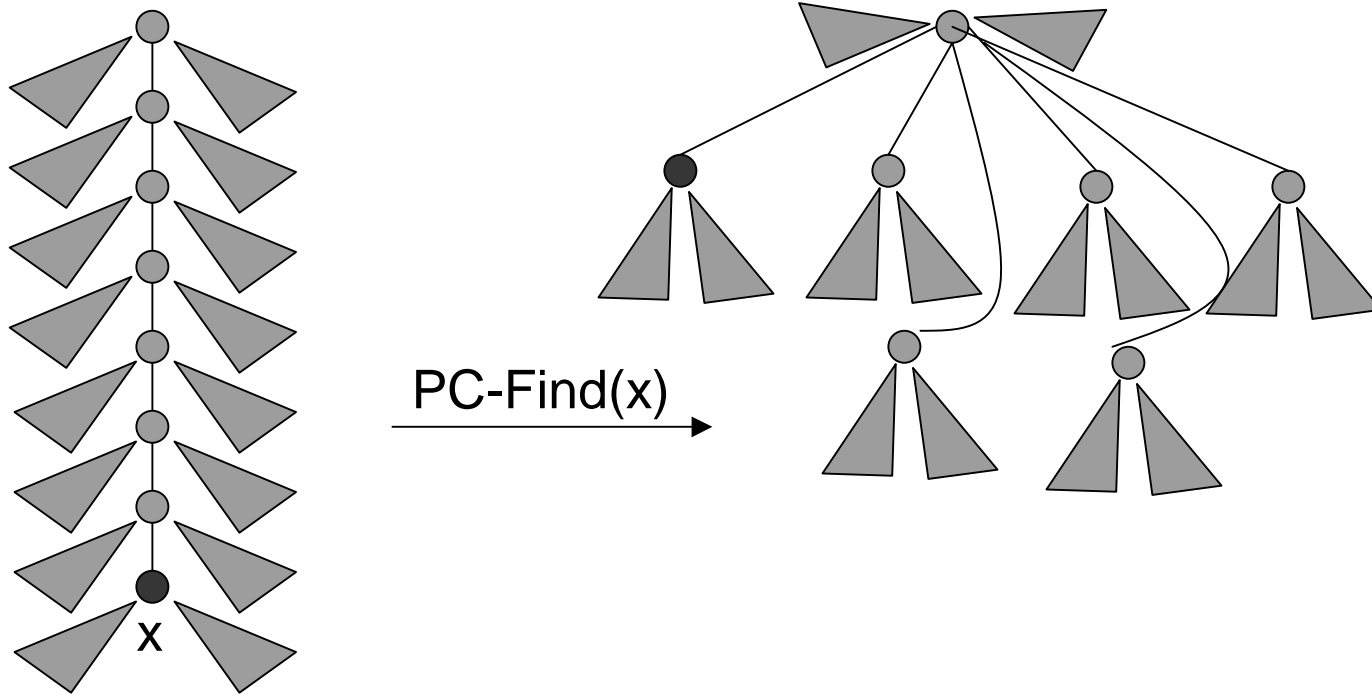

Path Compression Find

```
PC-Find(i : index) {
  r := i;
  while up[r] ≠ 0 do //find root//
    r := up[r];
  if i ≠ r then //compress path//
    k := up[i];
    while k ≠ r do
      up[i] := r;
      i := k;
      k := up[k]
  return(r)
}
```

Example

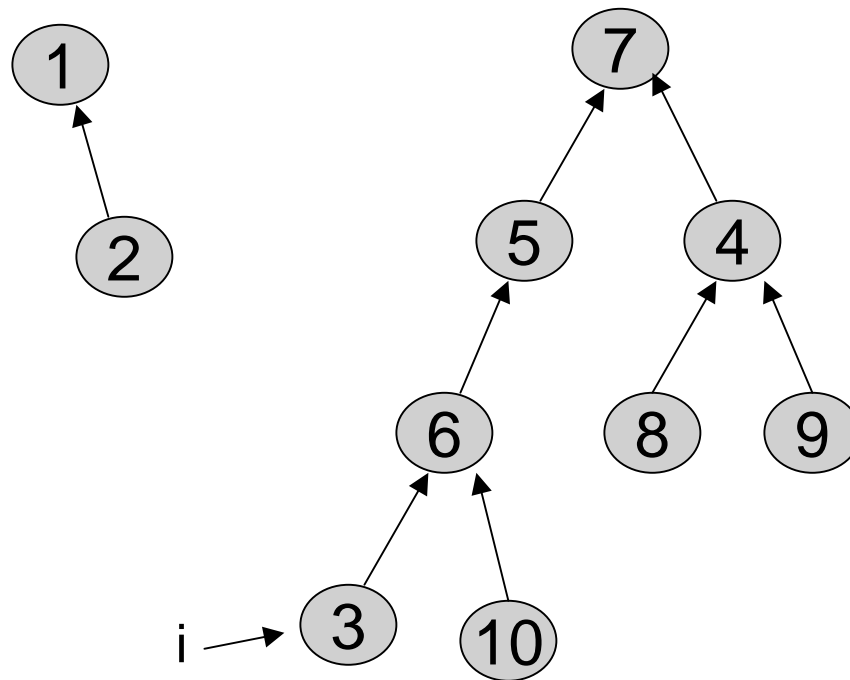

Disjoint Union / Find with Weighted Union and PC

- Worst case time complexity for a W-Union is $O(1)$ and for a PC-Find is $O(\log n)$.
- Time complexity for $m \geq n$ operations on n elements is $O(m \log^* n)$ where $\log^* n$ is a very slow growing function.
 - › $\log^* n < 7$ for all reasonable n . Essentially constant time per operation!

Amortized Complexity

- For disjoint union / find with weighted union and path compression.
 - › average time per operation is essentially a constant.
 - › worst case time for a PC-Find is $O(\log n)$.
- An individual operation can be costly, but over time the average cost per operation is not.

Find Solutions

Recursive

```
Find(up[] : integer array, x : integer) : integer {  
  //precondition: x is in the range 1 to size//  
  if up[x] = 0 then return x  
  else return Find(up, up[x]);  
}
```

Iterative

```
Find(up[] : integer array, x : integer) : integer {  
  //precondition: x is in the range 1 to size//  
  while up[x] ≠ 0 do  
    x := up[x];  
  return x;  
}
```