

CSE 373: Heaps
(other operations and variations)

Chapter 6



Heaps: Quick Recap



Heaps:

- structure is a complete binary tree
- each node must be smaller than its descendants



- main operations are `Insert()` and `DeleteMin()`
- heaps have an compact array-based representation

Other Operations: `DecreaseKey()`

`DecreaseKey()` – lowers a node's value
(while preserving heap ordering)

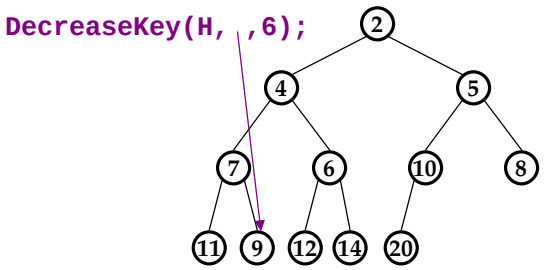

`DecreaseKey()` – Continued

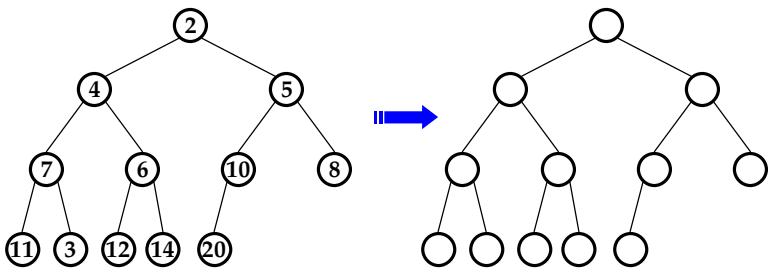

running time?

IncreaseKey()



IncreaseKey() – raises a node's value

```
IncreaseKey(H, 6);
```

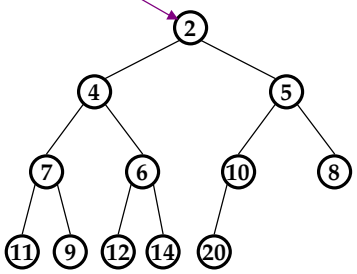

IncreaseKey() – Continued

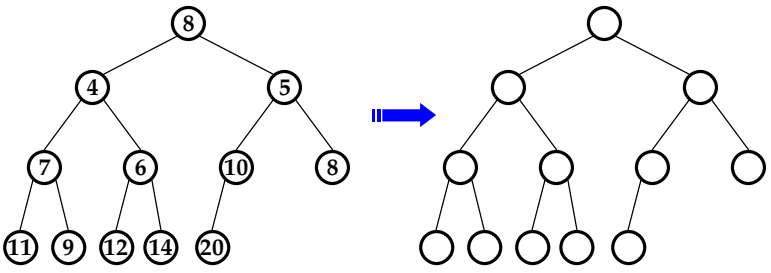

running time?

Delete()



Delete() – removes a node from the heap

```
Delete(H, 6);
```

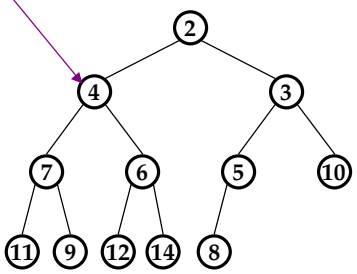

Delete() – Continued

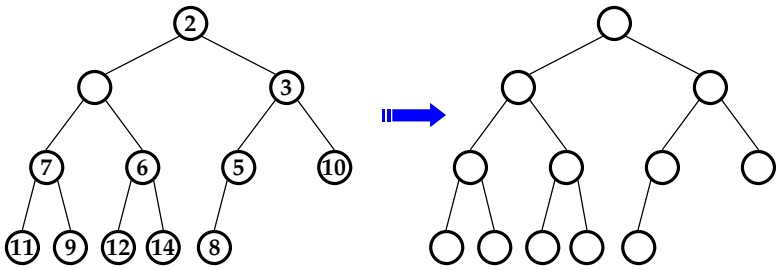

running time?

Let's Write a Heap Routine…



`BuildHeap()`

`BuildHeap()` – creates a heap from an array

12	5	11	3	10	6	9	4	8	1	7	2

Straightforward Implementation: **`Insert()`**
elements into an empty heap one at a time

running time?

`BuildHeap()` – Continued

Better Implementation: Treat input array as a heap and "percolate down" first $n/2$ values

12	5	11	3	10	6	9	4	8	1	7	2

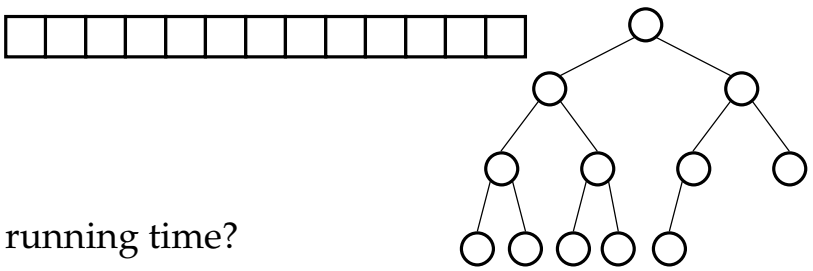

running time?

`BuildHeap()` – even more

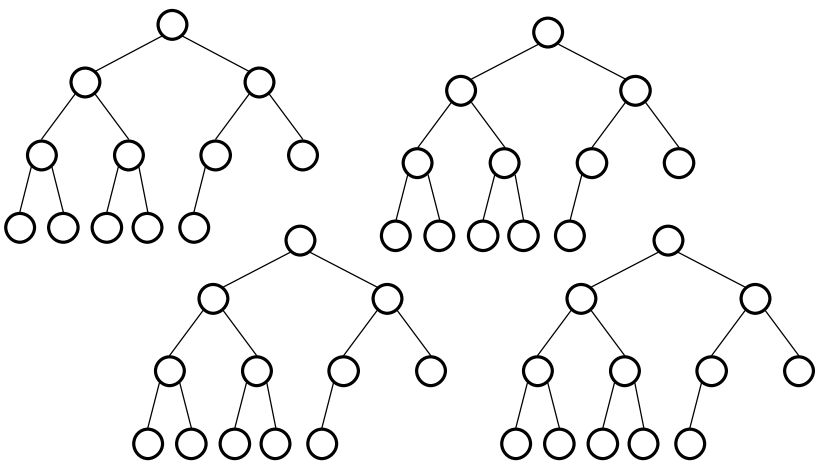

`BuildHeap()` running time



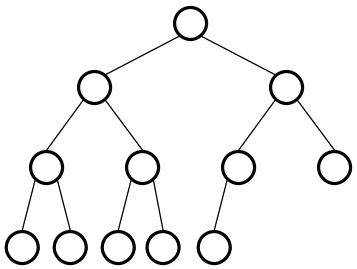

MaxHeaps

MaxHeaps: the dual of the Heaps we've defined

- support fast `Insert()` and `DeleteMax()` ops
- work exactly the same as (Min)Heaps

Why is `DeleteMax()` expensive on a normal heap?

What's the running time?

d-Heaps

d-Heaps: Just like normal heaps but with *d* children rather than 2

Intuition: tree will be shallower so ops will be faster

However…

- more comparisons need to be made when percolating down
- if *d* not a power of 2, finding parent/children will be slower

What about asymptotic running time?

Bottom Line: 4-heaps ***may*** outperform 2-heaps

Merging Heaps

How to merge heaps effectively?

Straightforward method: copy both arrays into a single array and use `BuildHeap()`

running time?

Advanced methods:

- pointer-based imbalanced heaps
  - *leftist heaps* – a bit like AVL trees; O(log *n*) merge
  - *skew heaps* – like Splay trees; O(log *n*) amortized ops
  - *binomial queues* – O(log *n*) merge, but ~O(1) insert