

Introduction to Database Systems


CSE 414

Lecture 25: Introduction to Transactions

Class Overview

- Unit 1: Intro
- Unit 2: Relational Data Models and Query Languages
- Unit 3: Non-relational data
- Unit 4: RDMBS internals and query optimization
- Unit 5: Parallel query processing
- Unit 6: DBMS usability, conceptual design
- Unit 7: Transactions
 - Locking and schedules
 - Writing DB applications
- Unit 8: Advanced topics

Data Management Pipeline

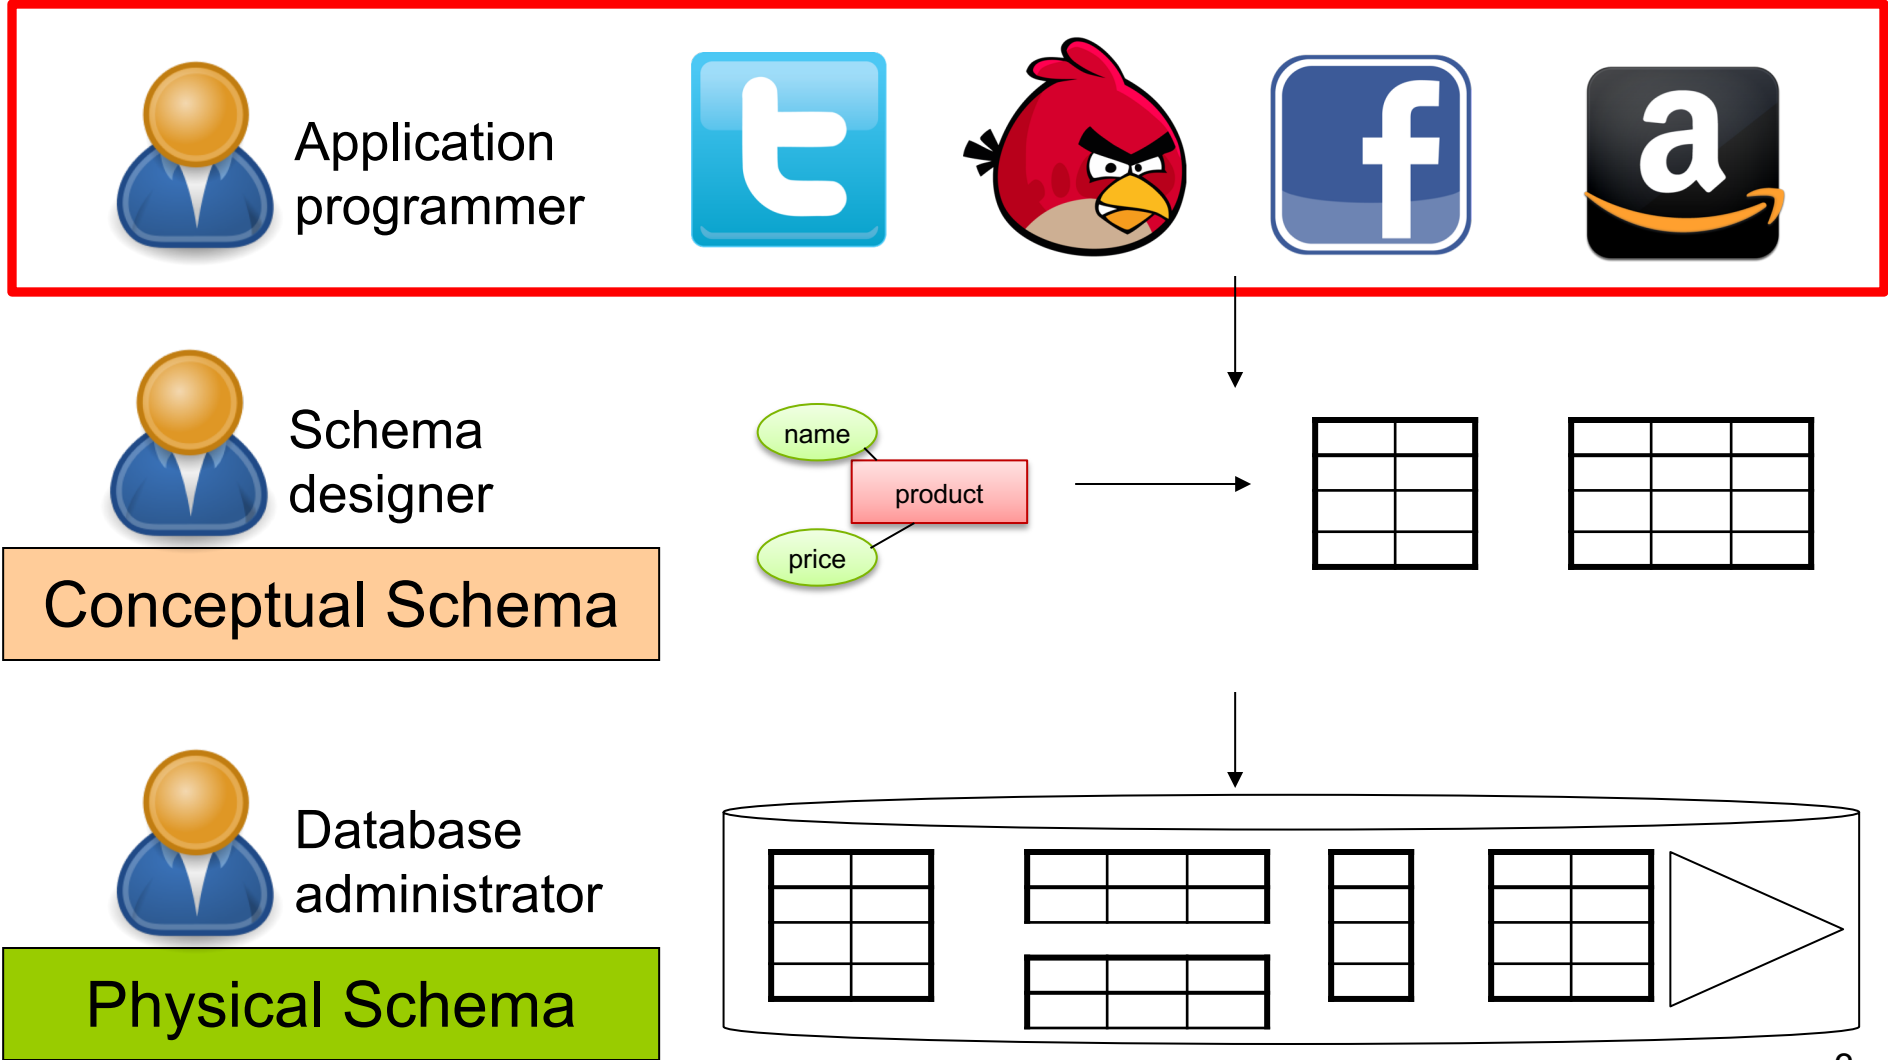

Transactions

- We use database transactions everyday
 - Bank \$\$\$ transfers
 - Online shopping
 - Signing up for classes
- For this class, a transaction is a series of DB queries
 - Read / Write / Update / Delete / Insert
 - Unit of work issued by a user that is independent from others

What's the big deal?

Challenges

- Want to execute many apps concurrently
 - All these apps read and write data to the same DB
- Simple solution: only serve one app at a time
 - What's the problem?
- **Want: multiple operations to be executed *atomically* over the same DBMS**

What can go wrong?

- Manager: balance budgets among projects
 - Remove \$10k from project A
 - – Add \$7k to project B
 - – Add \$3k to project C
- CEO: check company's total balance
 - `SELECT SUM(money) FROM budget;`
- This is called a dirty / inconsistent read
aka a **WRITE-READ** conflict

What can go wrong?

- App 1:
`SELECT inventory FROM products WHERE pid = 1`
- App 2:
`UPDATE products SET inventory = 0 WHERE pid = 1`
- App 1:
`SELECT inventory * price FROM products
WHERE pid = 1`
- This is known as an unrepeatable read
aka **READ-WRITE** conflict

What can go wrong?

Account 1 = \$100

Account 2 = \$100


Total = \$200

- App 1:
 - Set Account 1 = \$200
 - Set Account 2 = \$0
- App 2:
 - Set Account 2 = \$200
 - Set Account 1 = \$0
- At the end:
 - Total = \$200
- App 1: Set Account 1 = \$200
- App 2: Set Account 2 = \$200
- App 1: Set Account 2 = \$0
- App 2: Set Account 1 = \$0
- At the end:
 - Total = \$0

This is called the lost update aka **WRITE-WRITE** conflict

What can go wrong?

- Buying tickets to the next Bieber concert:
 - Fill up form with your mailing address
 - Put in debit card number
 - Click submit
 - Screen shows money deducted from your account
 - [Your browser crashes]

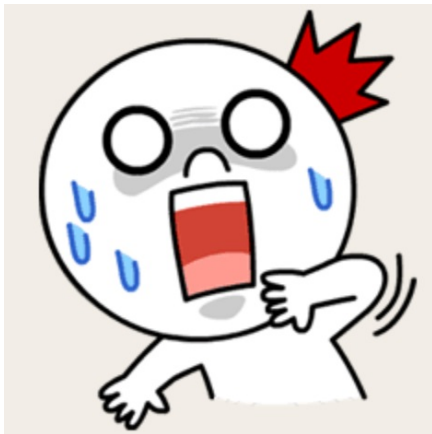

Lesson:

Changes to the database
should be **ALL or NOTHING**

Transactions

- Collection of statements that are executed atomically (logically speaking)

```
BEGIN TRANSACTION  
  [SQL statements]  
COMMIT      or  
ROLLBACK (=ABORT)
```

```
[single SQL statement]
```


If BEGIN... missing,
then TXN consists
of a single instruction

Transactions Demo

Turing Awards in Data Management



Charles Bachman, 1973
IDS and CODASYL



Ted Codd, 1981
Relational model



Jim Gray, 1998
Transaction processing



Michael Stonebraker, 2014
INGRES and Postgres



Know your ~~chemistry~~ transactions: ACID

- **Atomic**
 - State shows either all the effects of txn, or none of them
- **Consistent**
 - Txn moves from a DBMS state where integrity holds, to another where integrity holds
 - remember integrity constraints?
- **Isolated**
 - Effect of txns is the same as txns running one after another (i.e., looks like batch mode)
- **Durable**
 - Once a txn has committed, its effects remain in the database

Atomic

- **Definition:** A transaction is ATOMIC if all its updates must happen or not at all.
- **Example:** move \$100 from A to B
 - UPDATE accounts SET bal = bal - 100
WHERE acct = A;
 - UPDATE accounts SET bal = bal + 100
WHERE acct = B;
 - BEGIN TRANSACTION;
UPDATE accounts SET bal = bal - 100
WHERE acct = A;
UPDATE accounts SET bal = bal + 100
WHERE acct = B;
COMMIT;

I solated

- **Definition** An execution ensures that txns are isolated, if the effect of each txn is as if it were the only txn running on the system.

Consistent

- Recall: integrity constraints govern how values in tables are related to each other
 - Can be enforced by the DBMS, or ensured by the app
- How consistency is achieved by the app:
 - App programmer ensures that txns only takes a consistent DB state to another consistent state
 - DB makes sure that txns are executed atomically
- Can defer checking the validity of constraints until the end of a transaction

Durable

- A transaction is durable if its effects continue to exist after the transaction and even after the program has terminated
- How?
 - By writing to disk!
 - More in CSE 444

Rollback transactions

- If the app gets to a state where it cannot complete the transaction successfully, execute ROLLBACK
- The DB returns to the state prior to the transaction
- What are examples of such program states?

ACID

- Atomic
 - Consistent
 - Isolated
 - Durable
-
- Enjoy this in HW8!
-
- Again: by default each statement is its own txn
 - Unless auto-commit is off then each statement starts a new txn

Transaction Schedules

Schedules

A **schedule** is a sequence of interleaved actions from all transactions

Serial Schedule


- A serial schedule is one in which transactions are executed one after the other, in some sequential order
- **Fact:** nothing can go wrong if the system executes transactions serially
 - (up to what we have learned so far)
 - But DBMS don't do that because we want better overall system performance

Example


A and B are elements
in the database
t and s are variables
in txn source code

T1	T2
READ(A, t)	READ(A, s)
t := t+100	s := s*2
WRITE(A, t)	WRITE(A,s)
READ(B, t)	READ(B,s)
t := t+100	s := s*2
WRITE(B,t)	WRITE(B,s)

Example of a (Serial) Schedule

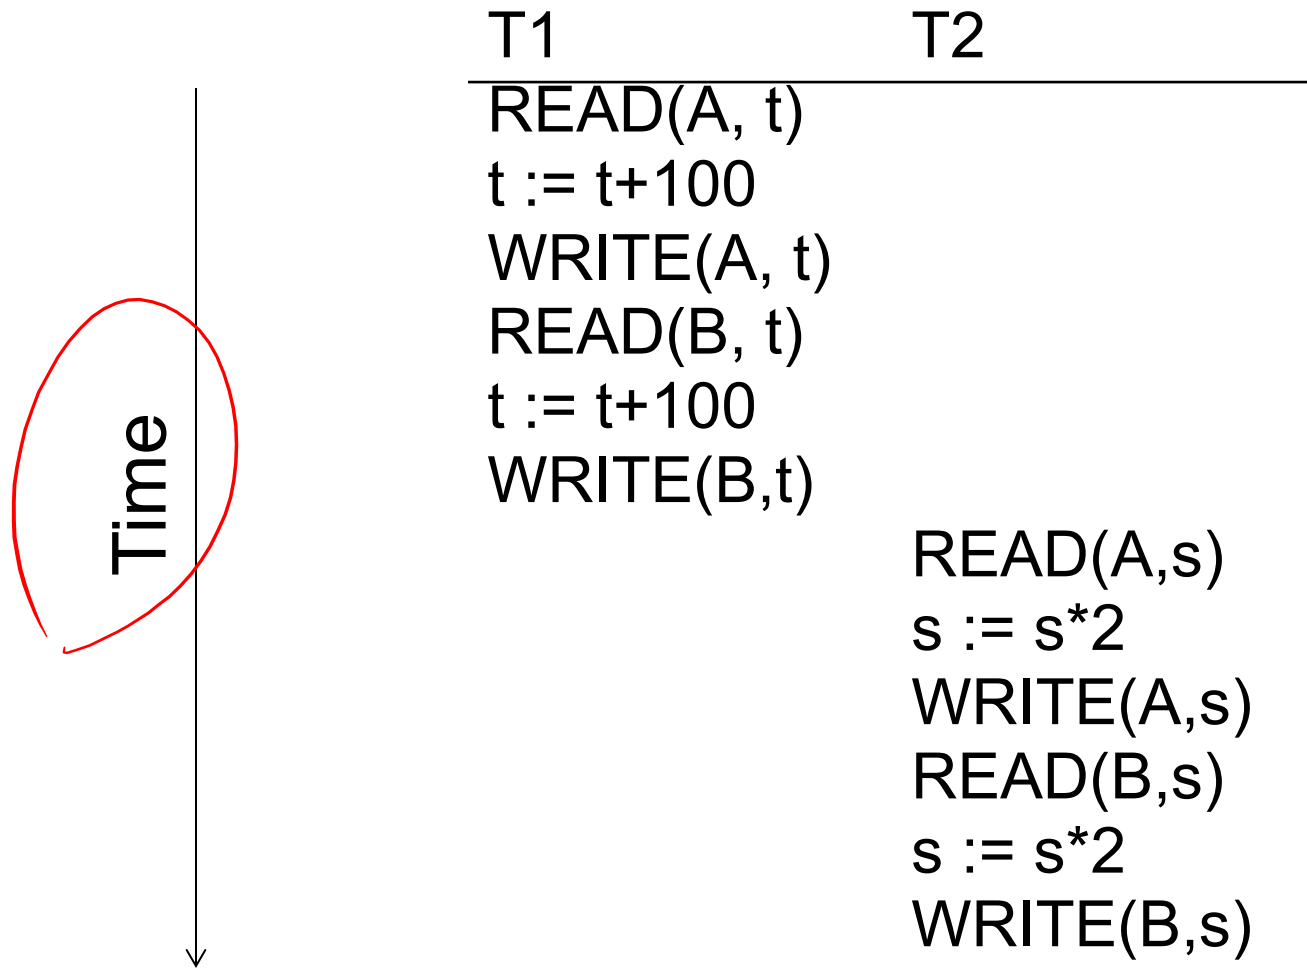

Another Serial Schedule

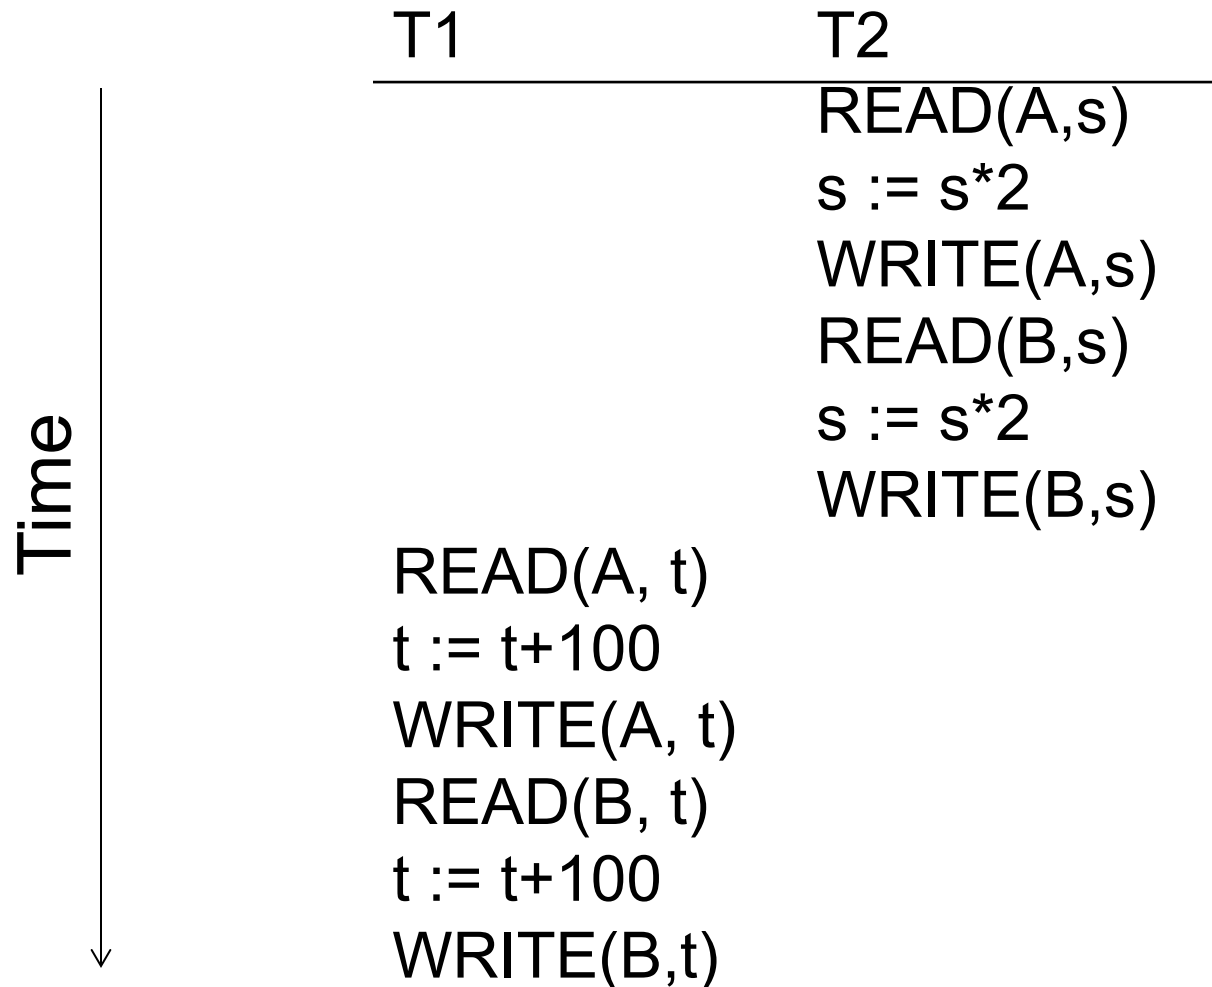

Review: Serializable Schedule

A schedule is **serializable** if it is equivalent to a serial schedule

A Serializable Schedule

T1

READ(A, t)

t := t+100

WRITE(A, t)

READ(B, t)

t := t+100

WRITE(B,t)

T2

READ(A,s)


s := s*2

WRITE(A,s)

READ(B,s)

s := s*2

WRITE(B,s)

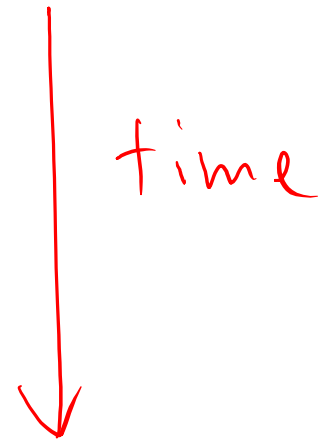

This is a **serializable** schedule.
This is NOT a serial schedule

A Non-Serializable Schedule

T1	T2
READ(A, t)	
t := t+100	
WRITE(A, t)	
	READ(A,s)
	s := s*2
	WRITE(A,s)
	READ(B,s)
	s := s*2
	WRITE(B,s)
READ(B, t)	
t := t+100	
WRITE(B,t)	

How do We Know if a Schedule is Serializable?

Notation:

$T_1: r_1(A); w_1(A); r_1(B); w_1(B)$
 $T_2: r_2(A); w_2(A); r_2(B); w_2(B)$

Key Idea: Focus on *conflicting* operations

Conflicts

- Write-Read – WR
- Read-Write – RW
- Write-Write – WW
- Read-Read?

Conflict Serializability

Conflicts: (i.e., swapping will change program behavior)

Two actions by same transaction T_i :

$r_i(X); w_i(Y)$

Two writes by T_i, T_j to same element

$w_i(X); w_j(X)$

Read/write by T_i, T_j to same element

$w_i(X); r_j(X)$

$r_i(X); w_j(X)$

Conflict Serializability

- A schedule is *conflict serializable* if it can be transformed into a serial schedule by a series of swappings of adjacent non-conflicting actions
- Every conflict-serializable schedule is serializable
- The converse is not true (why?)

Conflict Serializability

Example:

$r_1(A); w_1(A); r_2(A); w_2(A); r_1(B); w_1(B); r_2(B); w_2(B)$

Conflict Serializability

Example:

$r_1(A); w_1(A); r_2(A); w_2(A); r_1(B); w_1(B); r_2(B); w_2(B)$



$r_1(A); w_1(A); r_1(B); w_1(B); r_2(A); w_2(A); r_2(B); w_2(B)$

Conflict Serializability

Example:

$r_1(A); w_1(A); r_2(A); w_2(A); r_1(B); w_1(B); r_2(B); w_2(B)$



$r_1(A); w_1(A); r_1(B); w_1(B); r_2(A); w_2(A); r_2(B); w_2(B)$

Conflict Serializability

Example:

$r_1(A); w_1(A); r_2(A); w_2(A); r_1(B); w_1(B); r_2(B); w_2(B)$




$r_1(A); w_1(A); r_2(A); r_1(B); w_2(A); w_1(B); r_2(B); w_2(B)$



$r_1(A); w_1(A); r_1(B); w_1(B); r_2(A); w_2(A); r_2(B); w_2(B)$

Conflict Serializability

Example:

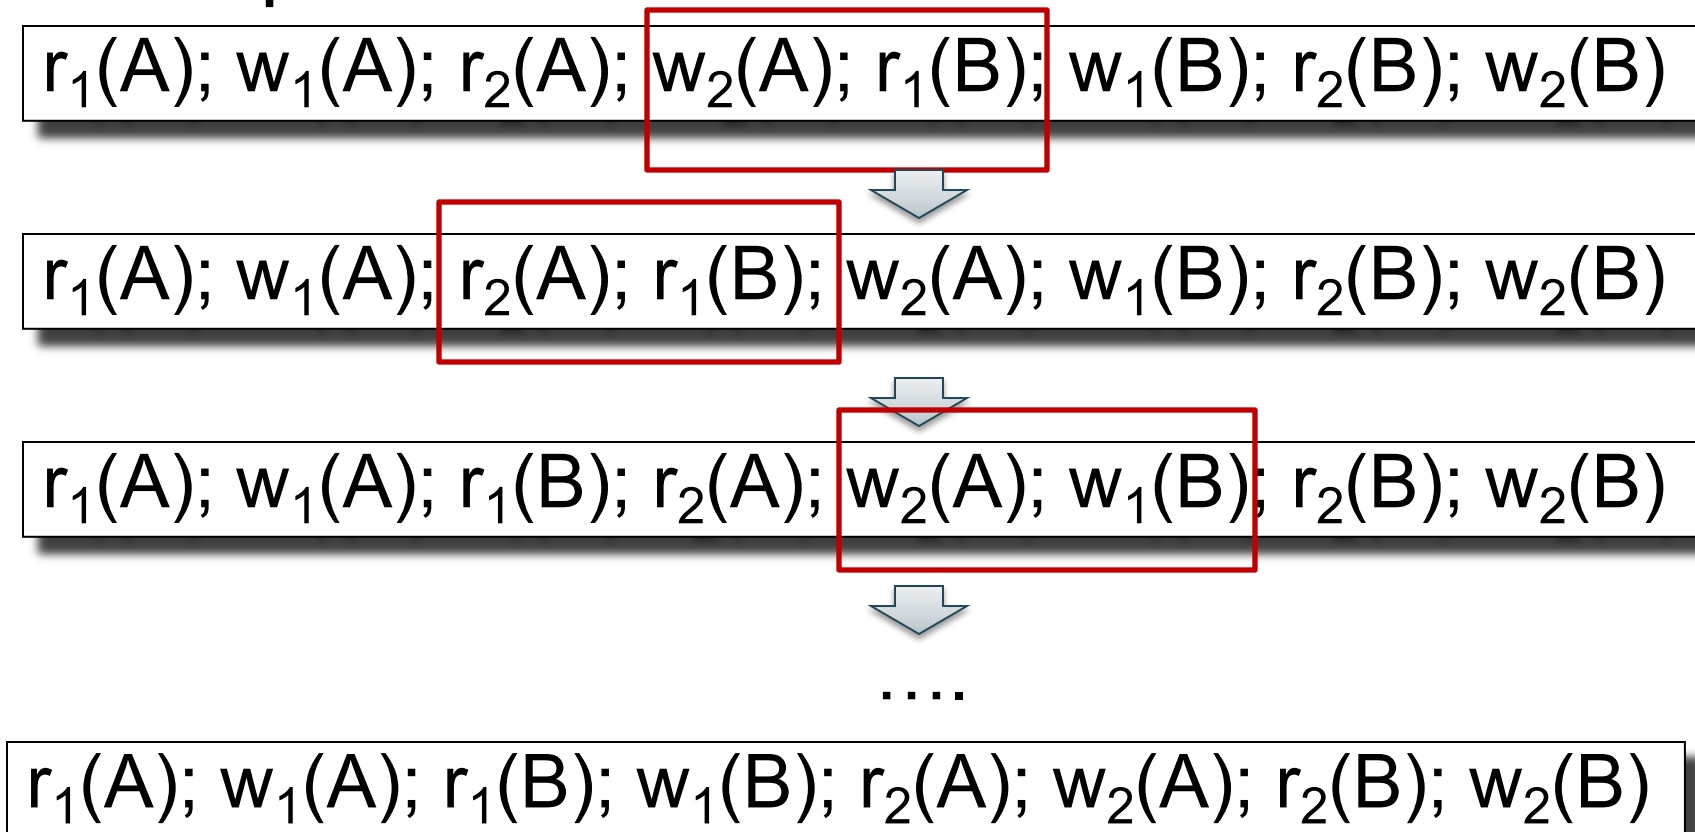

Testing for Conflict-Serializability

Precedence graph:

- A node for each transaction T_i ,
- An edge from T_i to T_j whenever an action in T_i conflicts with, and comes before an action in T_j
- The schedule is conflict-serializable iff the precedence graph is acyclic

Example 1

$r_2(A); r_1(B); w_2(A); r_3(A); w_1(B); w_3(A); r_2(B); w_2(B)$


①

②

③

Example 1

$r_2(A); r_1(B); w_2(A); r_3(A); w_1(B); w_3(A); r_2(B); w_2(B)$



This schedule is **conflict-serializable**

Example 2


$r_2(A); r_1(B); w_2(A); r_2(B); r_3(A); w_1(B); w_3(A); w_2(B)$

①

②

③

Example 2

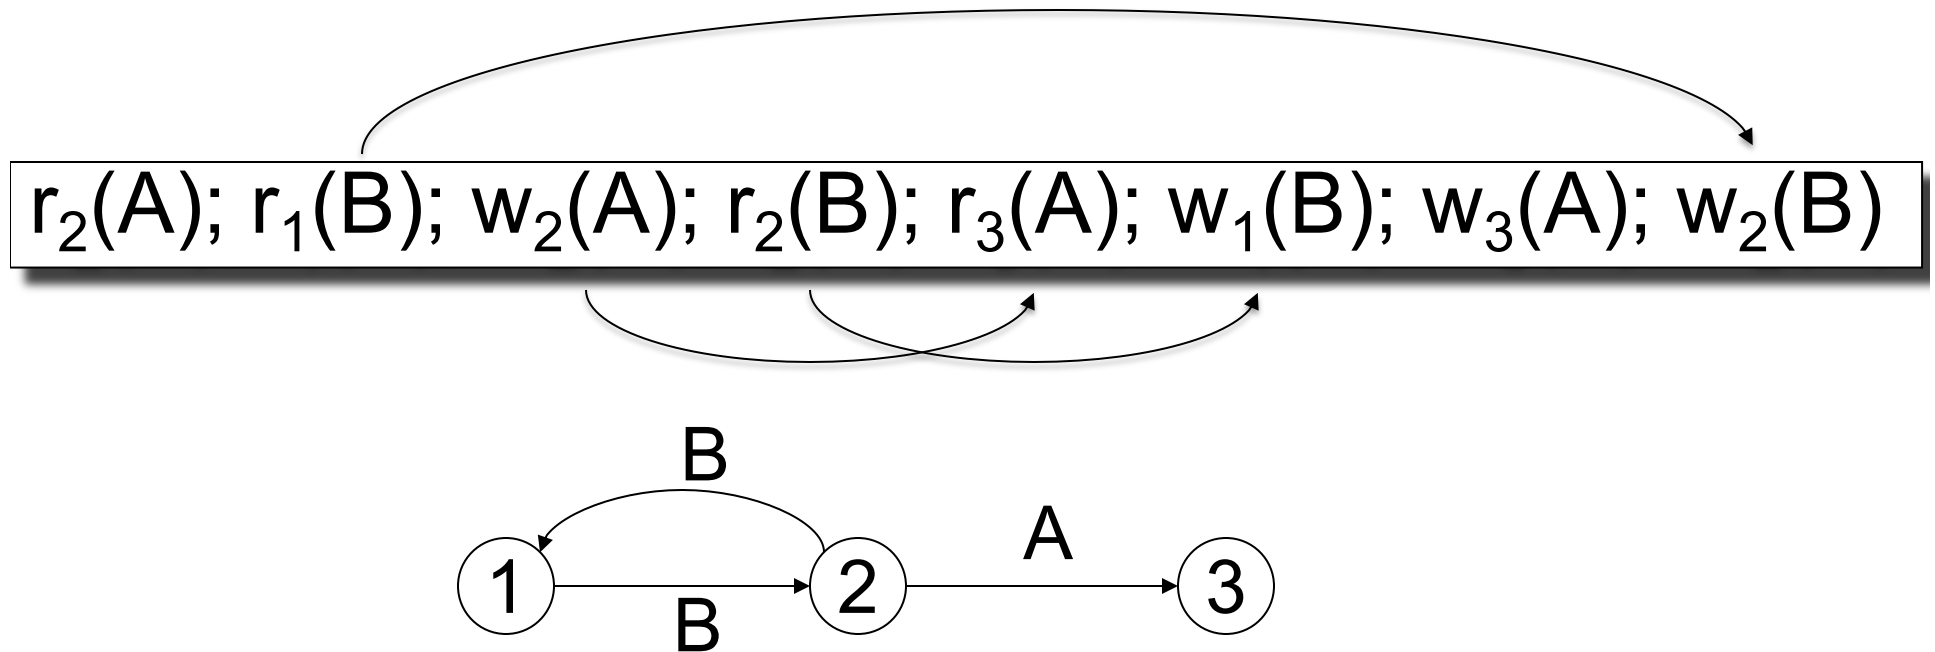

This schedule **is NOT conflict-serializable**