

CSE 417

Algorithms and Complexity

Autumn 2020

Lecture 15

Recurrences

Announcements

- Homework 5, Due Friday

Divide and Conquer - MergeSort

```
Array Mergesort(Array a){
    n = a.Length;
    if (n <= 1)
        return a;
    b = Mergesort(a[0 .. n/2]);
    c = Mergesort(a[n/2+1 .. n-1]);
    return Merge(b, c);
}
```

Analysis: Cost of Merge, Cost of Mergesort

$$MS(n) = MS(n/2) + n; \quad MS(1) = 1;$$

Solution: $MS(n) = n (\log_2 n + 1)$

A better mergesort (?)

- Divide into 3 subarrays and recursively sort
- Apply 3-way merge

What is the recurrence?

Unroll recurrence for $T(n) = 3T(n/3) + n$

$$T(n) = aT(n/b) + f(n)$$

$$T(n) = T(n/2) + cn$$

Where does this recurrence arise?


Solving the recurrence exactly

Total Work


$\log n$

$$\sum_{k=0} 2^k n = (2n - 1)n$$


$$T(n) = 4T(n/2) + n$$

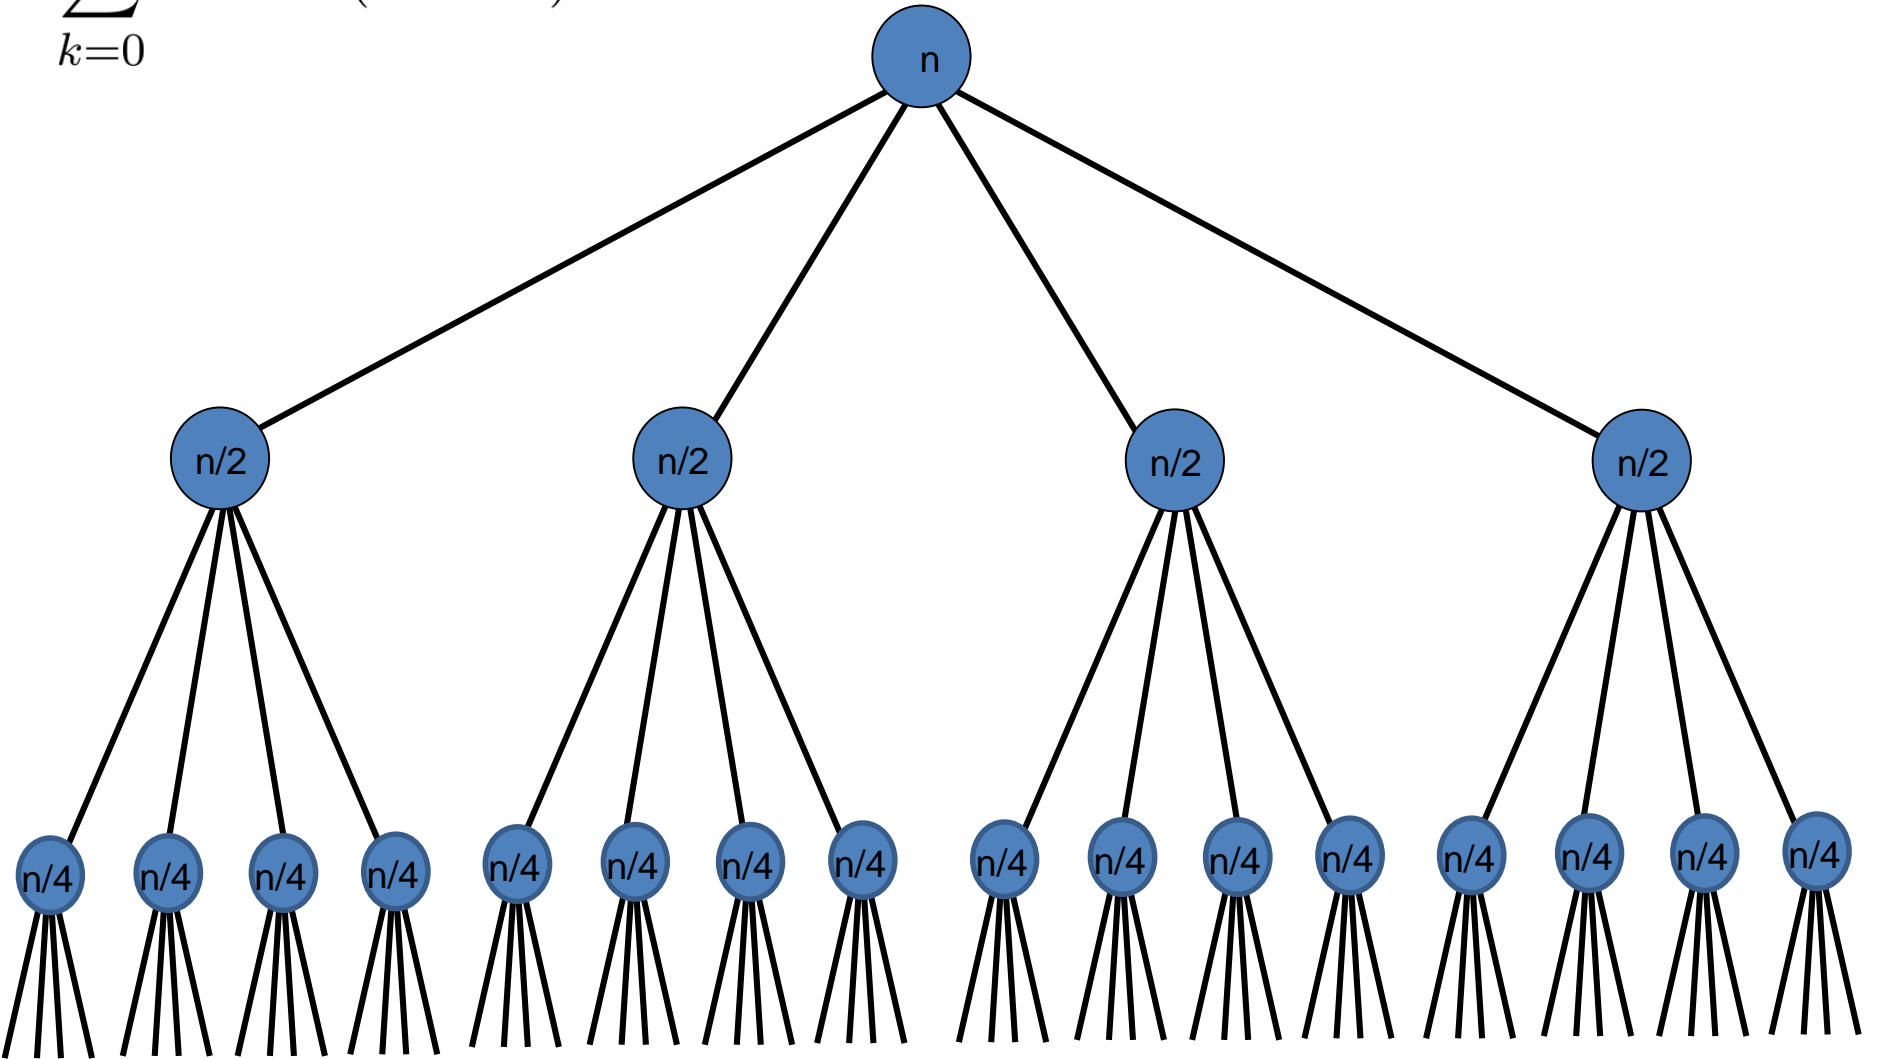

$$T(n) = 2T(n/2) + n^2$$

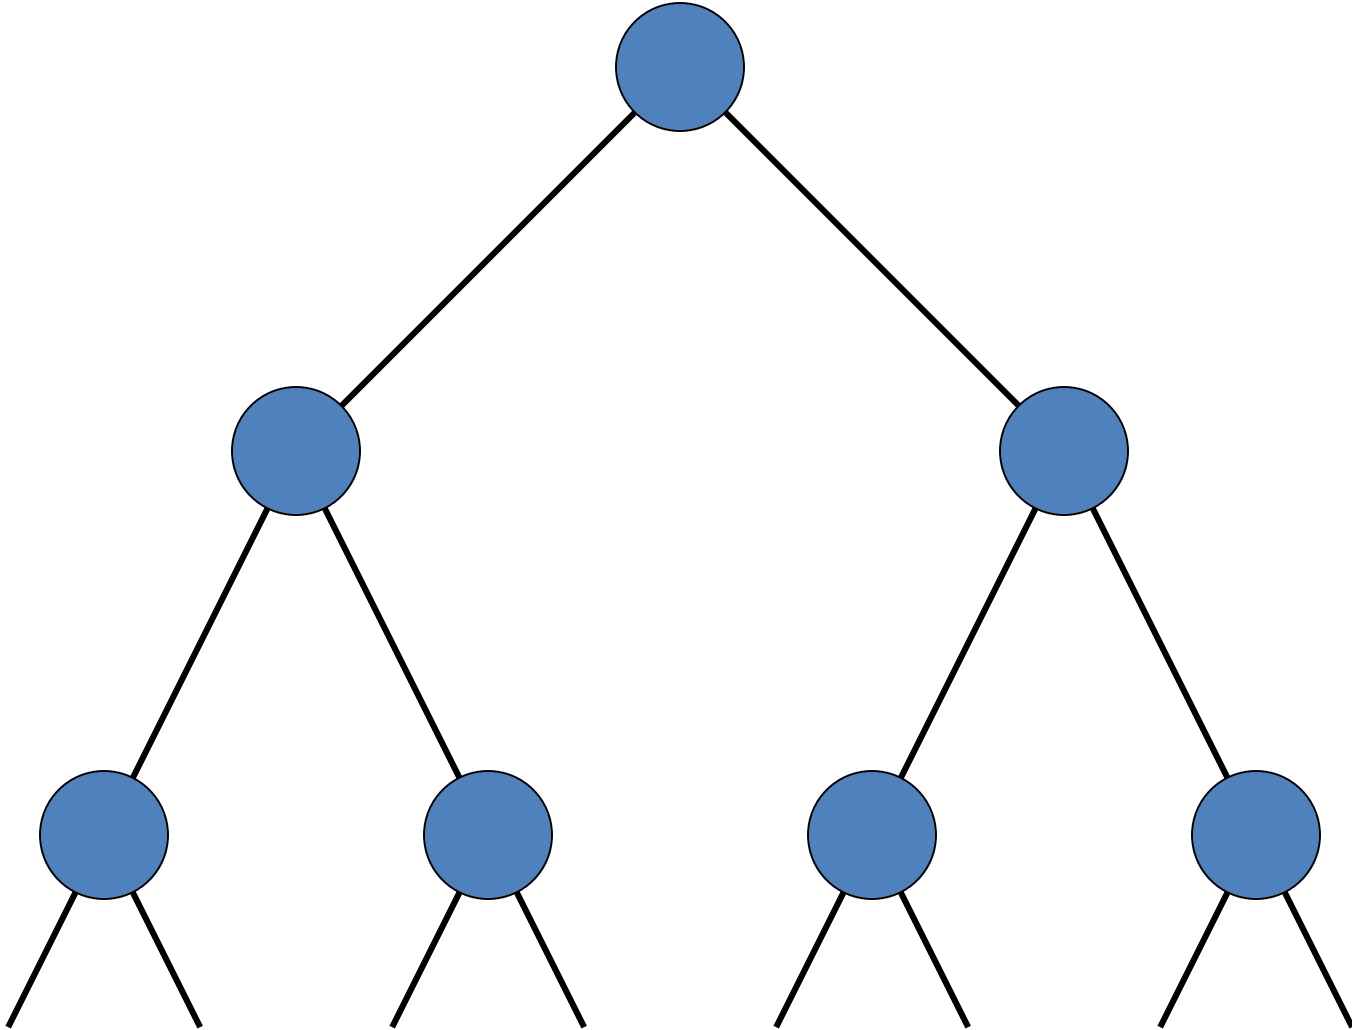

$$T(n) = 2T(n/2) + n^{1/2}$$

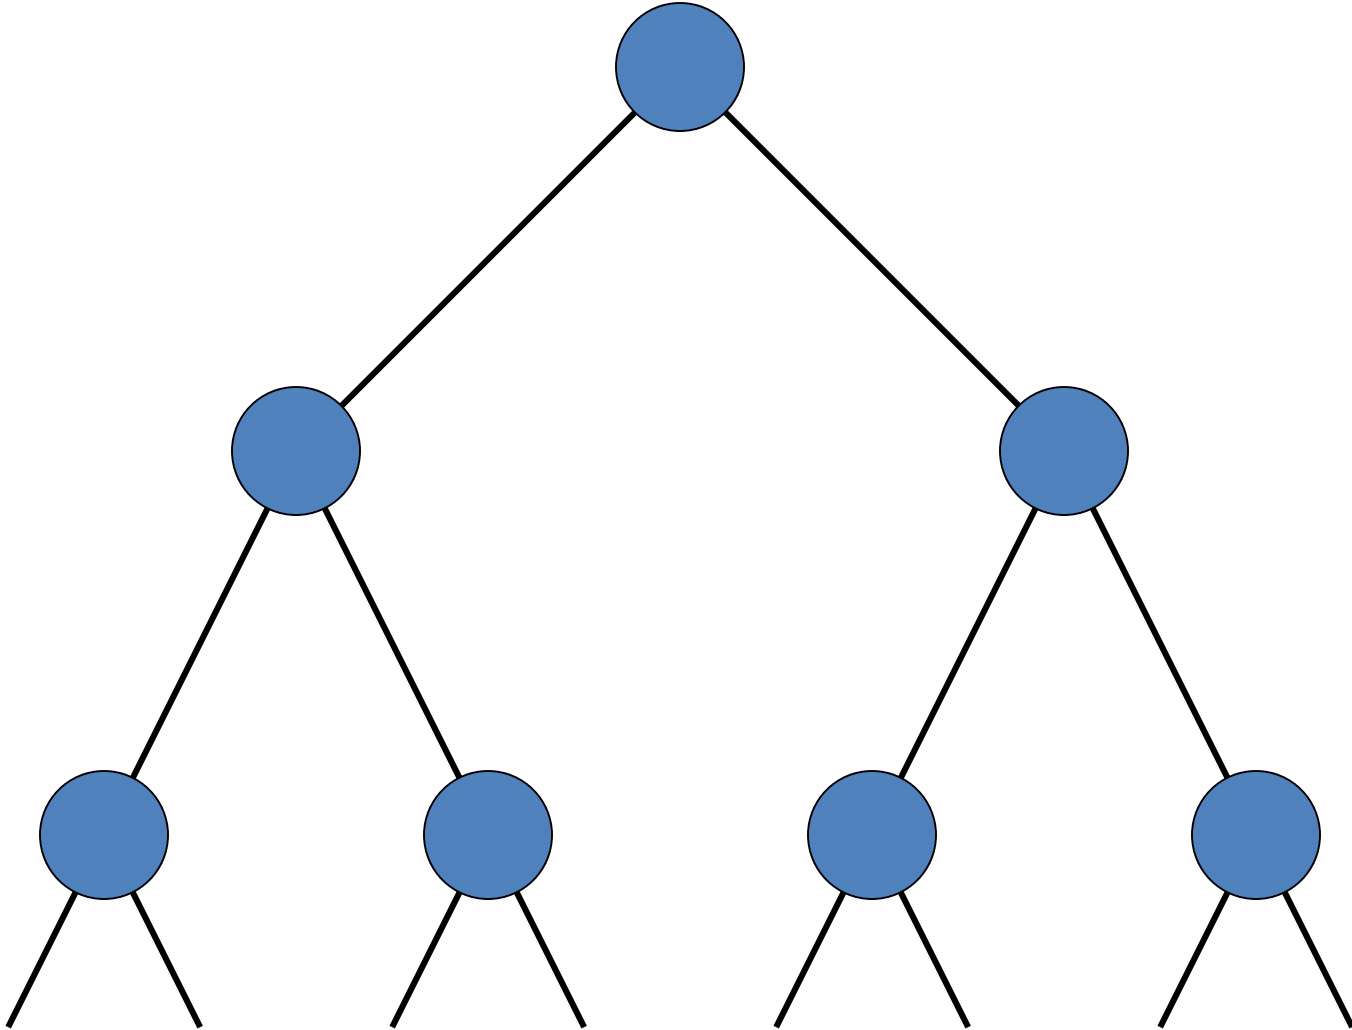

Recurrences

- Three basic behaviors
 - Dominated by initial case
 - Dominated by base case
 - All cases equal – we care about the depth

What you really need to know about recurrences

- Work per level changes geometrically with the level
- Geometrically increasing ($x > 1$)
 - The bottom level wins
- Geometrically decreasing ($x < 1$)
 - The top level wins
- Balanced ($x = 1$)
 - Equal contribution

Classify the following recurrences (Increasing, Decreasing, Balanced)

- $T(n) = n + 5T(n/8)$
- $T(n) = n + 9T(n/8)$
- $T(n) = n^2 + 4T(n/2)$
- $T(n) = n^3 + 7T(n/2)$
- $T(n) = n^{1/2} + 3T(n/4)$

Recursive Matrix Multiplication

Multiply 2 x 2 Matrices:

$$\begin{vmatrix} r & s \\ t & u \end{vmatrix} = \begin{vmatrix} a & b \\ c & d \end{vmatrix} \begin{vmatrix} e & g \\ f & h \end{vmatrix}$$

$$r = ae + bf$$

$$s = ag + bh$$

$$t = ce + df$$

$$u = cg + dh$$

A $N \times N$ matrix can be viewed as a 2×2 matrix with entries that are $(N/2) \times (N/2)$ matrices.

The recursive matrix multiplication algorithm recursively multiplies the $(N/2) \times (N/2)$ matrices and combines them using the equations for multiplying 2×2 matrices

Recursive Matrix Multiplication

- How many recursive calls are made at each level?
- How much work in combining the results?
- What is the recurrence?

What is the run time for the recursive Matrix Multiplication Algorithm?

- Recurrence:

Strassen's Algorithm

Multiply 2 x 2 Matrices:

$$\begin{array}{|c|c|} \hline r & s \\ \hline t & u \\ \hline \end{array} = \begin{array}{|c|c|} \hline a & b \\ \hline c & d \\ \hline \end{array} \begin{array}{|c|c|} \hline e & g \\ \hline f & h \\ \hline \end{array}$$

$$r = p_1 + p_2 - p_4 + p_6$$

$$s = p_4 + p_5$$

$$t = p_6 + p_7$$

$$u = p_2 - p_3 + p_5 - p_7$$

Where:

$$p_1 = (b - d)(f + h)$$

$$p_2 = (a + d)(e + h)$$

$$p_3 = (a - c)(e + g)$$

$$p_4 = (a + b)h$$

$$p_5 = a(g - h)$$

$$p_6 = d(f - e)$$

$$p_7 = (c + d)e$$

Recurrence for Strassen's Algorithms

- $T(n) = 7 T(n/2) + cn^2$
- What is the runtime?

$$\log_2 7 = 2.8073549221$$

BFPRT Recurrence

$$T(n) \leq T(3n/4) + T(n/5) + 20n$$

What bound do you expect?