

CSE 421 Algorithms


Richard Anderson
Lecture 18
Dynamic Programming

Announcements

- Homework Deadlines
 - HW 6: Friday, November 13
 - HW 7: Wednesday, November 18
 - HW 8: Wednesday, November 25
 - HW 9: Friday, December 4
 - HW 10: Friday, December 11

Optimal linear interpolation


Optimal linear interpolation with K segments

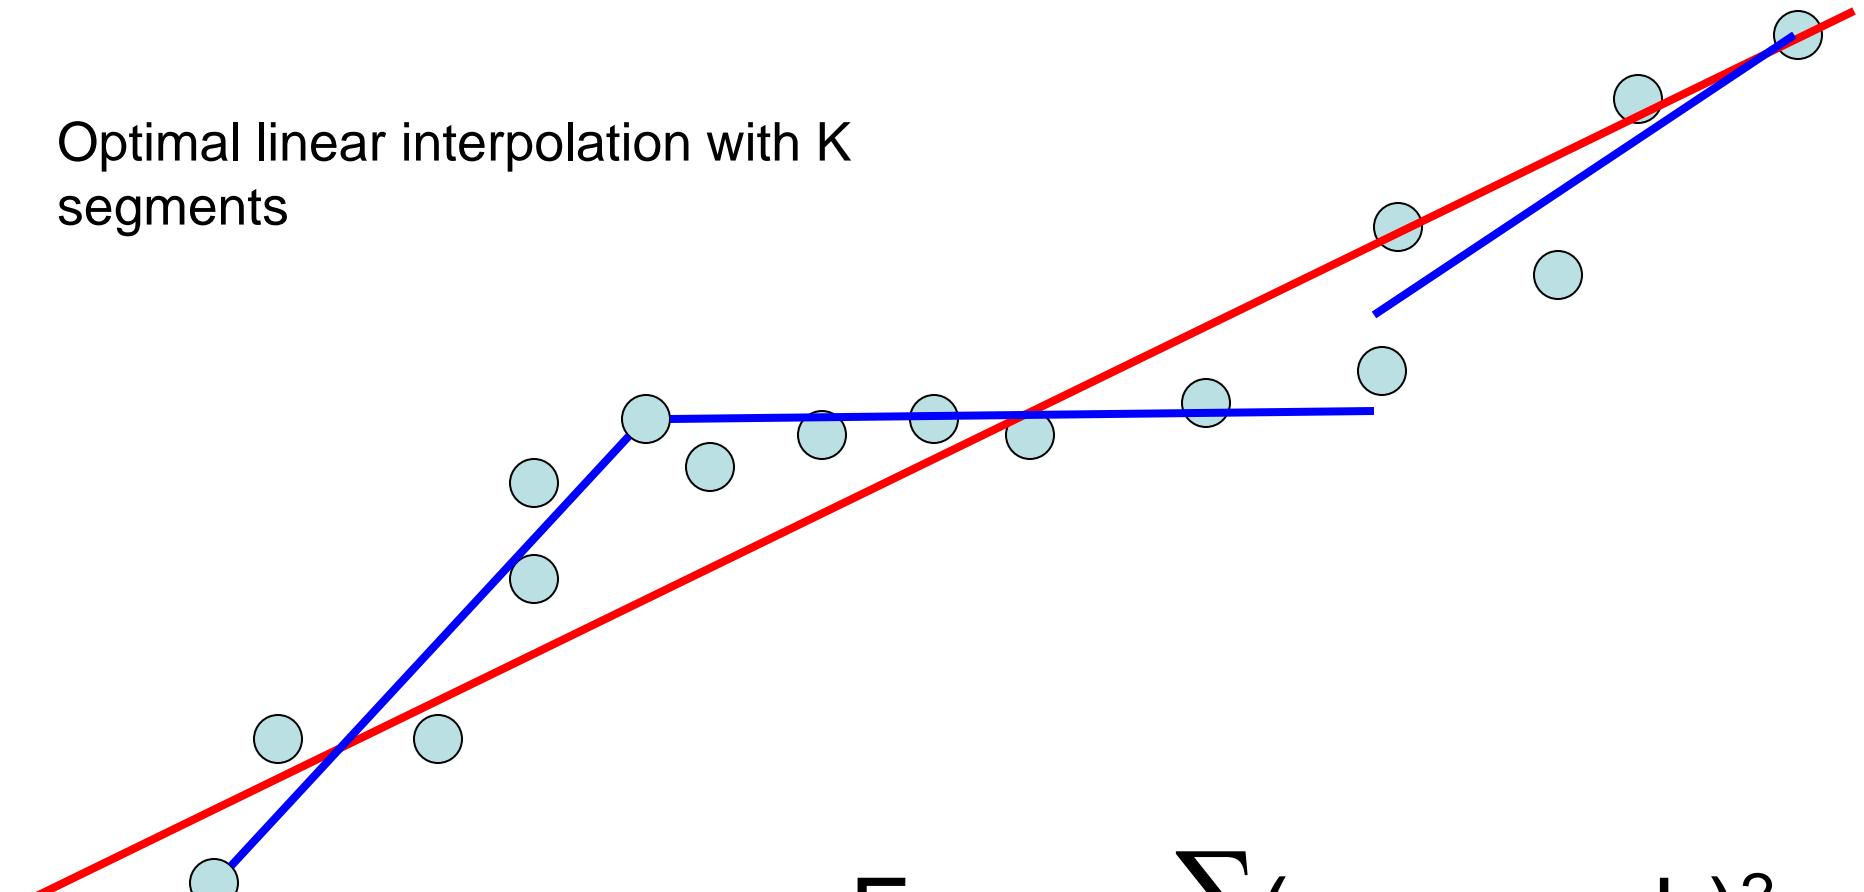

$$\text{Error} = \sum (y_i - ax_i - b)^2$$

Notation

- Points p_1, p_2, \dots, p_n ordered by x-coordinate ($p_i = (x_i, y_i)$)
- $E_{i,j}$ is the least squares error for the optimal line interpolating p_i, \dots, p_j

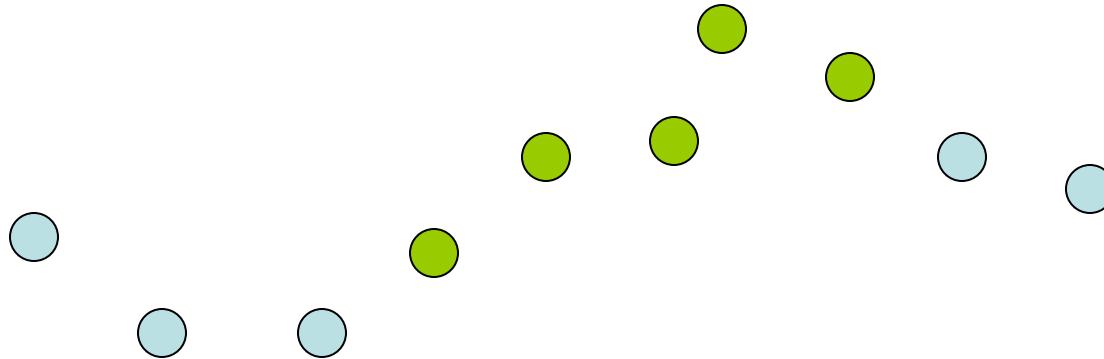

Optimal interpolation with k segments

- Optimal segmentation with three segments
 - $\text{Min}_{i,j}\{E_{1,i} + E_{i,j} + E_{j,n}\}$
 - $O(n^2)$ combinations considered
- Generalization to k segments leads to considering $O(n^{k-1})$ combinations


$\text{Opt}_k[j]$: Minimum error approximating $p_1 \dots p_j$ with k segments

Express $\text{Opt}_k[j]$ in terms of $\text{Opt}_{k-1}[1], \dots, \text{Opt}_{k-1}[j]$

$$\text{Opt}_k[j] = \min_i \{ \text{Opt}_{k-1}[i] + E_{i,j} \} \text{ for } 0 < i < j$$

Optimal sub-solution property

Optimal solution with k segments extends
an optimal solution of $k-1$ segments on a
smaller problem

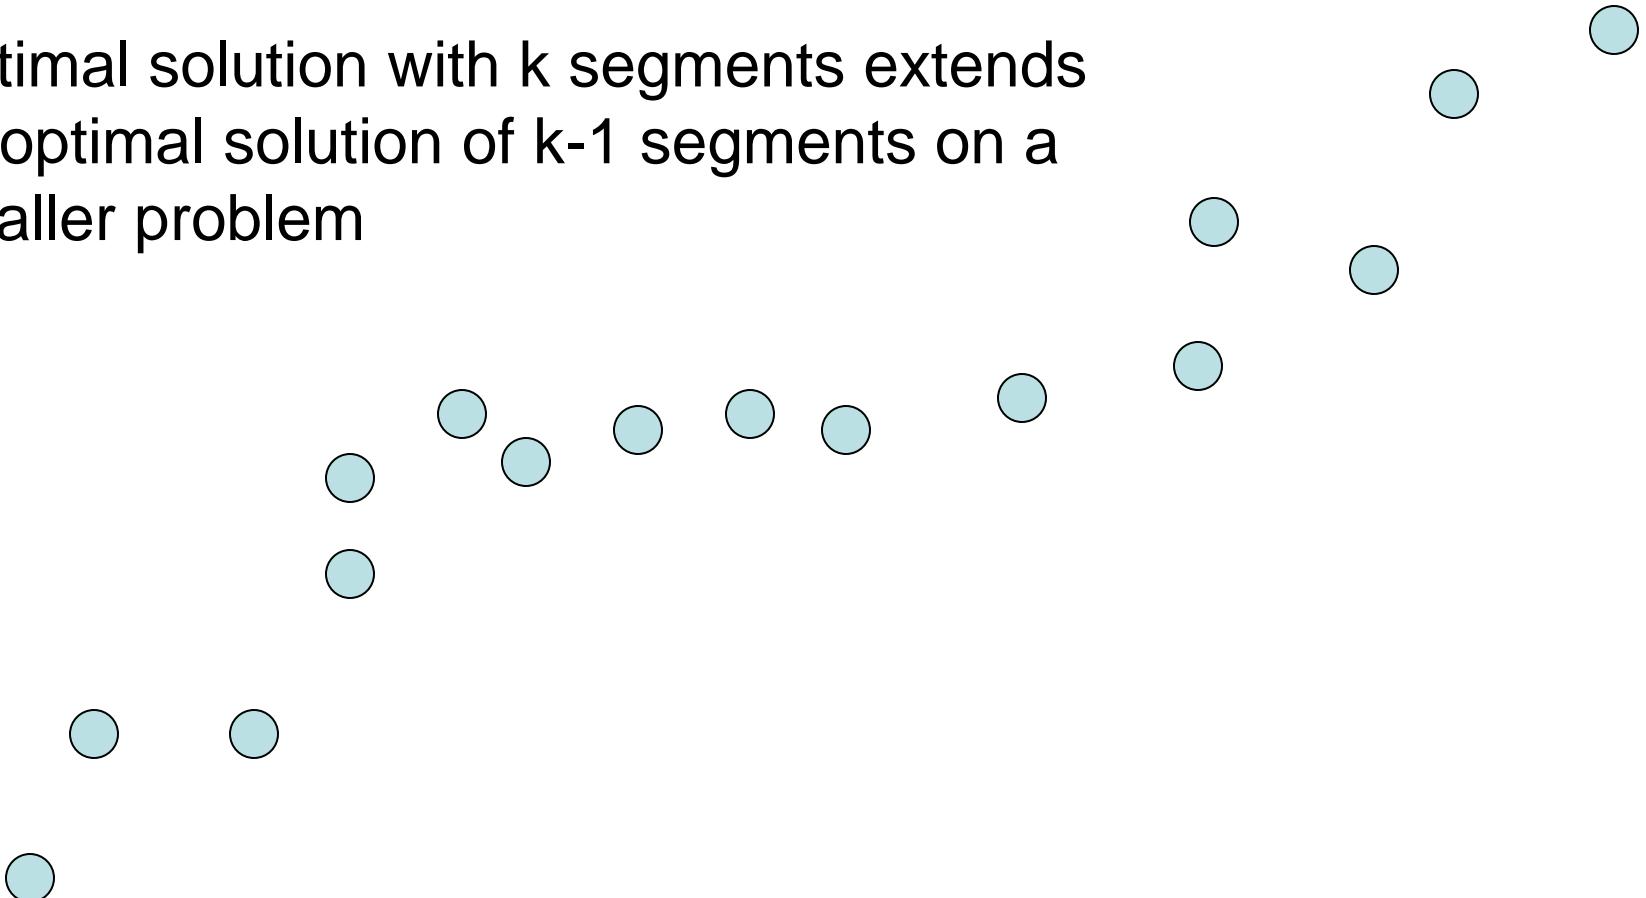

Optimal multi-segment interpolation

Compute $\text{Opt}[k, j]$ for $0 < k < j < n$

for $j := 1$ to n

$\text{Opt}[1, j] = E_{1,j};$

for $k := 2$ to $n-1$

 for $j := 2$ to n

$t := E_{1,j}$

 for $i := 1$ to $j - 1$

$t = \min(t, \text{Opt}[k-1, i] + E_{i,j})$


$\text{Opt}[k, j] = t$

Determining the solution

- When $\text{Opt}[k,j]$ is computed, record the value of i that minimized the sum
- Store this value in a auxiliary array
- Use to reconstruct solution

Variable number of segments

- Segments not specified in advance
- Penalty function associated with segments
- Cost = Interpolation error + C x #Segments

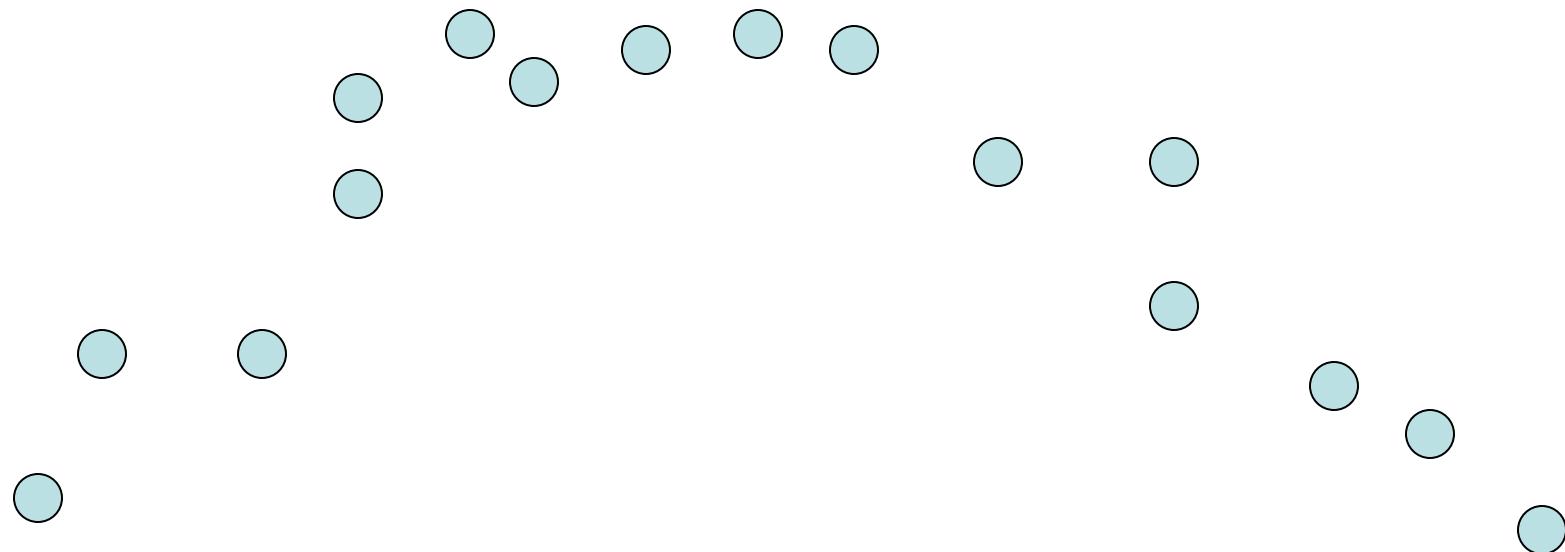

Penalty cost measure

- $\text{Opt}[j] = \min(E_{1,j}, \min_i(\text{Opt}[i] + E_{i,j} + P))$

Subset Sum Problem

- Let $w_1, \dots, w_n = \{6, 8, 9, 11, 13, 16, 18, 24\}$
- Find a subset that has as large a sum as possible, without exceeding 50

Adding a variable for Weight

- $\text{Opt}[j, K]$ the largest subset of $\{w_1, \dots, w_j\}$ that sums to at most K
- $\{2, 4, 7, 10\}$
 - $\text{Opt}[2, 7] =$
 - $\text{Opt}[3, 7] =$
 - $\text{Opt}[3, 12] =$
 - $\text{Opt}[4, 12] =$

Subset Sum Recurrence

- $\text{Opt}[j, K]$ the largest subset of $\{w_1, \dots, w_j\}$ that sums to at most K

Subset Sum Grid

$$\text{Opt}[j, K] = \max(\text{Opt}[j - 1, K], \text{Opt}[j - 1, K - w_j] + w_j)$$

4																
3																
2																
1																
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

{2, 4, 7, 10}

Subset Sum Code

```
for j = 1 to n
```

```
    for k = 1 to W
```

```
        Opt[j, k] = max(Opt[j-1, k], Opt[j-1, k-wj] + wj)
```

Knapsack Problem

- Items have weights and values
- The problem is to maximize total value subject to a bound on weight
- Items $\{I_1, I_2, \dots, I_n\}$
 - Weights $\{w_1, w_2, \dots, w_n\}$
 - Values $\{v_1, v_2, \dots, v_n\}$
 - Bound K
- Find set S of indices to:
 - Maximize $\sum_{i \in S} v_i$ such that $\sum_{i \in S} w_i \leq K$

Knapsack Recurrence

Subset Sum Recurrence:

$$\text{Opt}[j, K] = \max(\text{Opt}[j - 1, K], \text{Opt}[j - 1, K - w_j] + w_j)$$

Knapsack Recurrence:

Knapsack Grid

$$\text{Opt}[j, K] = \max(\text{Opt}[j - 1, K], \text{Opt}[j - 1, K - w_j] + v_j)$$

4																
3																
2																
1																
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Weights {2, 4, 7, 10} Values: {3, 5, 9, 16}

Dynamic Programming Examples

- Examples
 - Optimal Billboard Placement
 - Text, Solved Exercise, Pg 307
 - Linebreaking with hyphenation
 - Compare with HW problem 6, Pg 317
 - String approximation
 - Text, Solved Exercise, Page 309

Billboard Placement

- Maximize income in placing billboards
 - $b_i = (p_i, v_i)$, v_i : value of placing billboard at position p_i
- Constraint:
 - At most one billboard every five miles
- Example
 - $\{(6,5), (8,6), (12, 5), (14, 1)\}$

Design a Dynamic Programming Algorithm for Billboard Placement

- Compute Opt[1], Opt[2], . . . , Opt[n]
- What is Opt[k]?

Input b_1, \dots, b_n , where $b_i = (p_i, v_i)$, position and value of billboard i

$$\text{Opt}[k] = \text{fun}(\text{Opt}[0], \dots, \text{Opt}[k-1])$$

- How is the solution determined from sub problems?

Input b_1, \dots, b_n , where $b_i = (p_i, v_i)$, position and value of billboard i

Solution

```
j = 0;          // j is five miles behind the current position  
               // the last valid location for a billboard, if one placed at P[k]  
  
for k := 1 to n  
    while (P[ j ] < P[ k ] - 5)  
        j := j + 1;  
    j := j - 1;  
    Opt[ k] = Max(Opt[ k-1] , V[ k ] + Opt[ j ]);
```

Optimal line breaking and hyphenation

- Problem: break lines and insert hyphens to make lines as balanced as possible
- Typographical considerations:
 - Avoid excessive white space
 - Limit number of hyphens
 - Avoid widows and orphans
 - Etc.

Penalty Function

- $\text{Pen}(i, j)$ – penalty of starting a line at position i , and ending at position j

Optimal line breaking and hyphenation is computed with dynamic programming

- Key technical idea
 - Number the breaks between words/syllables

String approximation

- Given a string S , and a library of strings $B = \{b_1, \dots, b_m\}$, construct an approximation of the string S by using copies of strings in B .

$B = \{\text{abab}, \text{bbbaaa}, \text{ccbb}, \text{ccaacc}\}$

$S = \text{abaccbbbaabbccbbccaabab}$

Formal Model

- Strings from B assigned to non-overlapping positions of S
- Strings from B may be used multiple times
- Cost of δ for unmatched character in S
- Cost of γ for mismatched character in S
 - $\text{MisMatch}(i, j)$ – number of mismatched characters of b_j , when aligned starting with position i in s.

Design a Dynamic Programming Algorithm for String Approximation

- Compute Opt[1], Opt[2], . . . , Opt[n]
- What is Opt[k]?

Target string $S = s_1s_2\dots s_n$

Library of strings $B = \{b_1, \dots, b_m\}$

$\text{MisMatch}(i, j)$ = number of mismatched characters with b_j when aligned starting at position i of S .

$$\text{Opt}[k] = \text{fun}(\text{Opt}[0], \dots, \text{Opt}[k-1])$$

- How is the solution determined from sub problems?

Target string $S = s_1s_2\dots s_n$

Library of strings $B = \{b_1, \dots, b_m\}$

$\text{MisMatch}(i, j)$ = number of mismatched characters with b_j when aligned starting at position i of S .

Solution

for $i := 1$ to n

$$\text{Opt}[k] = \text{Opt}[k-1] + \delta;$$

for $j := 1$ to $|B|$

$$p = i - \text{len}(b_j);$$

$$\text{Opt}[k] = \min(\text{Opt}[k], \text{Opt}[p-1] + \gamma \text{MisMatch}(p, j));$$