

CSE 421 Algorithms

Autumn 2019
Lecture 5

Announcements

- Reading
 - Chapter 3 (Mostly review)
 - Start on Chapter 4

Review from Wednesday

- Run time function $T(n)$
 - $T(n)$ is the maximum time to solve an instance of size n
- Disregard constant functions
- $T(n)$ is $O(f(n))$ $[T : \mathbb{Z}^+ \rightarrow \mathbb{R}^+]$
 - If n is sufficiently large, $T(n)$ is bounded by a constant multiple of $f(n)$
 - Exist c, n_0 , such that for $n > n_0$, $T(n) < c f(n)$


Graph Theory

- $G = (V, E)$
 - V – vertices
 - E – edges
- Undirected graphs
 - Edges sets of two vertices $\{u, v\}$
- Directed graphs
 - Edges ordered pairs (u, v)
- Many other flavors
 - Edge / vertices weights
 - Parallel edges
 - Self loops


Definitions

- Path: v_1, v_2, \dots, v_k , with (v_i, v_{i+1}) in E
 - Simple Path
 - Cycle
 - Simple Cycle
- Neighborhood
 - $N(v)$
- Distance
- Connectivity
 - Undirected
 - Directed (strong connectivity)
- Trees
 - Rooted
 - Unrooted

Graph Representation



$V = \{ a, b, c, d \}$
 $E = \{ \{a, b\}, \{a, c\}, \{a, d\}, \{b, d\} \}$



Adjacency List

	1	1	1
1		0	1
1	0		0
1	1	0	

Incidence Matrix

Graph search


- Find a path from s to t

```

S = {s}
while S is not empty
  u = Select(S)
  visit u
  foreach v in N(u)
    if v is unvisited
      Add(S, v)
      Pred[v] = u
    if (v = t) then path found
  
```


Breadth first search

- Explore vertices in layers
 - s in layer 1
 - Neighbors of s in layer 2
 - Neighbors of layer 2 in layer 3 . . .

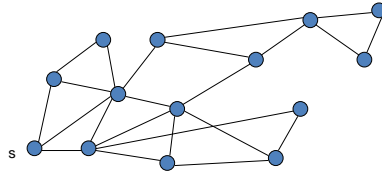


Key observation

- All edges go between vertices on the same layer or adjacent layers




Bipartite Graphs

- A graph V is bipartite if V can be partitioned into V_1, V_2 such that all edges go between V_1 and V_2
- A graph is bipartite if it can be two colored

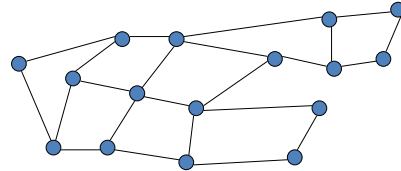

Can this graph be two colored?

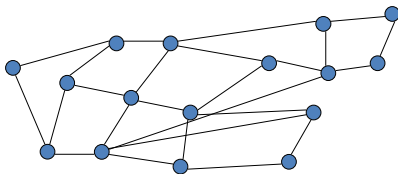


Algorithm

- Run BFS
- Color odd layers red, even layers blue
- If no edges between the same layer, the graph is bipartite
- If edge between two vertices of the same layer, then there is an odd cycle, and the graph is not bipartite

Theorem: A graph is bipartite if and only if it has no odd cycles

Lemma 1

- If a graph contains an odd cycle, it is not bipartite



Lemma 2

- If a BFS tree has an *intra-level edge*, then the graph has an odd length cycle


Intra-level edge: both end points are in the same level

Lemma 3

- If a graph has no odd length cycles, then it is bipartite

Graph Search

- Data structure for next vertex to visit determines search order

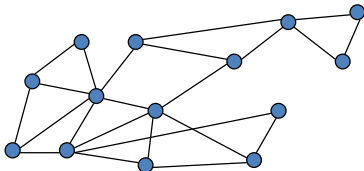

Graph search

Breadth First Search


```
S = {s}
while S is not empty
  u = Dequeue(S)
  if u is unvisited
    visit u
    foreach v in N(u)
      Enqueue(S, v)
```

Depth First Search

```
S = {s}
while S is not empty
  u = Pop(S)
  if u is unvisited
    visit u
    foreach v in N(u)
      Push(S, v)
```

Breadth First Search

- All edges go between vertices on the same layer or adjacent layers



Depth First Search

- Each edge goes between vertices on the same branch
- No cross edges

