

CSE 421

Introduction to Algorithms

Lecture 2: Stable Matching Properties, Overview



Administrative

- Homework 1
 - Posted on course website
 - Due next Wednesday
 - Available for Gradescope submission
- Edstem discussion:
 - Public: Discuss everything course-related except *solutions* to current homework or anything about on-going exams
 - Use private posts to staff for other kinds of questions:
- Office hours start today

Stable Matching Problem

Goal: Given two groups of n people each, find a “stable matching”.

- Participants rate members from opposite group.
- Each person lists members from the other group in order of preference from best to worst.
- **Matching:** Each person matched with exactly one person in the other group.
- **Stable:** No pair of people both prefer to be with each other rather than with their assigned partner

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
X	A	B	C
Y	B	A	C
Z	A	B	C

Group P Preference Profile

	favorite ↓		least favorite ↓
	1 st	2 nd	3 rd
A	Y	X	Z
B	X	Y	Z
C	X	Y	Z

Group R Preference Profile

Propose-And-Reject Algorithm

Propose-and-reject algorithm: [Gale-Shapley 1962]

Intuitive method that guarantees to find a stable matching.

- Members of one group P make *proposals*, the other group R receives proposals

```
Initialize each person to be free
while (some p in P is free) {
  Choose some free p in P
  r = 1st person on p's preference list to whom p has not yet proposed
  if (r is free)
    tentatively match (p,r) //p and r both engaged, no longer free
  else if (r prefers p to current tentative match p')
    replace (p',r) by (p,r) //p now engaged, p' now free
  else
    r rejects p
}
```

Gale-Shapley Algorithm

Gale-Shapley algorithm: Guarantees to find a stable matching for *any* problem instance.

⇒ a stable matching always exists!

Q: How do we implement the Gale-Shapley algorithm efficiently?

Q: If there are multiple stable matchings, which one(s) does it find?

Implementation for Stable Matching

- Input size
 - $N = 2n^2$ words
 - $2n$ people each with a preference list of length n
 - $2n^2 \log n$ bits
 - specifying an ordering for each preference list takes $n \log n$ bits
- Brute force algorithm
 - Try all $n!$ possible matchings
- Gale-Shapley Algorithm
 - n^2 iterations. Can have constant time per iteration as follows ...

Efficient Implementation

How do we get the $O(n^2)$ time implementation?

Input: Representing members of the two groups P and R and their preferences:

- Assume elements of P (proposers) are numbered $1, \dots, n$.
- Assume elements of R (receivers) are numbered $1', \dots, n'$.
- For each proposer, a list/array of the n receivers, ordered by preference.
- For each receiver, a list/array of the n proposers, ordered by preference.

The matching:

- Maintain two arrays $match[p]$, and $match'[r]$.
 - set entry to 0 if free /
 - if p matched to r then $match[p]=r$ and $match'[r]=p$

Making proposals:

- Maintain a list of free proposers, e.g., in a queue.
- Maintain an array $count[p]$ that counts the number of proposals already made by proposer p .

Efficient Implementation

Rejecting/accepting proposals:

- Does receiver r prefer proposer p to proposer p' ?
 - Using original preference list would be slow
- For each receiver, create *inverse* of preference list of proposers.
- Constant time access for each query after $O(n)$ preprocessing per receiver. $O(n^2)$ total preprocessing cost.

r	1 st	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th
pref	8	3	7	1	4	5	6	2

Proposer 3 or proposer 6?

reject

r	1	2	3	4	5	6	7	8
inverse	4 th	8 th	2 nd	5 th	6 th	7 th	3 rd	1 st

```
for i = 1 to n
    inverse[pref[i]] = i
```

r prefers proposer 3 to 6
since $\text{inverse}[3] = 2 < 7 = \text{inverse}[6]$

Understanding the Solution

Q: For a given problem input, there may be several stable matchings.
Do all executions of Gale-Shapley yield the same stable matching?
If so, which one?

- An instance with two stable matchings (see section for more).
 - $(A, X), (B, Y), (C, Z)$.
 - $(A, Y), (B, X), (C, Z)$.

	1 st	2 nd	3 rd
X	A ✓	B	C
Y	B ✓	A	C
Z	A	B	C ✓

	1 st	2 nd	3 rd
A	Y	X ✓	Z
B	X	Y ✓	Z
C	X	Y	Z ✓

Understanding the Solution

Q: For a given problem input, there may be several stable matchings.
Do all executions of Gale-Shapley yield the same stable matching?
If so, which one?

Def: p in P and r in R are **valid partners** iff there is some stable matching containing (p, r)

Def: Proposer-optimal assignment: Each proposer is matched with their **best valid partner**
(their most preferred among all of their valid partners)

Claim: All executions of Gale-Shapley yield a proposer-optimal assignment!

- Not obvious that proposer-optimal assignment is perfect, let alone stable
- Simultaneously best for each and every proposer

Proposer Optimality

Claim: Any Gale-Shapley matching M is proposer-optimal.

Proof: (By contradiction)

Suppose that there are some proposers in M not matched to their best valid partners

\Rightarrow Each must have been rejected by a valid partner, since they propose in decreasing preference order.

- Among all of these, choose the **first** time a proposer p is rejected by a valid partner.
- Call that rejecting valid partner r . Let p' be the proposer who r prefers to p s.t either (r was engaged to p') or (p' replaced p) when that rejection happened.

Let M' be a stable matching containing (p, r) . Must exist since (p, r) are valid partners

Let r' be the partner of p' in M' . This $\Rightarrow (p', r')$ are valid partners.



- Since r rejecting p was the **first** rejection by a valid partner, when that happened, r' had not rejected p' since (p', r') are valid partners $\Rightarrow p'$ hadn't proposed to r' .
- $\Rightarrow p'$ prefers r to r'

But we already said that r prefers p' to p .

$\Rightarrow p-r$ is unstable in M' .

$\Rightarrow M'$ is not stable. **Contradiction** ■

Want to prove that these rejections never happen

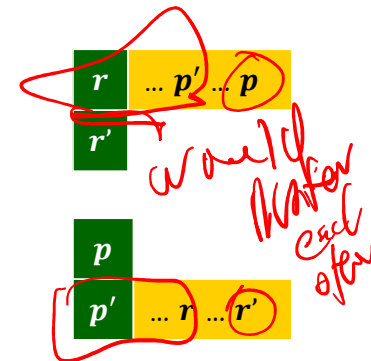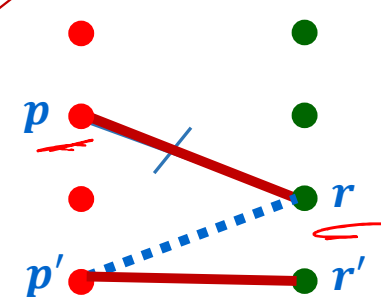

Non-obvious consequence of proposer optimality

- That proof worked no matter which free proposer was selected in each step!
- There is just one proposer-optimal stable matching

So all the orders of selecting free proposers in the Gale-Shapley algorithm yield the same stable matching!

Stable Matching: Summary so far

Stable matching problem: Given preference profiles of two groups of n people, find a **stable** matching between them.

No pair of people both prefer to be with each other rather than with their assigned partner

Gale-Shapley algorithm: Finds a stable matching in $O(n^2)$ time.

Proposer-optimality: In Gale-Shapley matching, each proposer gets best partner possible among all stable matchings

Q: Does proposer-optimality come at the expense of the other side?

Receiver Pessimality

Receiver-pessimal assignment: Each receiver gets their worst valid partner.

Claim: Gale-Shapley produces a receiver-pessimal stable matching M .

Proof: (By contradiction again)

Suppose (p, r) matched in M , but p is not worst valid partner for r .



\Rightarrow there exists some other stable matching M' in which r is paired with a proposer, say p' , whom r likes less than p .

Let r' be the partner of p in M' .

Since M is proposer-optimal, p prefers r to r' .

$\Rightarrow p-r$ is an unstable in M'


$\Rightarrow M'$ is not stable. ■

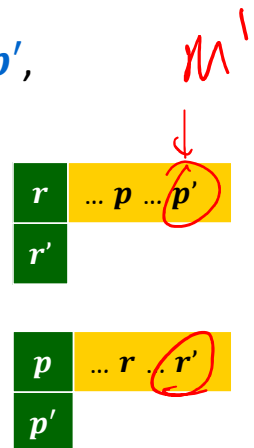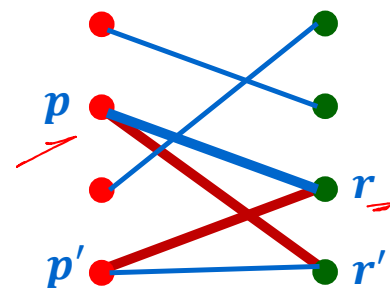

Extensions: Matching Residents to Hospitals

Original: Proposers \approx hospitals, Receivers \approx med school residents.

Variation 1: Some participants declare others as unacceptable. 

Variation 2: Unequal number of proposers and receivers. 

Variation 3: Limit on # of pairs person participates in can be >1 .

Def: Matching M is **unstable** if there is a hospital h and resident r such that:

- h and r are acceptable to each other; and
- either r is unmatched, or r prefers h to her assigned hospital; and
- either h does not have all its places filled, or h prefers r to at least one of its assigned residents.

Application: Matching Residents to Hospitals

NRMP: (National Resident Matching Program)

- Original use just after WWII
- Ides of March: 23,000+ residents legally bound by the outcome
- Pre-1995 NRMP favored hospitals (they proposed)
- Changed in 1995 to favor residents (after a lawsuit)

Rural hospital dilemma:

- Certain hospitals (mainly in rural areas) were unpopular and declared unacceptable by many residents.
- Rural hospitals were under-subscribed in NRMP matching.
- Q: Find stable matching that benefits "rural hospitals"?

Rural hospital theorem: Rural hospitals get exactly same residents in every stable matching!

The original paper

The title of the 1962 Gale-Shapley paper was “College Admissions and the Stability of Marriage”

- The propose-and-reject algorithm was clearly inspired by Western traditions of proposals
- The fact that the result is much more advantageous to the proposing side even in this non-binding scenario took some time to be appreciated

Though Gale had died by then, Shapley and Roth shared the 2012 Nobel Prize in Economic Sciences for their work on stable assignments.

Lessons Learned

- Powerful ideas learned in course.
 - Isolate underlying structure of problem.
 - Create useful and efficient algorithms.
- Potentially deep social ramifications. [\[legal disclaimer\]](#)
- Technique: sometimes useful to consider the first time something bad might happen for an algorithm in order to rule it out. 