CSE 440: Introduction to HCI

User Interface Design, Prototyping, and Evaluation

Lecture 12:
Human Performance

Tuesday / Thursday
12:00 to 1:20

James Fogarty
Kailey Chan
Dhruv Jain
Nigini Oliveira
Chris Seeds
Jihoon Suh

PAUL G. ALLEN SCHOOL
OF COMPUTER SCIENCE & ENGINEERING

DESIGN
USE
BUILD

Project Status

It just keeps going forward

Looking Forward

- 3c: Usability Testing Check-In Due Friday 11/10
- 3d: Usability Testing Review Due Monday 11/13
- 3e: Digital Mockup Due Thursday 11/16

Other Assignments

- Reading 4 Due Saturday 11/11, Sooner is Better
- Reading 5 Can Be Done Anytime, Sooner is Better

Objectives

Be able to:

Describe an interaction in terms of a model, such as Norman's Execution-Evaluation Cycle or Buxton's 3-State Model

Describe properties of the human perceptual system that impact interaction

Use the Model Human Processor to describe simple human performance phenomena

Describe what Fitts's Law models, how terms in the model impact interaction, how the model can be used in low-level and higher-level interaction design

Describe the Gestalt perspective on human perception

These are Examples of What?

Popsicle-stick bridge

$x = x_0 + v_0t + \frac{1}{2} at^2$

ACT-R

Goffman's Negotiated Approach

Norman's Execution-Evaluation Cycle

Models

We have said models describe phenomena, isolating components and allowing a closer look

Today is a closer look at modeling humans

- Capture essential pieces
  - Model should have what it needs but no more
  - Thus avoid underfitting or overfitting model
- Allow us to measure
  - Collect data, put in model, compare model terms
- Allow us to predict
  - The better the model, the better the predictions

Models of Interaction

Models of interaction allow a closer look

- Define and describe an interaction
- Isolate areas where problems occur
- Design new interaction

Two examples at different scales

- Norman’s Execution-Evaluation Cycle
- Buxton’s 3-State Model

Models of Interaction

Models of interaction allow a closer look

- Define and describe an interaction
- Isolate areas where problems occur
- Design new interaction

Two examples at different scales

- Norman's Execution-Evaluation Cycle
- Buxton's 3-State Model

"All models are wrong, but some are useful"
George Box

Norman's Execution-Evaluation Cycle

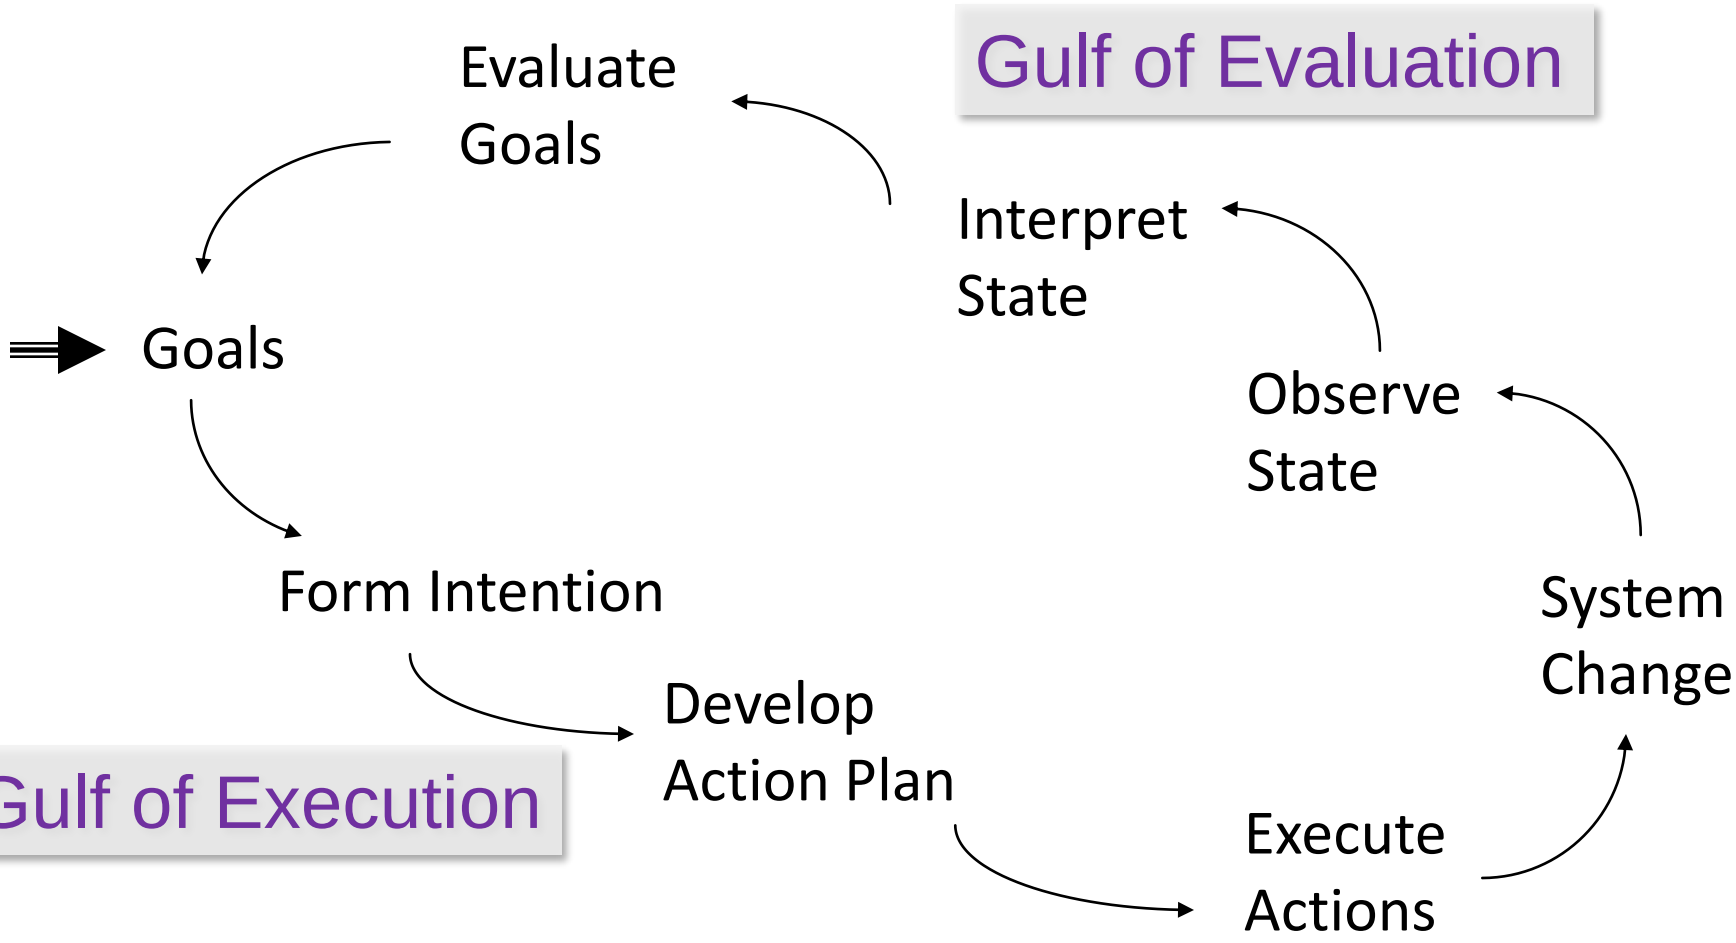

Buxton's 3-State Model

Mouse

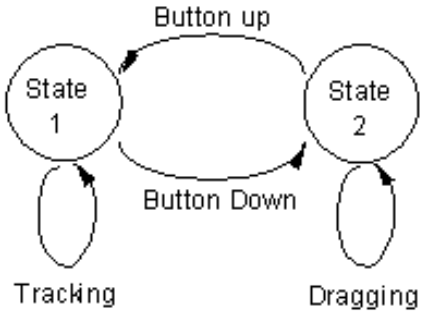

Touchpad

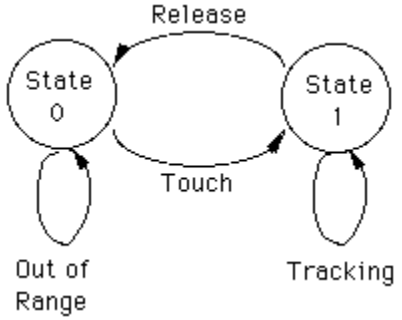

Stylus

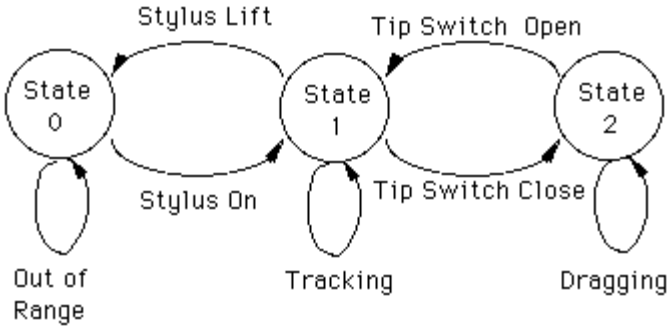

Touch Screen

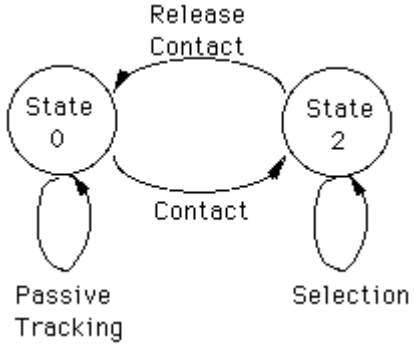

Buxton's 3-State Model

Mouse

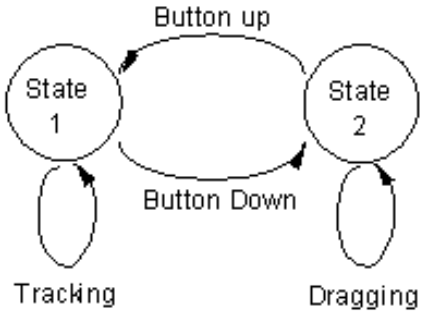

Touchpad

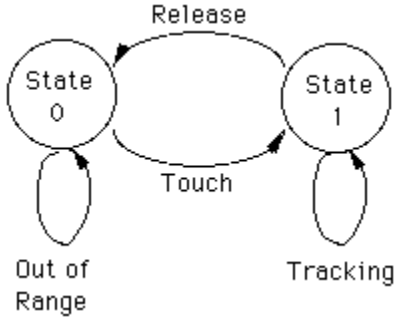

Stylus

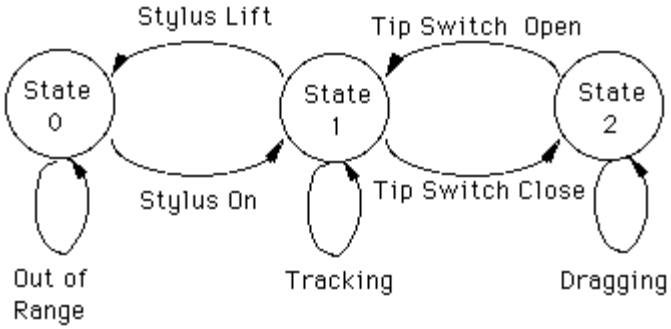

Touch Screen

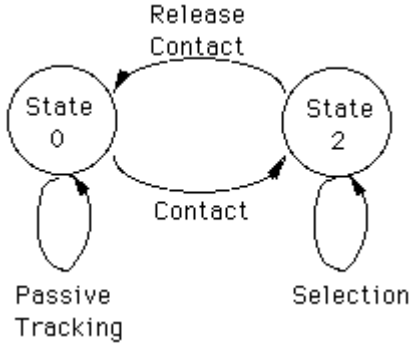

Which can support tooltip previews?

Creating a Model

How would you go about creating a model?

Creating a Model

How would you go about creating a model?

One approach:

Observe, Collect Data, Find Patterns,
Draw Analogies, Devise Model,
Test Fit to Data, Test Predictions, Revise

Fundamentally an inductive process

From specific observations
to broader generalization

Today

Some example models of human performance

Visual System	Biological Model
Model Human Processor	Higher-Level Model
Fitts's Law	Model by Analogy
Gestalt Principles	Predict Interpretation

Human Visual System

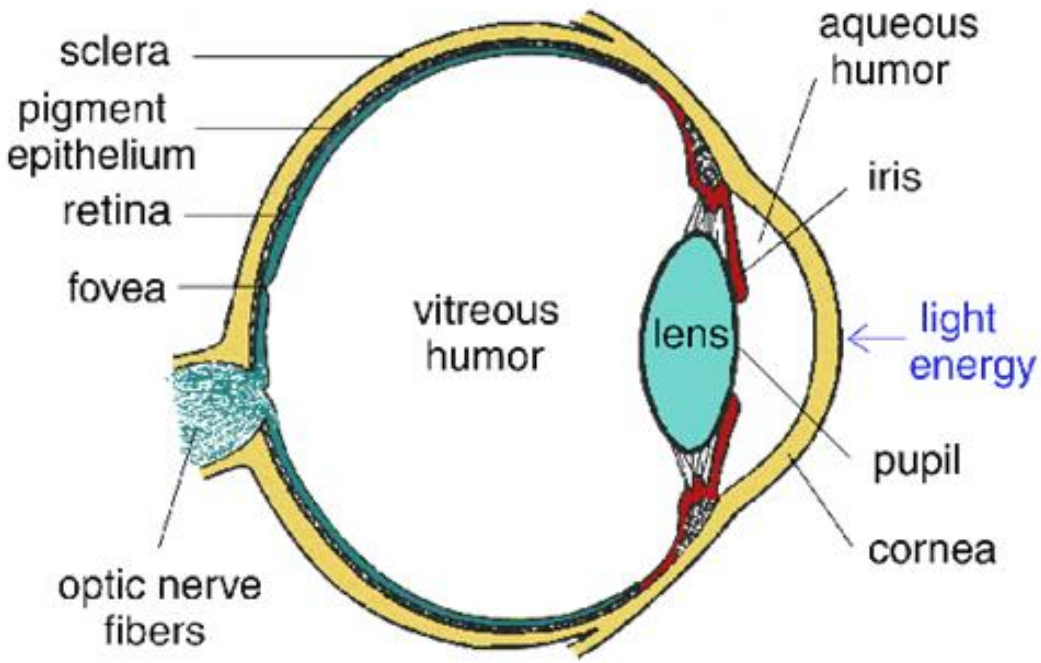

Light passes through lens, focused on retina

Blind Spot?

Blind Spot

a b c d e f g h

i j k l m n o p

q r s t u v w x

Use right eye, look at letters

Blind Spot

Use left eye, look at cross

Visible Spectrum

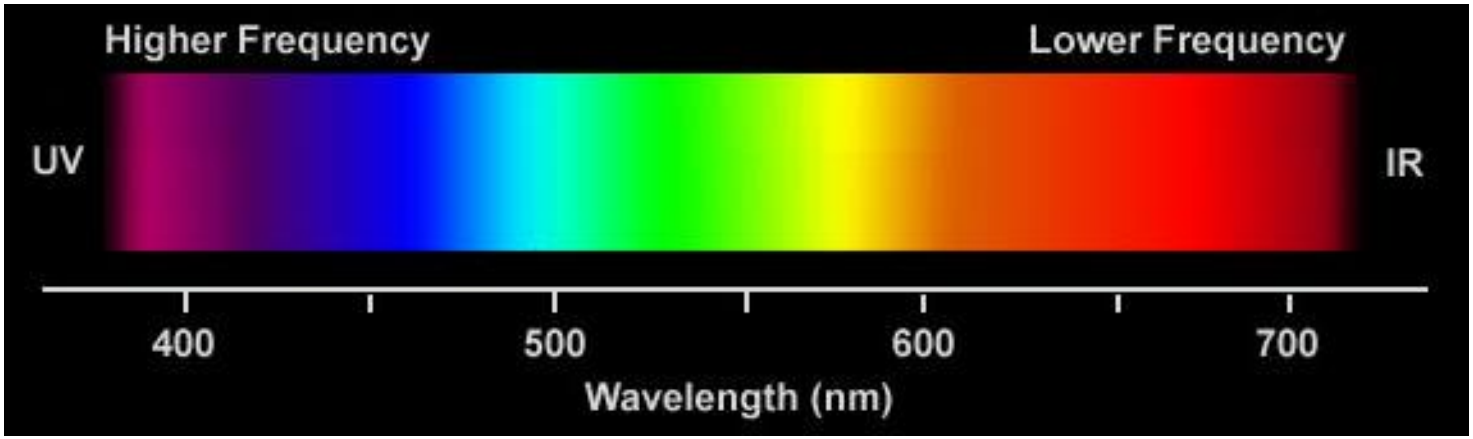

Retina

- Covered with light-sensitive receptors
  - Rods (120 million)
    - Sensitive to broad spectrum of light
    - Sensitive to small amounts of light
    - Cannot discriminate between colors
    - Sense intensity or shades of gray
    - Primarily for night vision & perceiving movement
  - Cones (6 million)
    - Used to sense color

Retina

Center of retina has most of the …

Retina

- Center of retina has most of the cones
  - Allows for high acuity of objects focused at center

Retina

Center of retina has most of the cones

- Allows for high acuity of objects focused at center

Edge of retina is dominated by …

Retina

Center of retina has most of the cones

- Allows for high acuity of objects focused at center

Edge of retina is dominated by rods

- Allows detecting motion of threats in periphery

Retina

Center of retina has most of the cones

- Allows for high acuity of objects focused at center

Edge of retina is dominated by rods

- Allows detecting motion of threats in periphery

What does that mean for you?

Retina

Center of retina has most of the cones

- Allows for high acuity of objects focused at center

Edge of retina is dominated by rods

- Allows detecting motion of threats in periphery

What does that mean for you?

- Peripheral movement is easily distracting

Retina

Center of retina has most of the cones

- Allows for high acuity of objects focused at center

Edge of retina is dominated by rods

- Allows detecting motion of threats in periphery

What does that mean for you?

- Peripheral movement is easily distracting

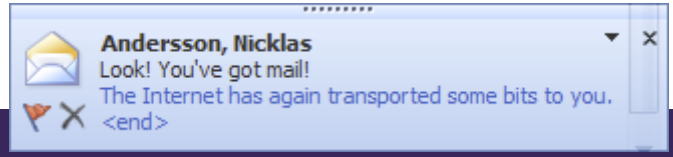

Color Perception via Cones

Photopigments used to sense color

3 types: blue, green, “red” (actually yellow)

- Each sensitive to different band of spectrum
- Ratio of neural activity stimulation for the three types of gives us a continuous perception of color

Color Sensitivity

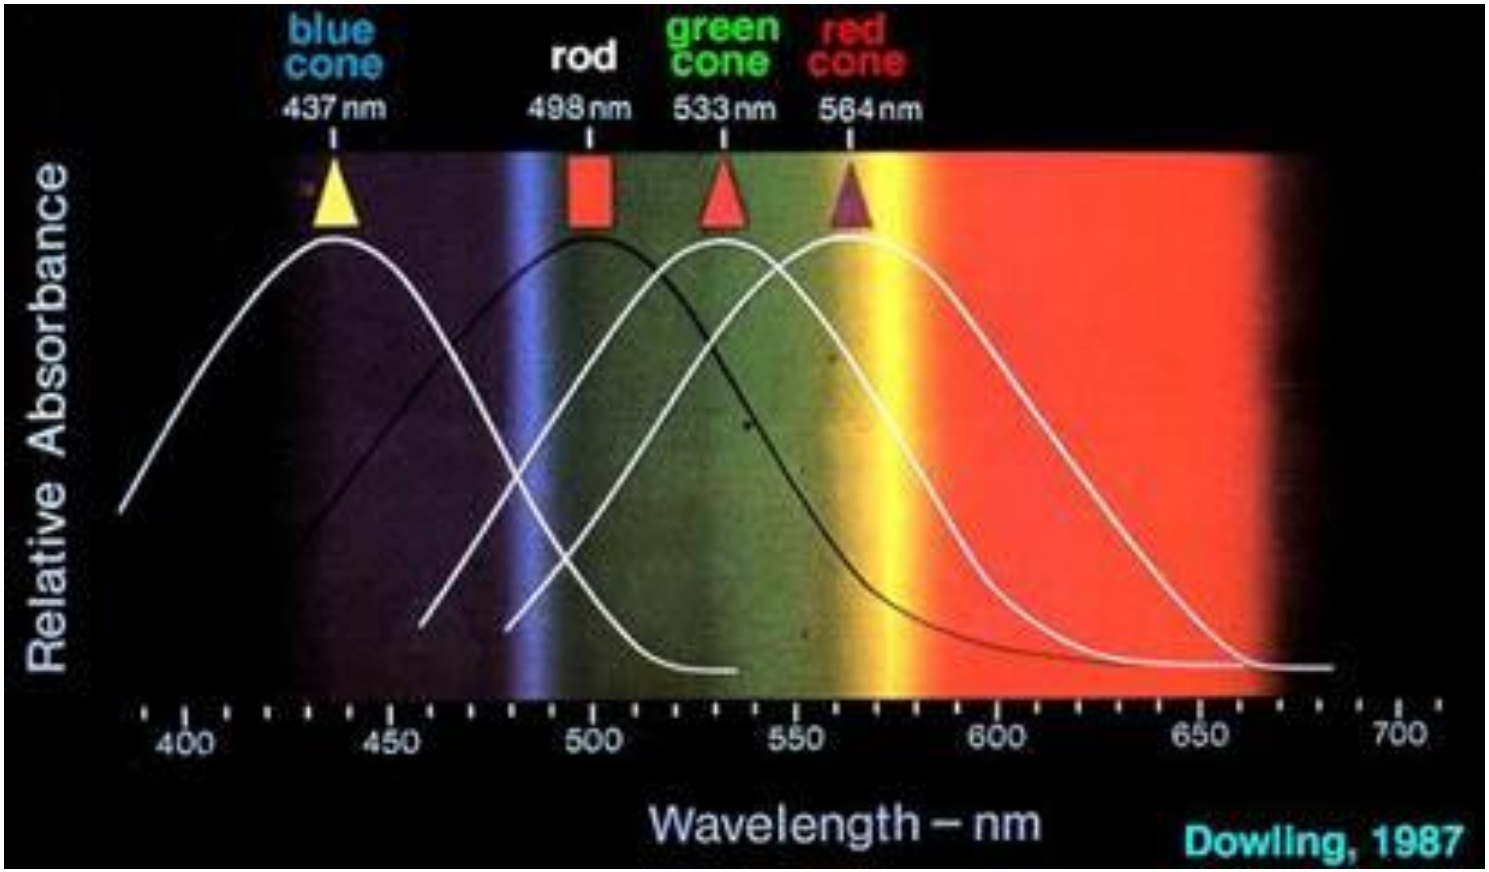

Distribution of Photopigments

- Not distributed evenly
  - Mainly reds (64%), Very few blues (4%)
  - Insensitivity to short wavelengths (i.e., blue)
- No blue cones in retina center
  - Fixation on small blue object yields “disappearance”
- Lens yellows with age, absorbs short wavelengths
  - Sensitivity to blue is reduced even further

Color Sensitivity & Image Detection

Most sensitive to center of spectrum

- To be perceived as the same, blues and reds must be brighter than greens and yellows

Brightness determined mainly by red and green

- Y = 0.3 Red + 0.59 Green + 0.11 Blue

Shapes detected by finding edges

- We use brightness and color difference

Implication

- Blue edges and shapes are hard

Color Sensitivity & Image Detection

Most sensitive to center of spectrum

- To be perceived as the same, blues and reds must be brighter than greens and yellows

Brightness determined mainly by red and green

- Y = 0.3 Red + 0.59 Green + 0.11 Blue

Shapes detected by finding edges

- We use brightness and color difference

Implication

- Blue edges and shapes are hard

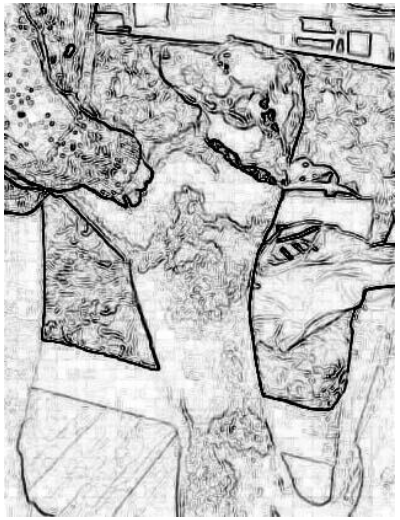

Focus

Different wavelengths of light focused at different distances behind eye's lens

- Constant refocusing causes fatigue

Saturated colors (i.e., pure colors) require more focusing than desaturated (i.e., pastels)

Focus

Different wavelengths of light focused at different distances behind eye's lens

- Constant refocusing causes fatigue

Saturated colors (i.e., pure colors) require more focusing than desaturated (i.e., pastels)

This hurts, why?

Color Deficiency

- Trouble discriminating colors
  - Affects about 9% of population
- Two main types
  - Different photopigment response most common
    - Reduces capability to discern small color differences
  - Red-Green deficiency is best known
    - Lack of either green or red photopigment, cannot discriminate colors dependent on red and green

Also known as color blindness

Red-Green Deficiency Test

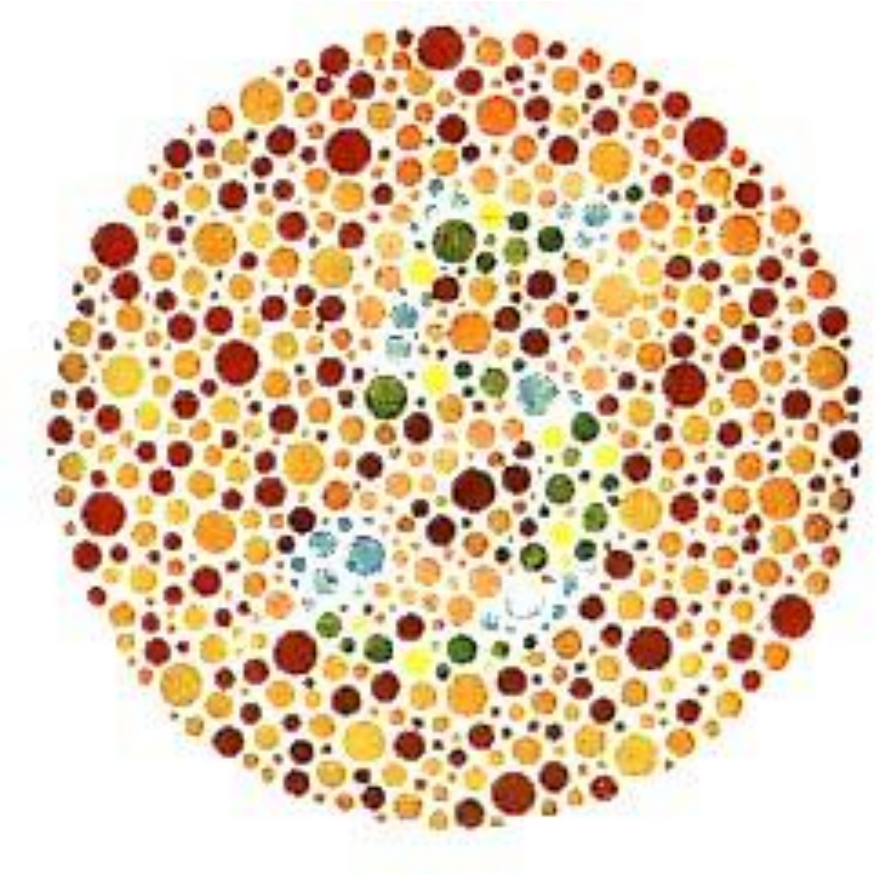

Dual / Redundant Encoding

Apples to Apples

Pandemic

http://danielsolisblog.blogspot.com/2011_03_01_archive.html

Dual / Redundant Encoding

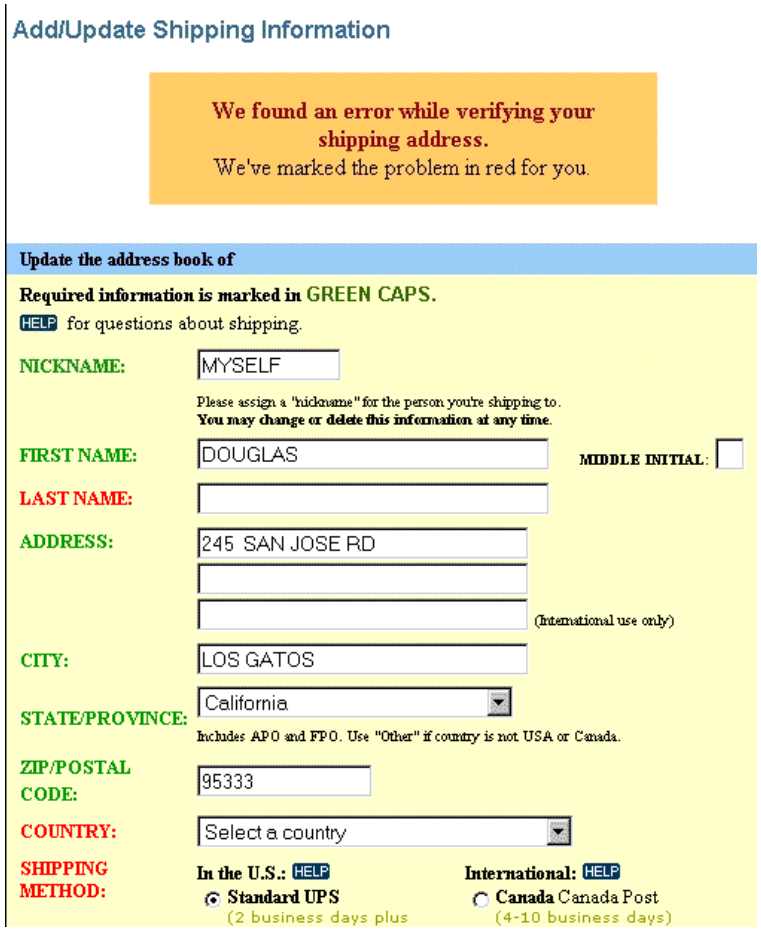

Today

Some example models of human performance

Visual System	Biological Model
Model Human Processor	Higher-Level Model
Fitts's Law	Model by Analogy
Gestalt Principles	Predict Interpretation

The Model Human Processor

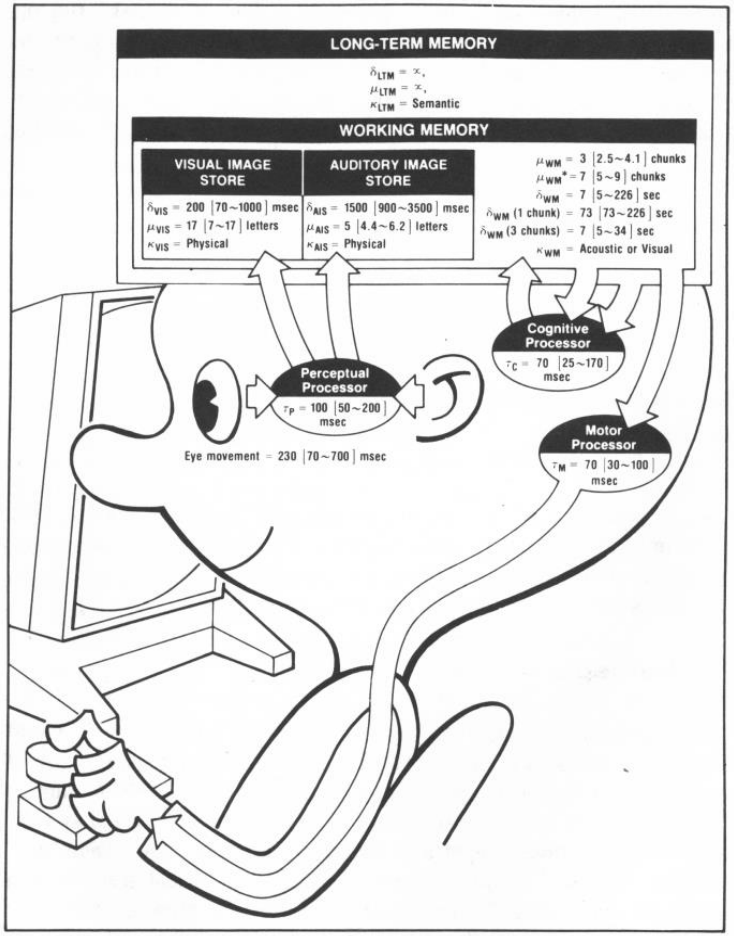

Developed by Card, Moran, & Newell (1983)

Based on empirical data

Summarizing human behavior in a manner easy to consume and act upon

Same book that named human computer interaction

The Model Human Processor

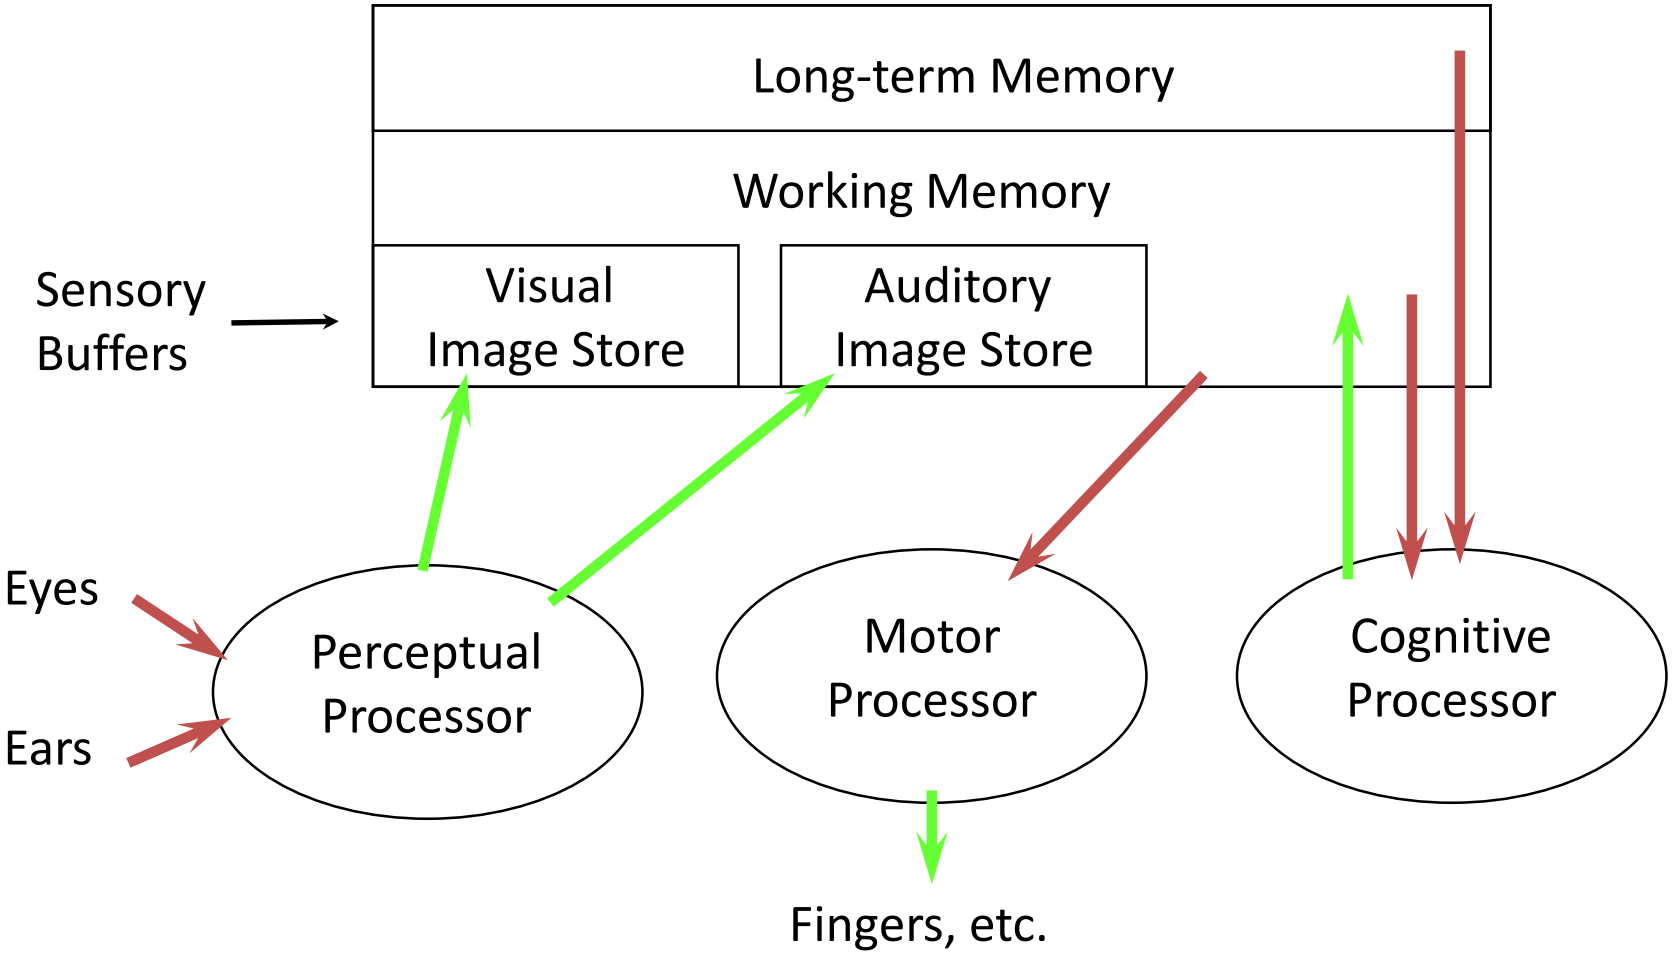

Basics of Model Human Processor

- Sometimes serial, sometimes parallel
  - Serial in action and parallel in recognition
    - Pressing key in response to light
    - Driving, reading signs, hearing all simultaneously
- Parameters
  - Processors have cycle time, about 100-200ms
  - Memories have capacity, decay time, and type

A Working Memory Experiment

BMCIACSEI

BM CIA CSE I

IBM CIA CSE

Memory

- Working memory (also known as short-term)
  - Small capacity (7 ± 2 “chunks”)
    - 6174591765 vs. (617) 459-1765
    - IBMCIACSE vs. IBM CIA CSE
  - Rapid access (~ 70ms) and decay (~200 ms)
    - Pass to LTM after a few seconds of continued storage
- Long-term memory
  - Huge (if not “unlimited”)
  - Slower access time (~100 ms) with little decay

Activation Experiment

Volunteer

Activation Experiment

Volunteer

Start saying colors you see in list of words

- When slide comes up, as fast as you can
- There will be three columns of words

Say “done” when finished

- Everyone else time how long it takes

Activation Experiment

word	word	word
word	word	word
word	word	word
word	word	word
word	word	word

Activation Experiment

Volunteer

red	green	blue
yellow	yellow	red
blue	blue	blue
green	yellow	red
red	green	green

Activation Experiment

Do it again

Say “done” when finished

ivd	olftcs	fwax
ncudgt	zjdcv	lxngyt
mkbh	xbts	cfto
bhfe	cnhdes	fwa
cnofgt	uhths	dalcrd

Activation Experiment

Do it again

Say “done” when finished

red	red	green
blue	yellow	red
green	green	green
yellow	blue	blue
blue	yellow	yellow

Model Human Processor Operation

Recognize-Act Cycle of the Cognitive Processor

On each cycle, contents in working memory initiate actions associatively linked in long-term memory

Actions modify the contents of working memory

Discrimination Principle

Retrieval is determined by candidates that exist in memory relative to retrieval cues

Interference created by strongly activated chunks

See also Freudian slips

Perceptual Causality

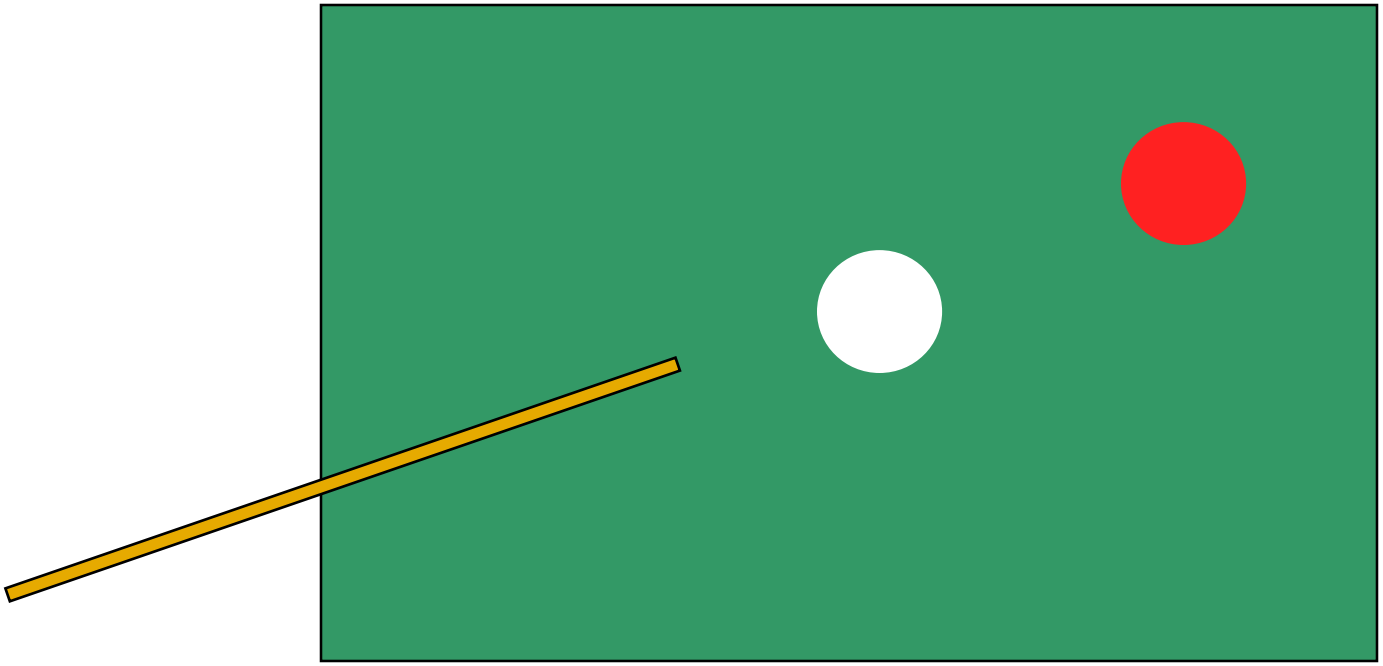

How soon must the red ball move after cue ball collides with it?

Perceptual Causality

Stimuli that occur within one cycle of the perceptual processor fuse into a single concept

Requirement

- If you want to create the perception of causality, then you need to be sufficiently responsive

Caution

- Two stimuli intended to be distinct can fuse if the first event appears to cause the other

Today

Some example models of human performance

Visual System	Biological Model
Model Human Processor	Higher-Level Model
Fitts's Law	Model by Analogy
Gestalt Principles	Predict Interpretation

Fitts's Law (1954)

- Models time to acquire targets in aimed movement
  - Reaching for a control in a cockpit
  - Moving across a dashboard
  - Pulling defective items from a conveyor belt
  - Clicking on icons using a mouse
- Very powerful, widely used
  - Holds for many circumstances (e.g., under water)
  - Allows for comparison among different experiments
  - Used both to measure and to predict

Fitts's Law (1954)

Models time to acquire targets in aimed movement

- Reaching for a control in a cockpit
- Moving across a dashboard
- Pulling defective items from a conveyor belt
- Clicking on icons using a mouse

Very powerful, widely used

- Holds for many circumstances (e.g., under water)
- Allows for comparison among different experiments
- Used both to measure and to predict

James's use of 's is correct,
but most people say Fitts' Law

Fitts's Law (1954)

Models time to acquire targets in aimed movement

- Reaching for a control in a cockpit
- Moving across a dashboard
- Pulling defective items from a conveyor belt
- Clicking on icons using a mouse

Very powerful, widely used

- Holds for many circumstances (e.g., under water)
- Allows for comparison among different experiments
- Used both to measure and to predict

https://en.wikipedia.org/wiki/Fitts's_law

Reciprocal Point-Select Task

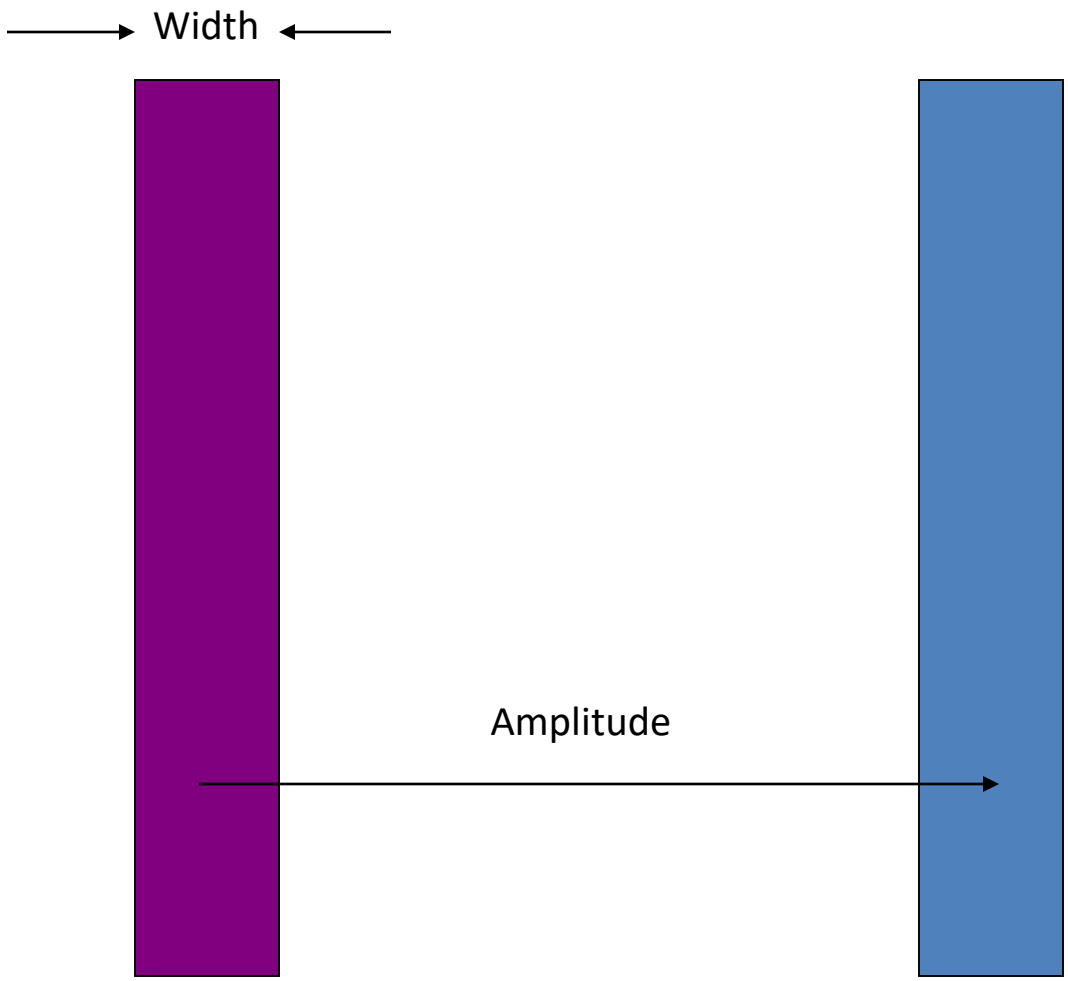

Closed Loop versus Open Loop

What is closed loop motion?

What is open loop motion?

Closed Loop versus Open Loop

What is closed loop motion?

- Rapid aimed movements with feedback correction
- Fitts's law models this

What is open loop motion?

- Ballistic movements without feedback correction
- Example: Throwing a dart
- See Schmidt's Law (1979)

Model by Analogy

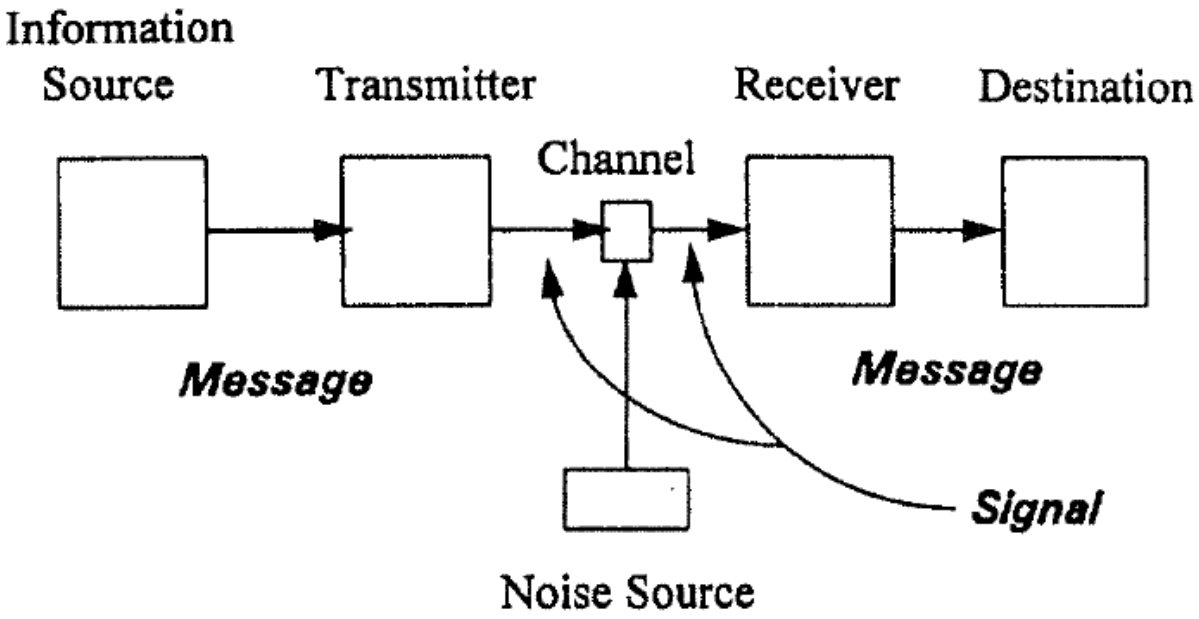

Analogy to Information Transmission
Shannon and Weaver, 1959

Model by Analogy

The Interface

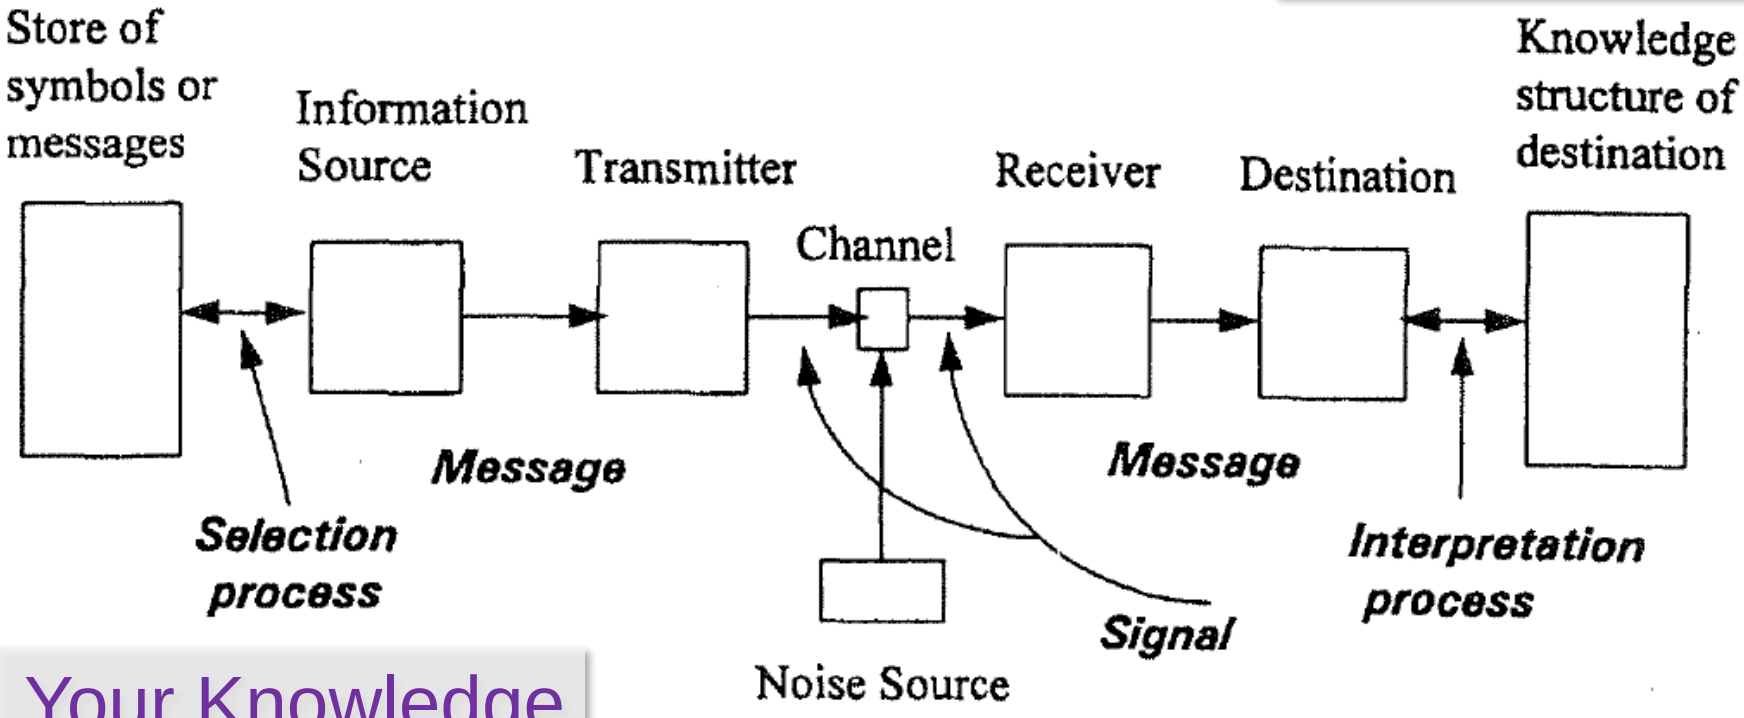

Your Knowledge

Analogy to Information Transmission
Shannon and Weaver, 1959

Fitts's Law

$$MT = a + b \log_2(A / W + 1)$$

What kind of equation does this remind you of?

Fitts's Law

$MT = a + b \log_2(A / W + 1)$

What kind of equation does this remind you of?

$y = mx + b$

$MT = a + bx$, where $x = \log_2(A / W + 1)$

x is called the Index of Difficulty (ID)

As "A" goes up, ID goes up

As "W" goes up, ID goes down

Index of Difficulty (ID)

log2(A / W + 1)

Fitts's Law claims that the time to acquire a target increases linearly with the log of the ratio of the movement distance (A) to target width (W)

Why is it significant that it is a ratio?

Index of Difficulty (ID)

log2(A / W + 1)

- Fitts's Law claims that the time to acquire a target increases linearly with the log of the ratio of the movement distance (A) to target width (W)

Why is it significant that it is a ratio?

- Units of A and W don't matter
- Allows comparison across experiments

Index of Difficulty (ID)

log2(A / W + 1)

- Fitts's Law claims that the time to acquire a target increases linearly with the log of the ratio of the movement distance (A) to target width (W)

ID units typically in "bits"

- Because of association with information capacity and somewhat arbitrary use of base-2 logarithm

Index of Performance (IP)

MT = a + b log2(A / W + 1)

- b is slope

1/b is called Index of Performance (IP)

- If MT is in seconds, IP is in bits/second

Also called “throughput” or “bandwidth”

- Consistent with analogy of the interaction as an information channel from human to target

A Fitts’s Law Experiment

Experimental Design and Analysis

Factorial Design

- Experiment with more than one manipulation

Within vs. Between Participant Design

- Statistical power versus potential confounds

Carryover Effects and Counterbalanced Designs

A	B	C	D
C	D	A	B
D	C	B	A
B	A	D	C

Latin Square Design

“Beating” Fitts’s law

It is the law, right?

$$MT = a + b \log_2(A / W + 1)$$

So how can we reduce movement time?

- Reduce A
- Increase W

Fitts's Law Related Techniques

Put targets closer together

Make targets bigger

Make cursor bigger

- Area cursors
- Bubble cursor

Use impenetrable edges

Fitts's Law Examples

Which will be faster on average?

Pop-up Linear Menu

Today
Sunday
Monday
Tuesday
Wednesday
Thursday
Friday
Saturday

Pop-up Pie Menu

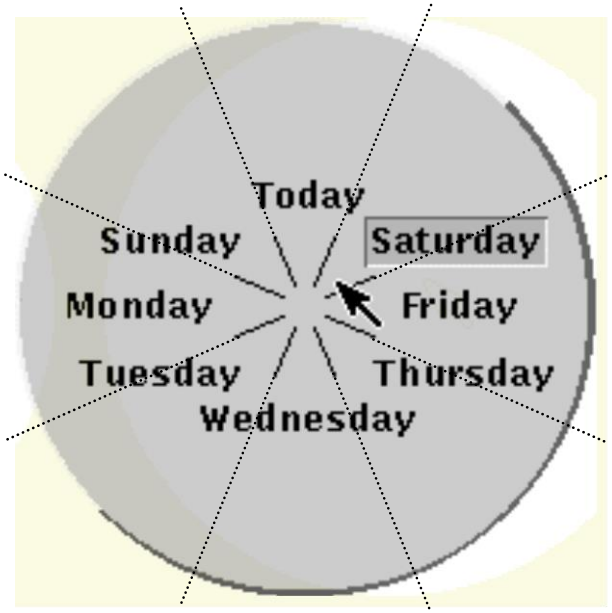

Pie Menus in Use

The Sims

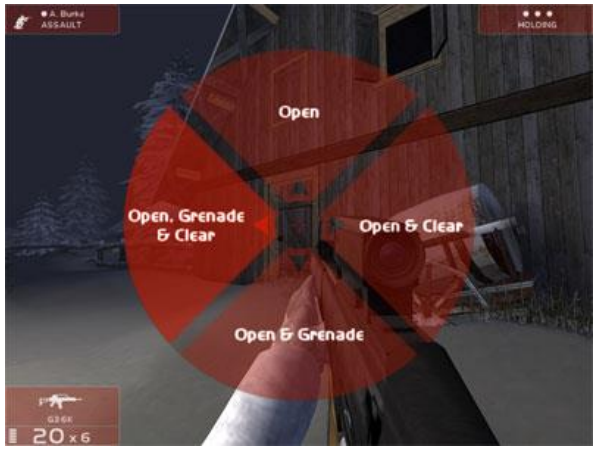

Rainbow 6

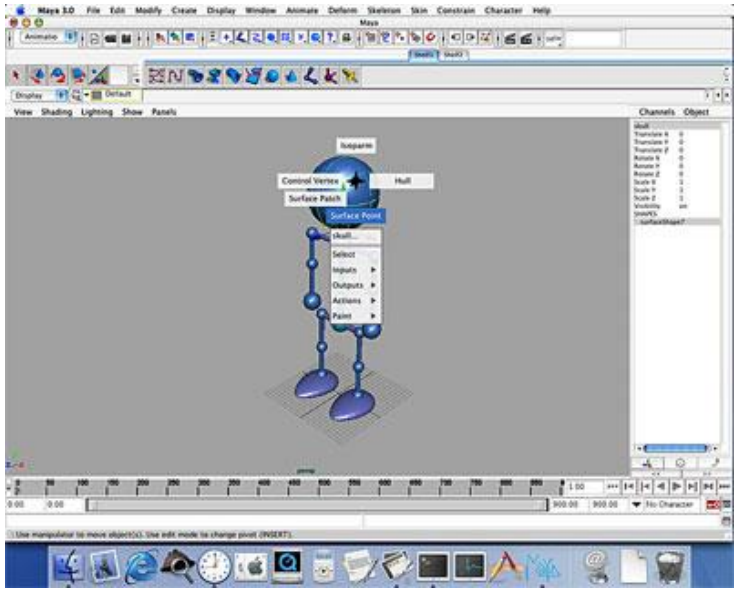

Maya

Fitts's Law Examples

Which will be faster on average?

Pop-up Linear Menu

Today
Sunday
Monday
Tuesday
Wednesday
Thursday
Friday
Saturday

Pop-up Pie Menu

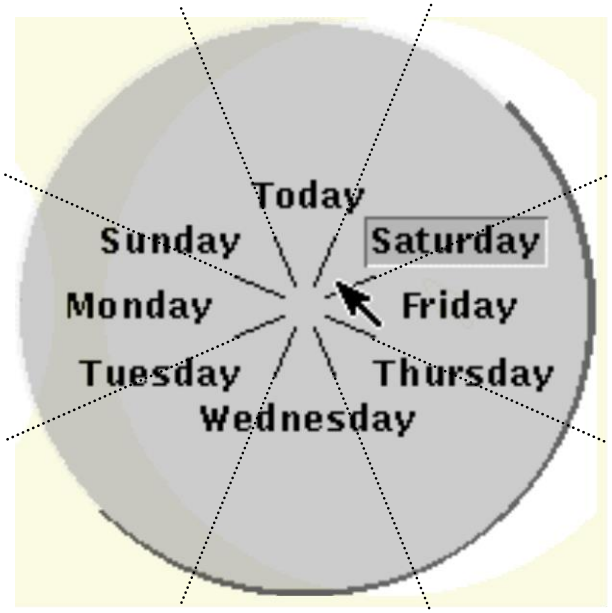

What about adaptive menus?

Fitts's Law in Windowing

Windows 95: Missed by a pixel
Windows XP: Good to the last drop

Macintosh Menu

Fitts's Law in MS Office 2007

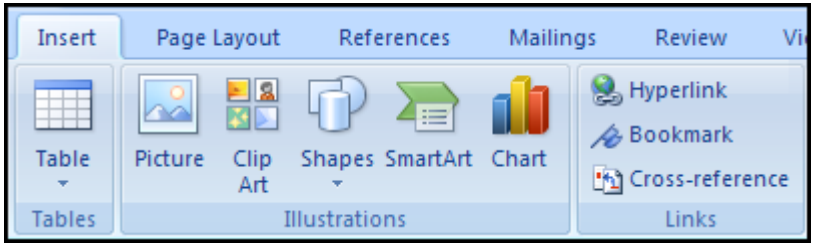

Larger, labeled controls
can be clicked more quickly

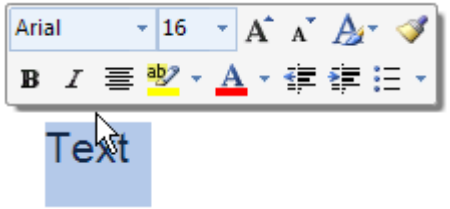

Mini toolbar is close to the cursor

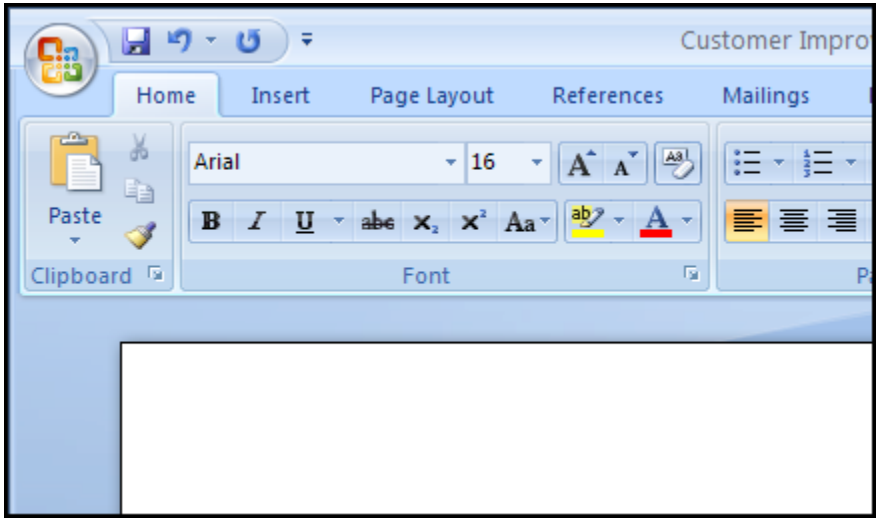

Magic Corner:
Office Button in the upper-left corner

Bubble Cursor

Grossman and Balakrishnan, 2005

Bubble Cursor

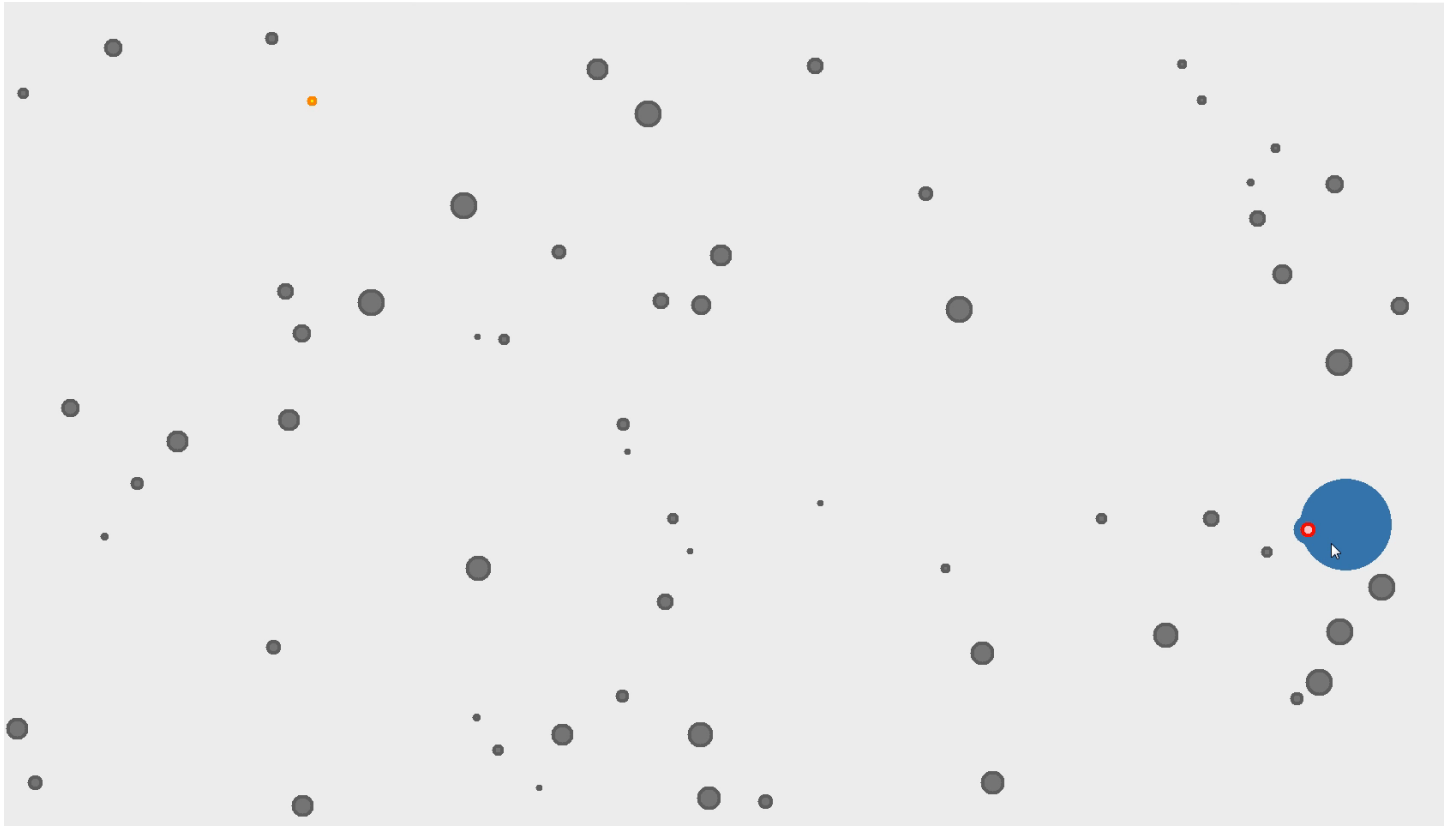

Grossman and Balakrishnan, 2005

Bubble Cursor with Prefab

Dixon et al, 2012

Bubble Cursor with Prefab

Dixon et al, 2012

Fitts's Law and Keyboard Layout

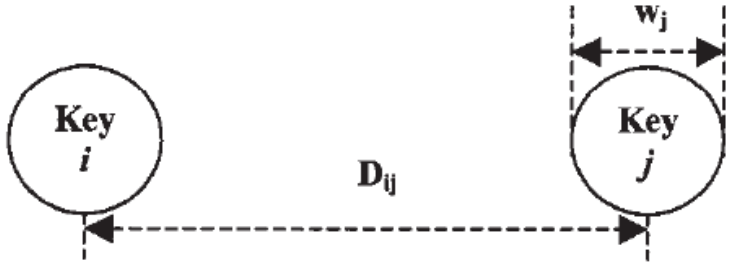

$$MT = a + b\log_2\left(\frac{D_{ij}}{W_j} + 1\right),$$

$$t = \sum_{i=1}^{27}\sum_{j=1}^{27} \frac{P_{ij}}{IP}\left[log_2\left(\frac{D_{ij}}{W_j} + 1\right)\right],$$

Zhai et. al (2002) pose stylus keyboard layout as an optimization of all key pairs, weighted by language frequency

Hooke's Keyboard

Optimizes a system of springs

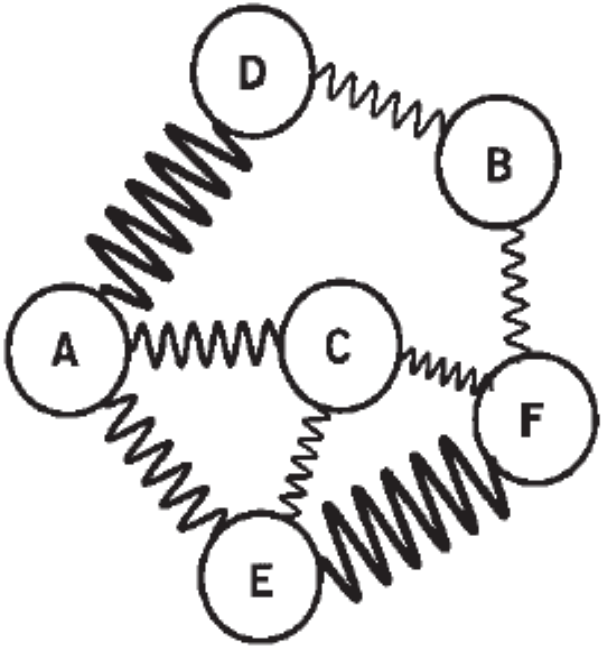

Metropolis Keyboard

Random walk minimizing scoring function

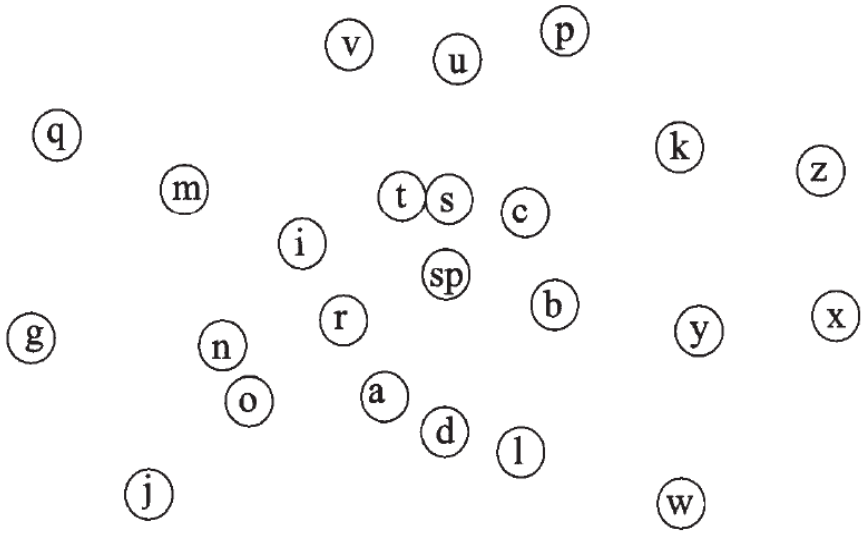

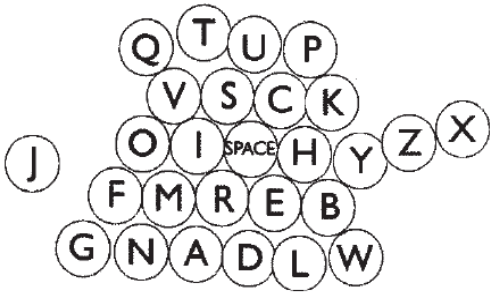

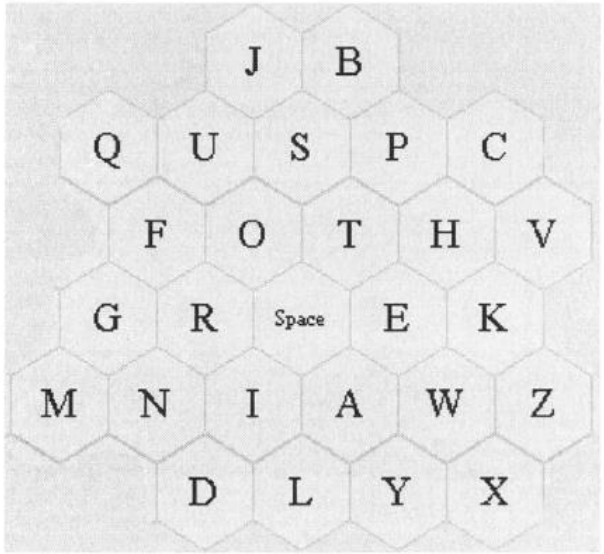

Considering Multiple Space Keys

FITALY Keyboard

Textware Solutions

Z	V	C	H	W	K
F	I	T	A	L	Y
		N	E		
G	D	O	R	S	B
Q	J	U	M	P	X

OPTI Keyboard

MacKenzie and Zhang 1999

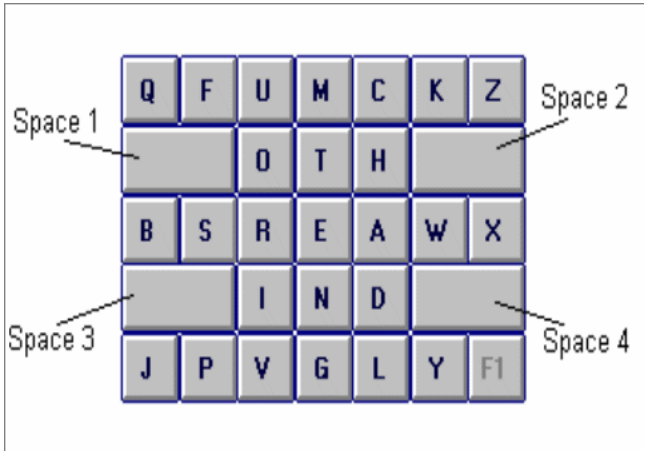

Considering Multiple Space Keys

FITALY Keyboard

Textware Solutions

Z	V	C	H	W	K
F	I	T	A	L	Y
		N	E		
G	D	O	R	S	B
Q	J	U	M	P	X

OPTI Keyboard

MacKenzie and Zhang 1999

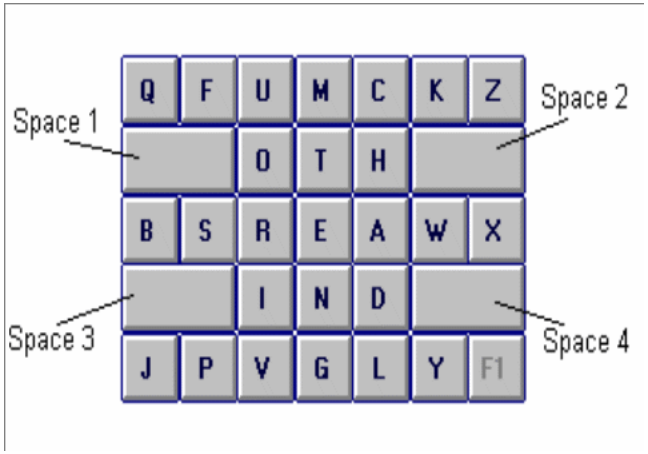

Correct choice of space key becomes important

Requires planning head to be optimal

ATOMIK Keyboard

Optimized keyboard, adjusted for early letters in upper left and later letters in lower right

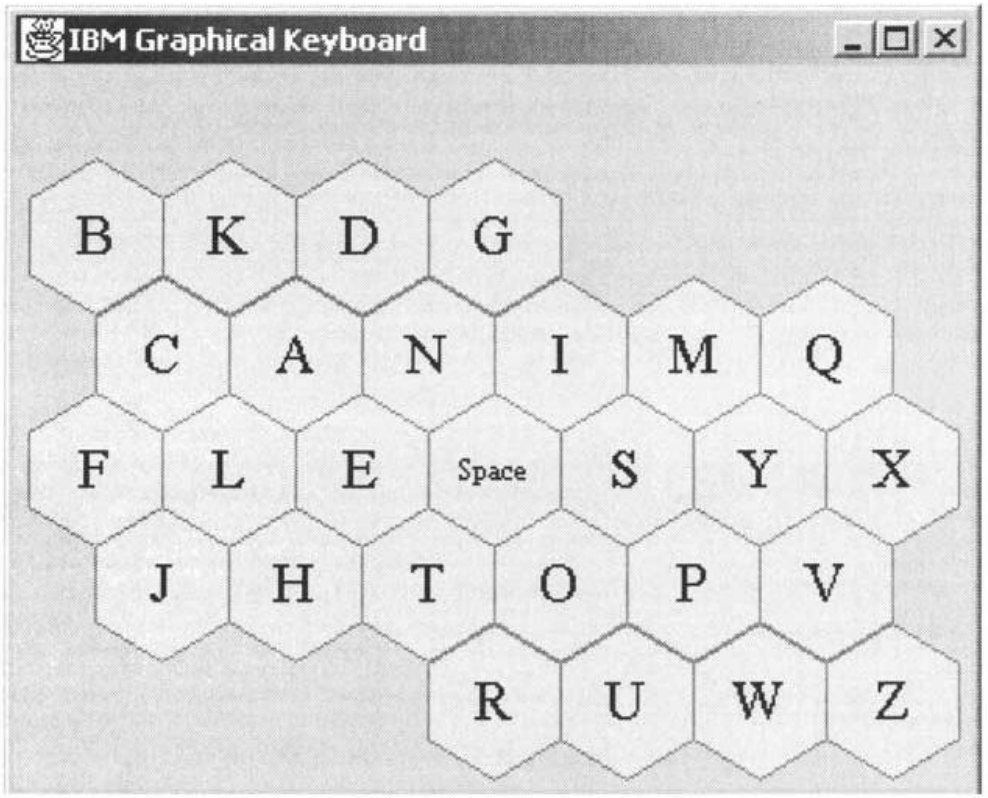

Using Motor Ability in Design

Pointing

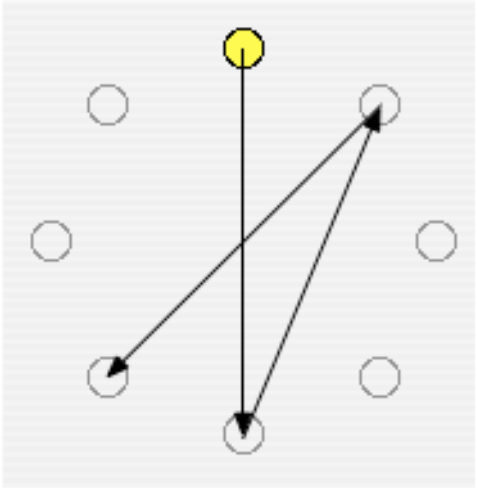

Dragging

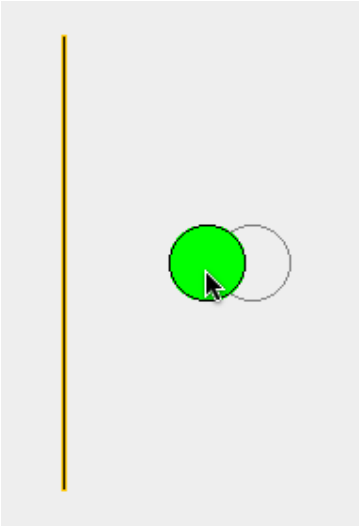

List Selection

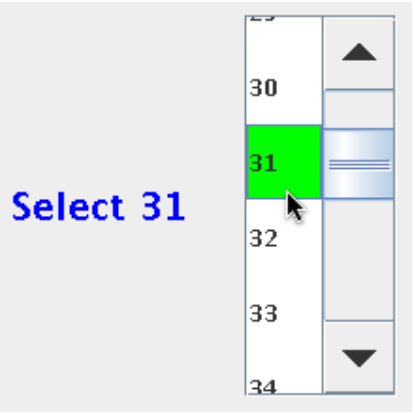

Gajos et al 2007

Interface Generation As Optimization

$(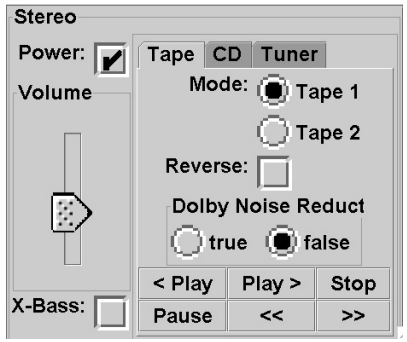

) =

Estimated task completion time

Manufacturer Interface

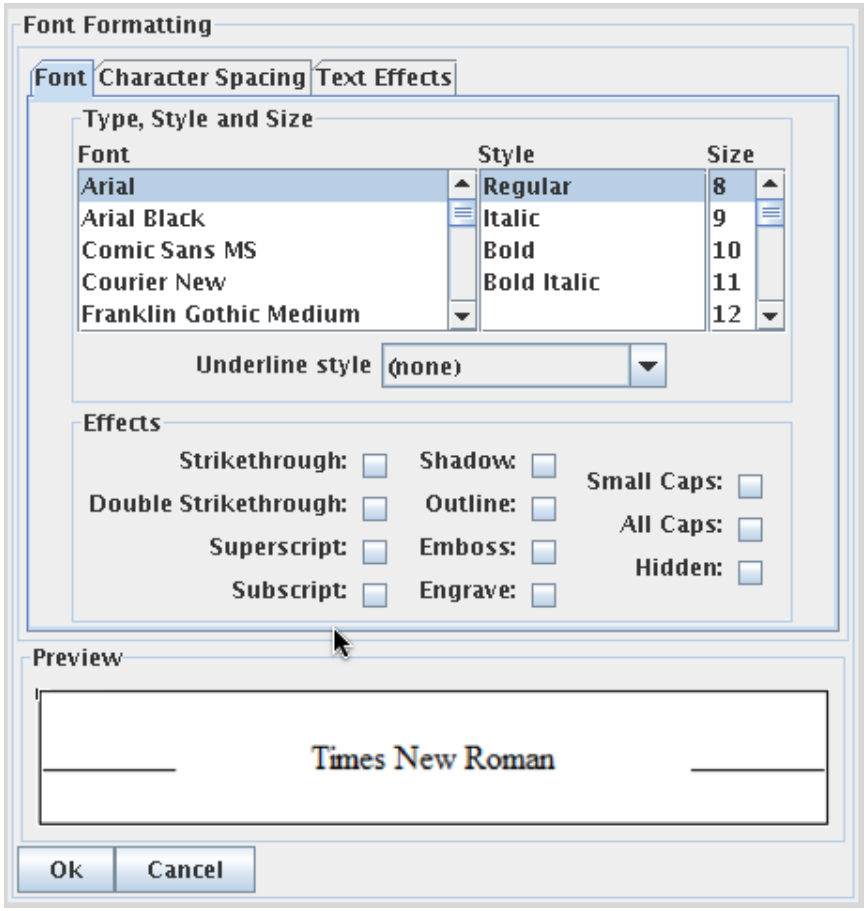

Person with Cerebral Palsy

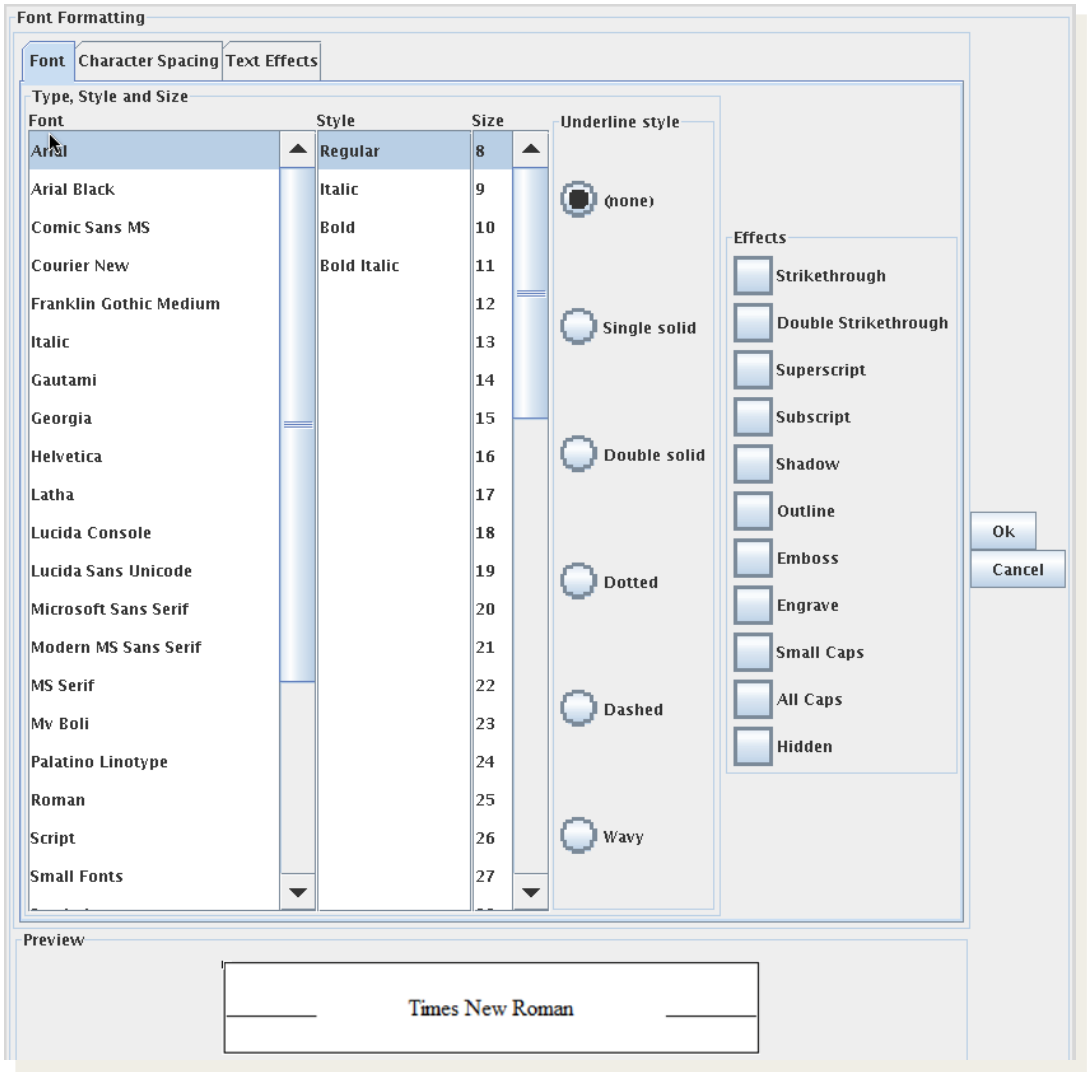

Person with Muscular Dystrophy

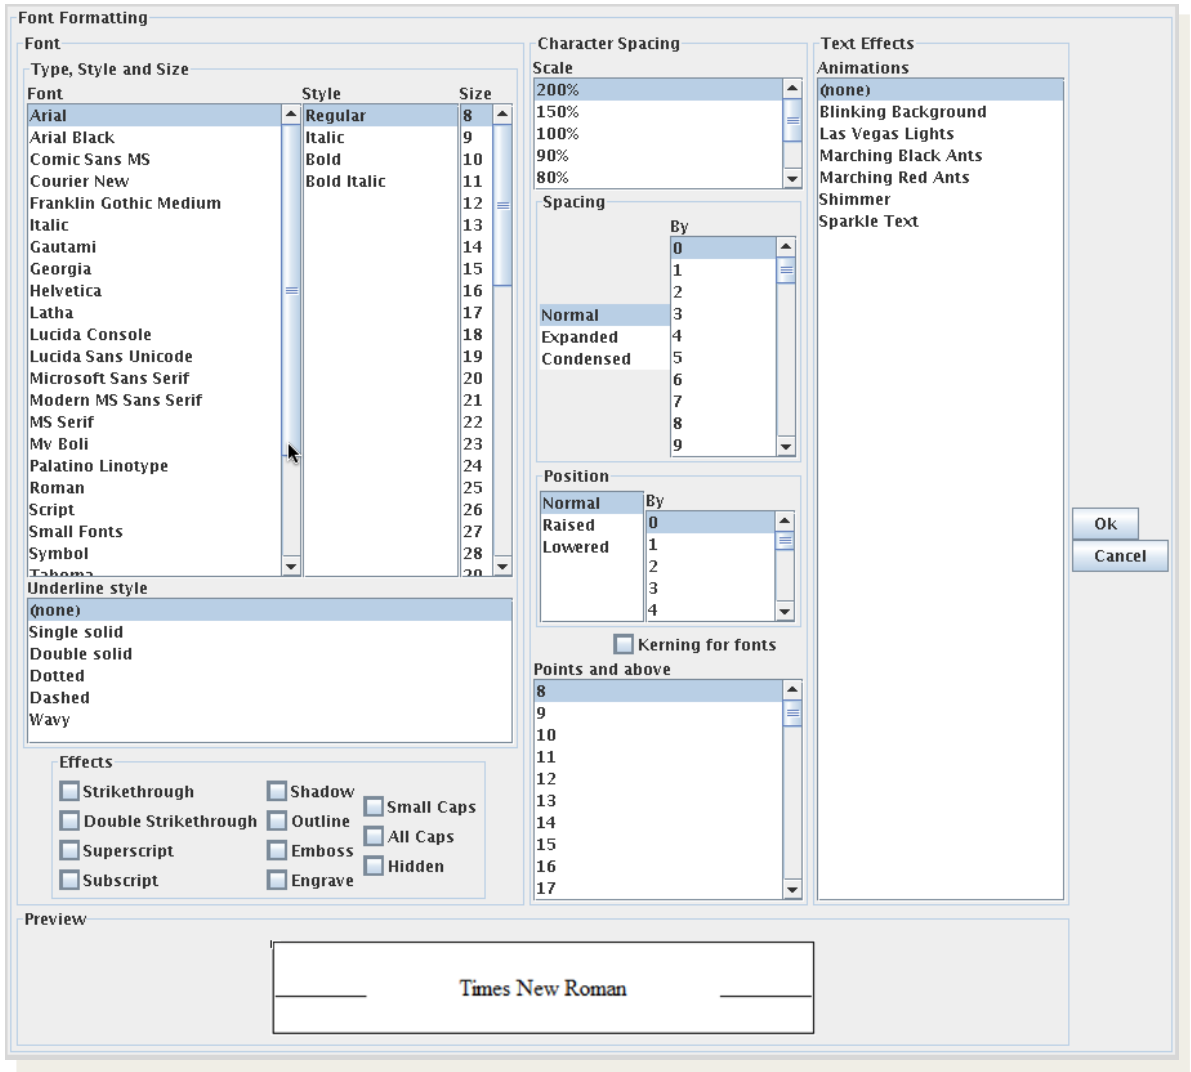

Interface Generation As Optimization

In a study with 11 participants with diverse motor impairments:

Consistently faster with generated interfaces (26%)

Fewer errors with generated interfaces (73% fewer)

Strongly preferred generated interfaces

Fitts's Law Related Techniques

Gravity Fields

- Pointer gets close, gets "sucked in" to target

Sticky Icons

- When within target, pointer "sticks"

Constrained Motion

- Snapping,
  holding Shift to limit degrees of movement

Target Prediction

- Determine likely target,
  move it nearer or expand it

Fitts's Law, Edge Targets, and Touch

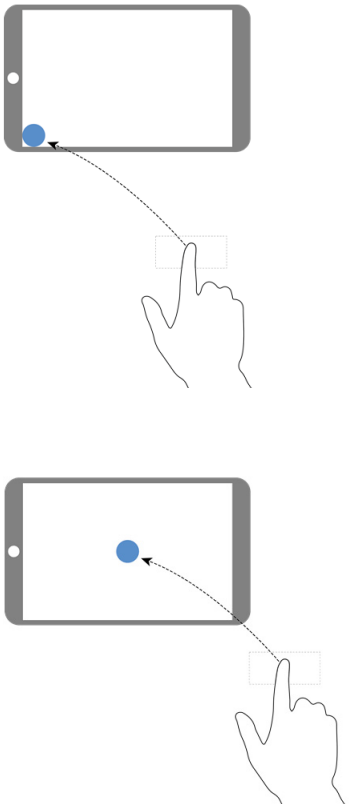

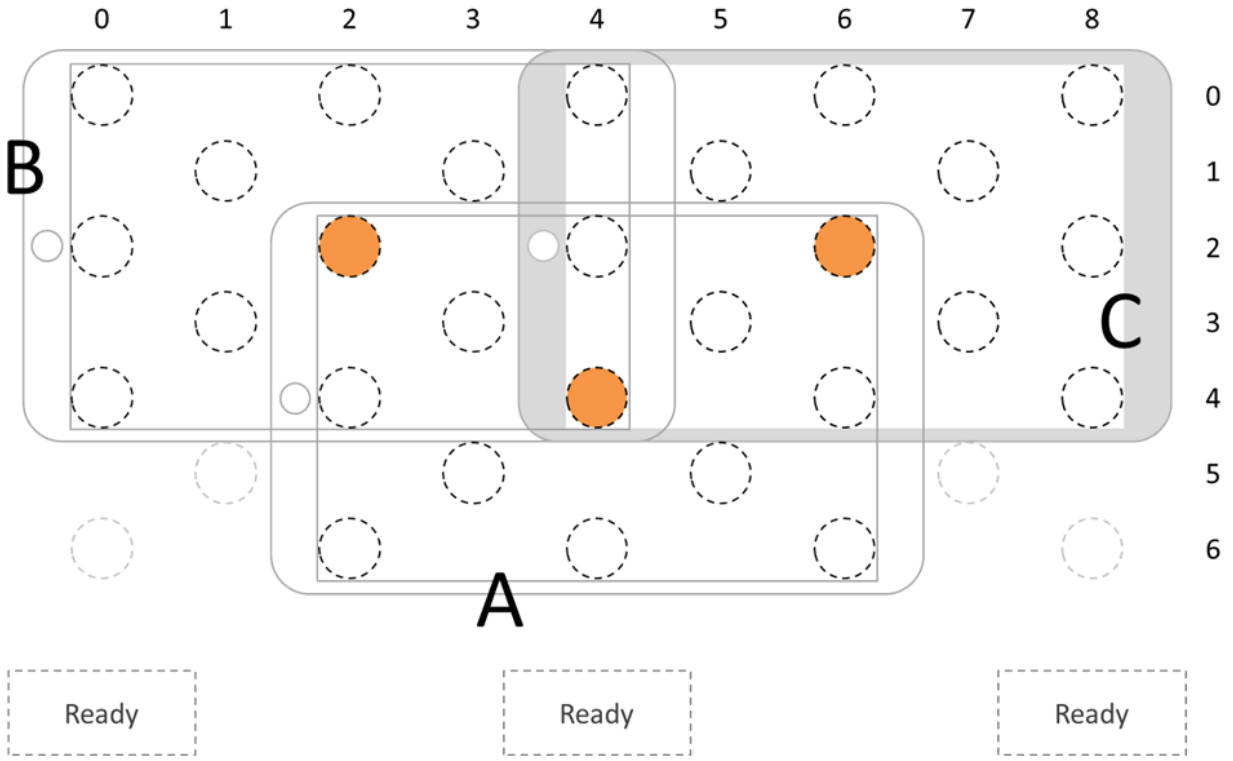

Fitts's Law, Edge Targets, and Touch

Avrahami finds edge targets are actually slower with touch devices, at same physical location

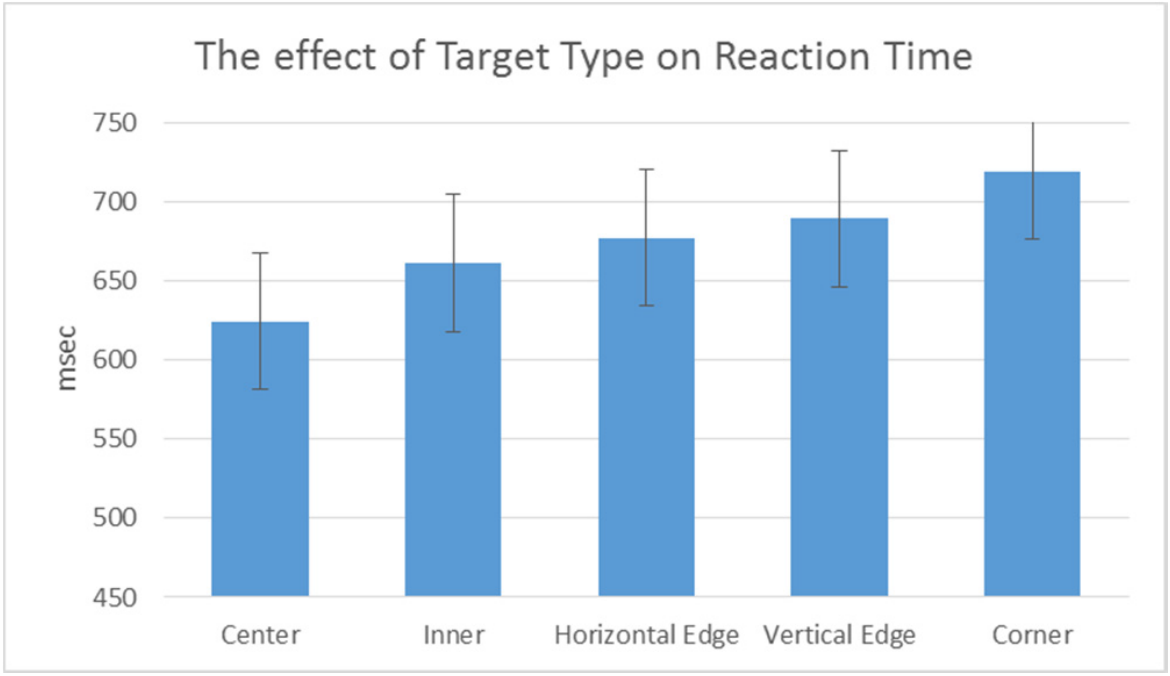

Are people border cautious?

Today

Some example models of human performance

Visual System	Biological Model
Model Human Processor	Higher-Level Model
Fitts's Law	Model by Analogy
Gestalt Principles	Predict Interpretation

Gestalt Psychology

Described loosely in the context of this lecture and associated work, not a real definition

Perception is neither bottom-up nor top-down, rather both inform the other as a whole

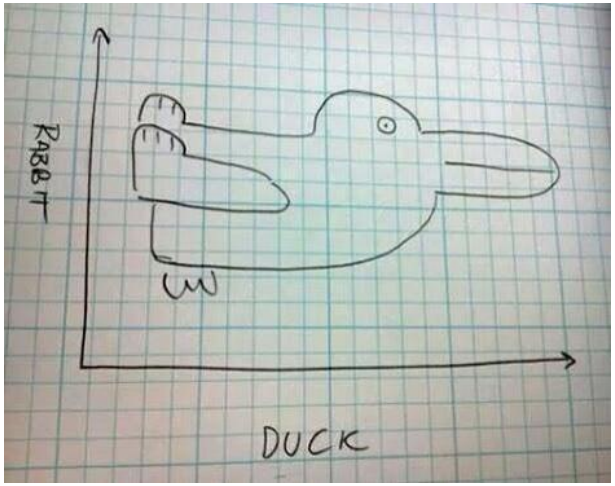

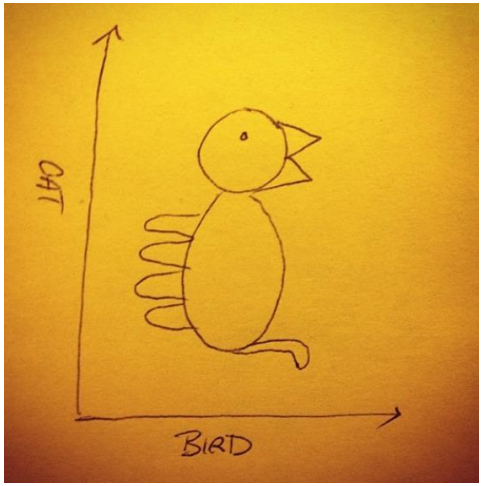

Gestalt Psychology

You can still see the dog…

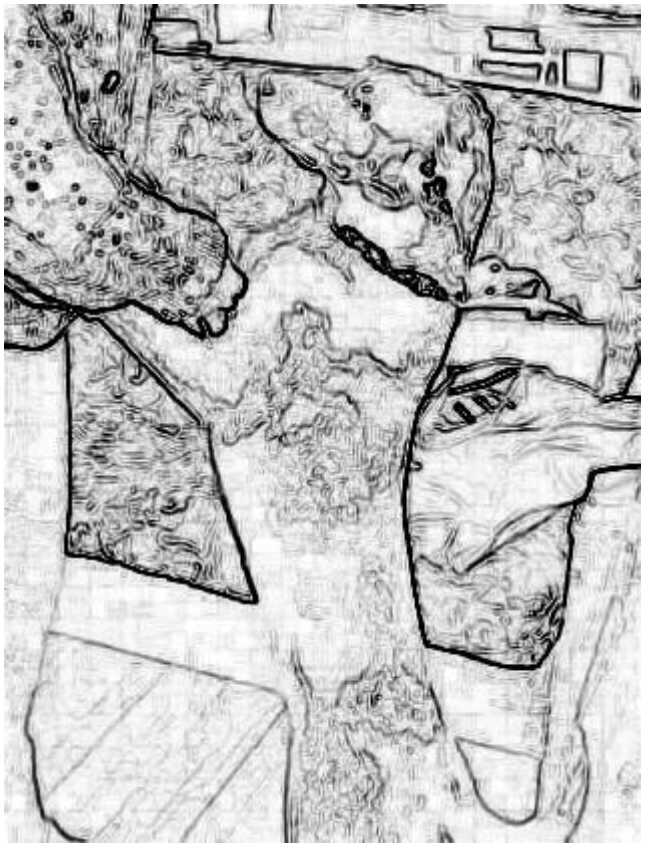

Gestalt Psychology

You can still see the dog…

Spinning Wheel

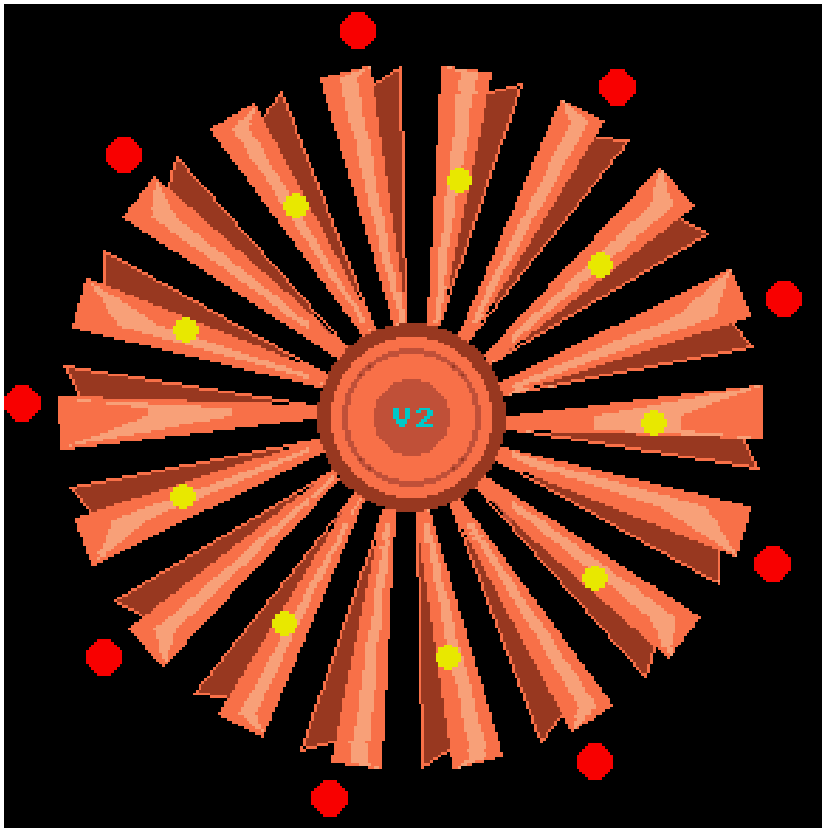

Follow the red dots vs follow the yellow dots

Blind Spot Interpolation



Use right eye, look at letters

Painful Image Warning

Difficult to Reconcile

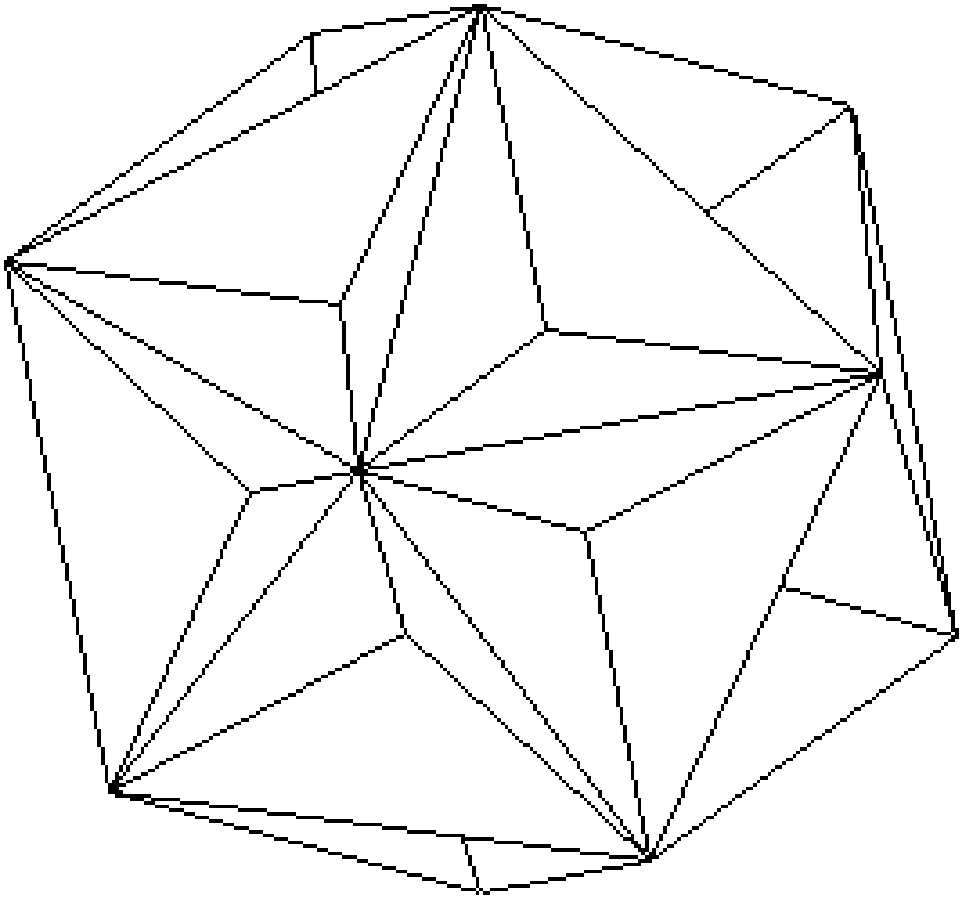

Proximity

Objects close to each other form a group

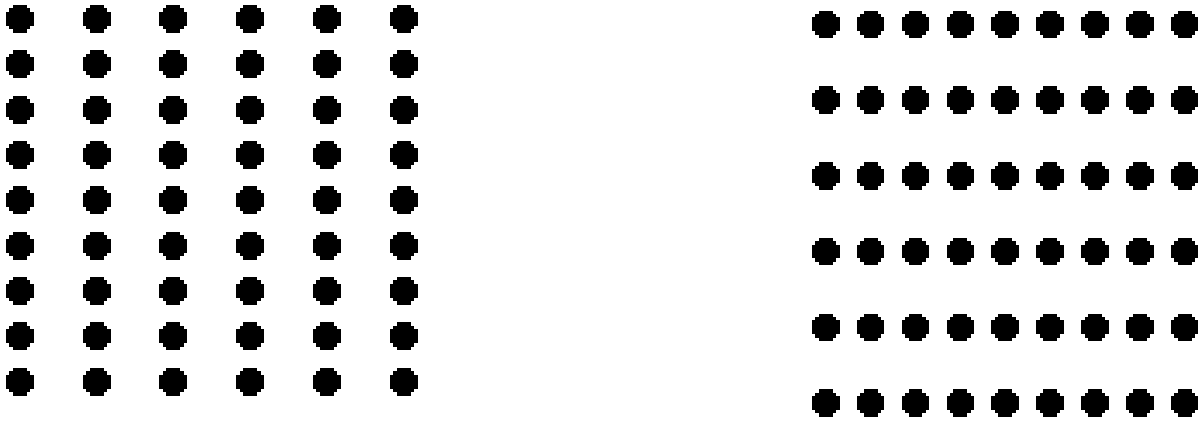

Proximity

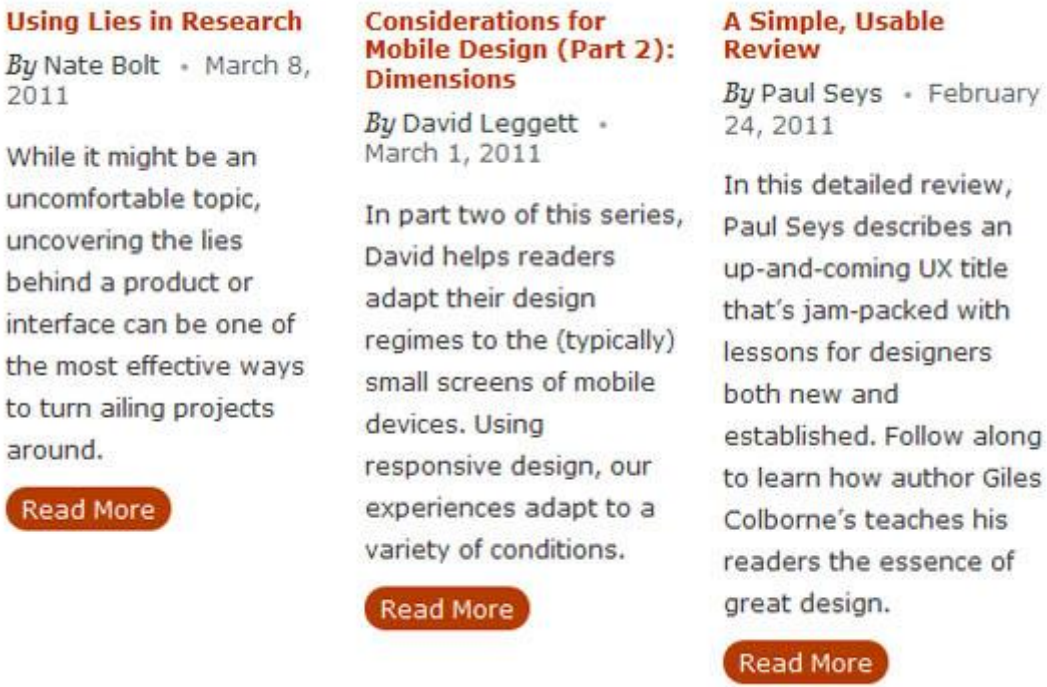
Using Lies in Research
By Nate Bolt • March 8, 2011
While it might be an uncomfortable topic, uncovering the lies behind a product or interface can be one of the most effective ways to turn ailing projects around.
Read More
Considerations for Mobile Design (Part 2): Dimensions
By David Leggett • March 1, 2011
In part two of this series, David helps readers adapt their design regimes to the (typically) small screens of mobile devices. Using responsive design, our experiences adapt to a variety of conditions.
Read More
A Simple, Usable Review
By Paul Seys • February 24, 2011
In this detailed review, Paul Seys describes an up-and-coming UX title that's jam-packed with lessons for designers both new and established. Follow along to learn how author Giles Colborne's teaches his readers the essence of great design.
Read More

Proximity

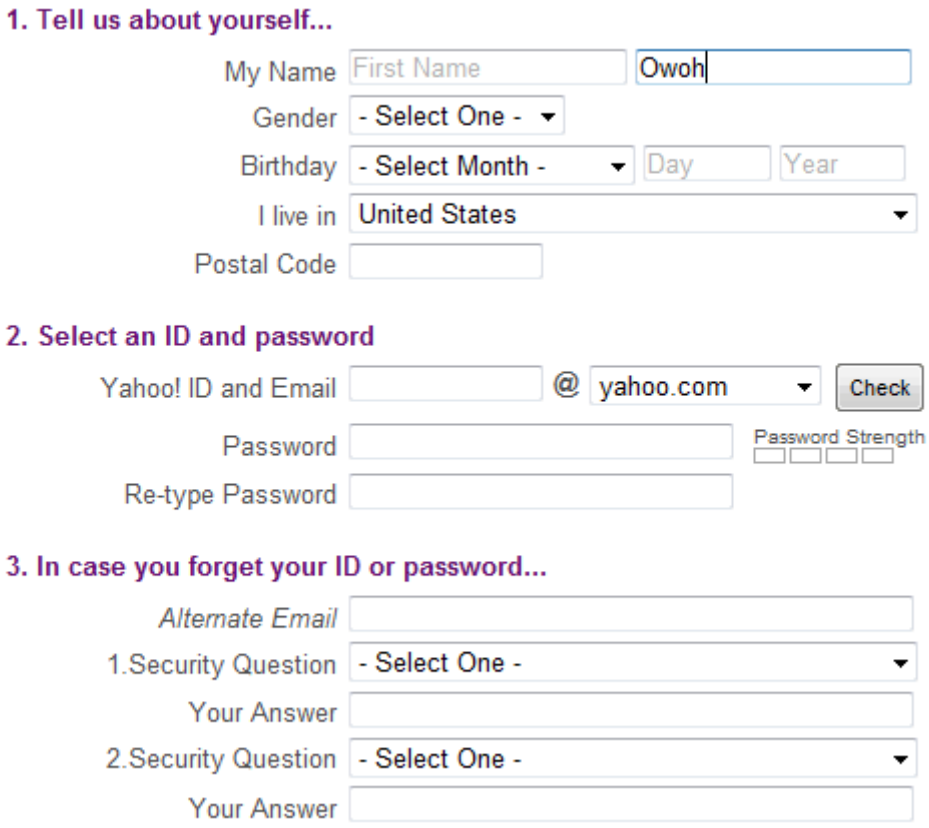
1. Tell us about yourself...
My Name
First Name
Owoh
Gender
- Select One -
Birthday
- Select Month -
Day
Year
I live in
United States
Postal Code
2. Select an ID and password
Yahoo! ID and Email
@
yahoo.com
Check
Password
Password Strength
Re-type Password
3. In case you forget your ID or password...
Alternate Email
1.Security Question
- Select One -
Your Answer
2.Security Question
- Select One -
Your Answer

Similarity

Objects that are similar form a group

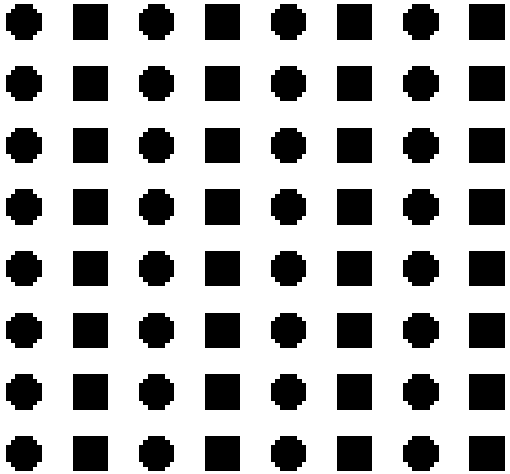

Similarity

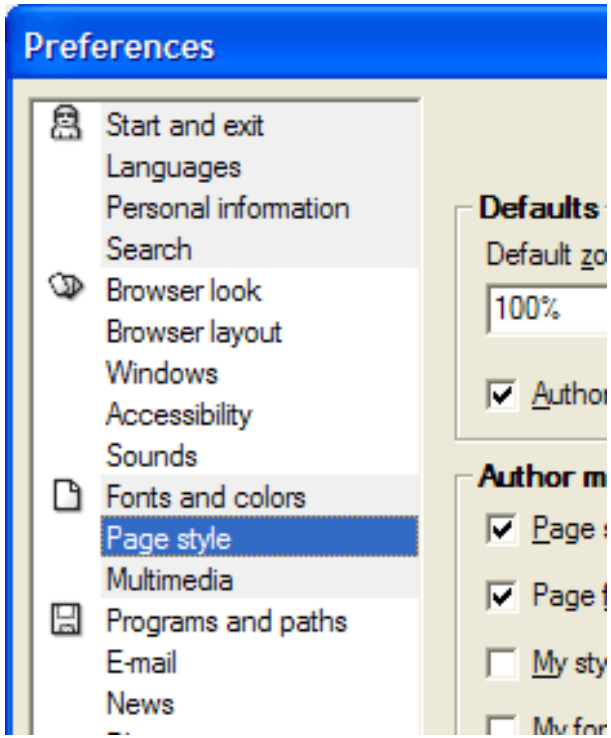
Preferences
Start and exit
Languages
Personal information
Search
Browser look
Browser layout
Windows
Accessibility
Sounds
Fonts and colors
Page style
Multimedia
Programs and paths
E-mail
News
Defaults
Default zo
100%
Author
Author m
Page
Page
My sty

Proximity and Similarity

Proximity and Similarity

After discovering that one of these accesses a menu, people will expect they all access a menu. They are the same.

Closure

Even incomplete objects are perceived as whole

- Increases regularity of stimuli

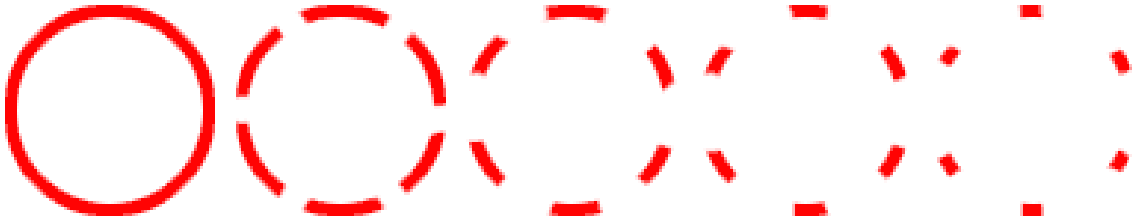

Closure

The Sims

IBM

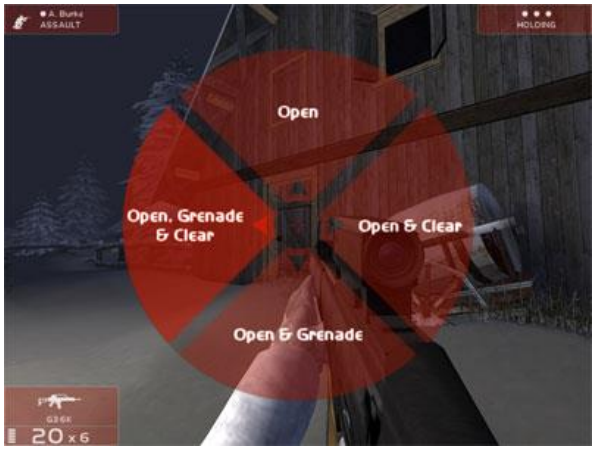

Rainbow 6

Symmetry

Objects are perceived as symmetrical and forming around a center point

If you fight symmetry, be sure you have a reason

Continuity

Objects perceived as grouped when they align

- Remain distinct even with overlap
- Preferred over abrupt directional changes

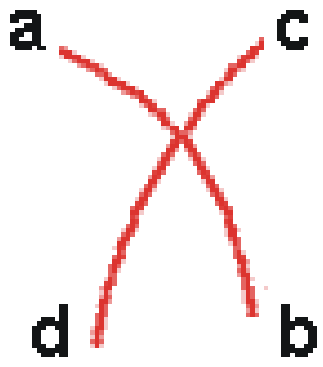

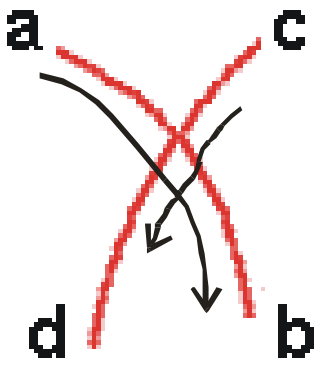

what most people see

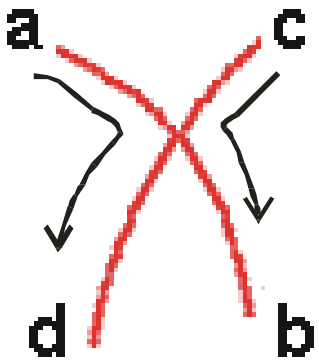

not this

Continuity


Met Concept7 realiseert Anderzorg toppositie in klanttevredenheid

Models from Different Perspectives

Some example models of human performance

Visual System	Biological Model
Model Human Processor	Higher-Level Model
Fitts's Law	Model by Analogy
Gestalt Principles	Predict Interpretation

CSE 440: Introduction to HCI

User Interface Design, Prototyping, and Evaluation

Lecture 12:
Human Performance

Tuesday / Thursday
12:00 to 1:20

James Fogarty
Kailey Chan
Dhruv Jain
Nigini Oliveira
Chris Seeds
Jihoon Suh

PAUL G. ALLEN SCHOOL
OF COMPUTER SCIENCE & ENGINEERING

DESIGN
USE
BUILD