

Database System Internals Architecture

Paul G. Allen School of Computer Science and Engineering
University of Washington, Seattle

Announcements

- Room temperature being looked into
- Lab 1 part 1 is due on Monday at 11pm
 - Lab 1 in full is due on January 17th
 - “git pull upstream master” before building
 - Remember to git commit and git push often!
 - In Thursday section we will introduce the SimpleDB repo and structure
- HW1 is due next week on Friday
 - Print out PDF and hand in completed version
- 544M first paper review is also due next week
 - Can hand in the report to me in class
 - Deadlines are flexible for graduate readings

What we already know...

- **Database** = collection of related files
- **DBMS** = program that manages the database

What we already know...


- **Data models:** relational, semi-structured (XML), graph (RDF), key-value pairs
- **Relational model:** defines only the logical model, and does not define a physical storage of the data

What we already know...


Relational Query Language:

- **Set-at-a-time**: instead of tuple-at-a-time
- **Declarative**: user says what they want and not how to get it
- **Query optimizer**: from *what* to *how*


How to Implement a Relational DBMS?

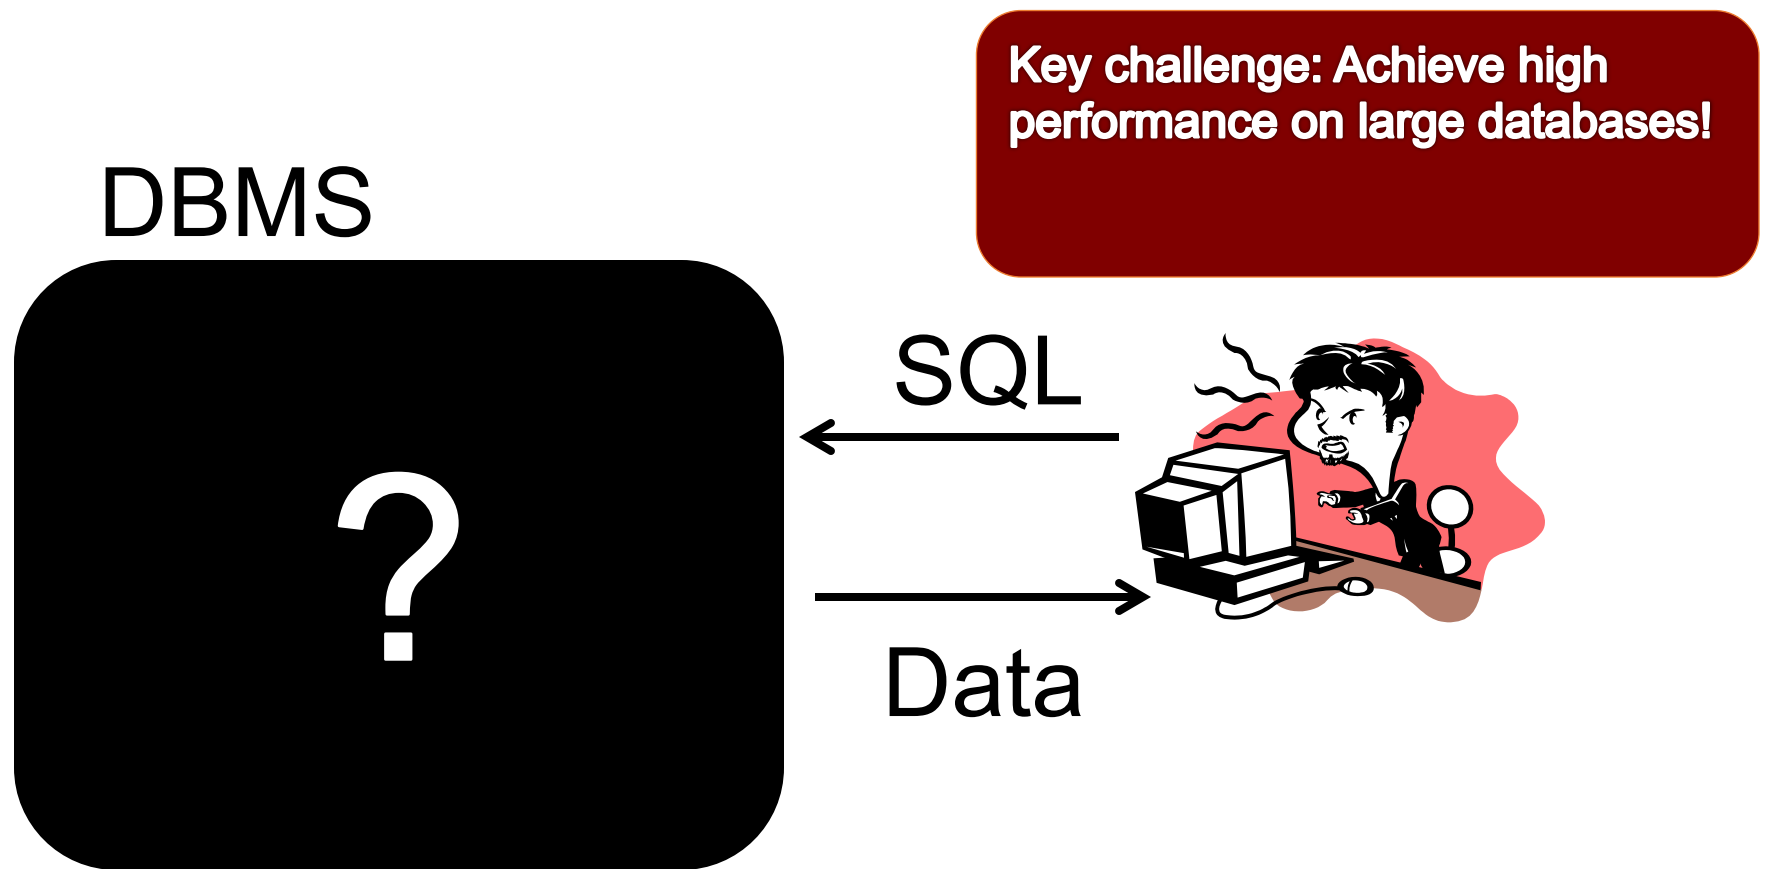

DBMS Architecture

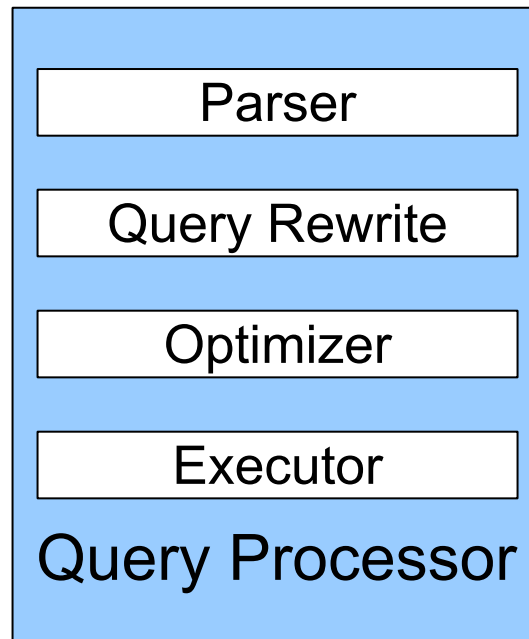


DBMS Architecture

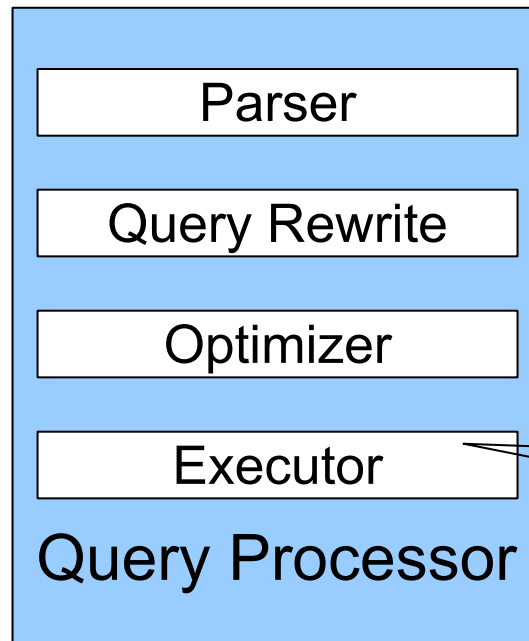


We will fill in
implementation


DBMS Architecture

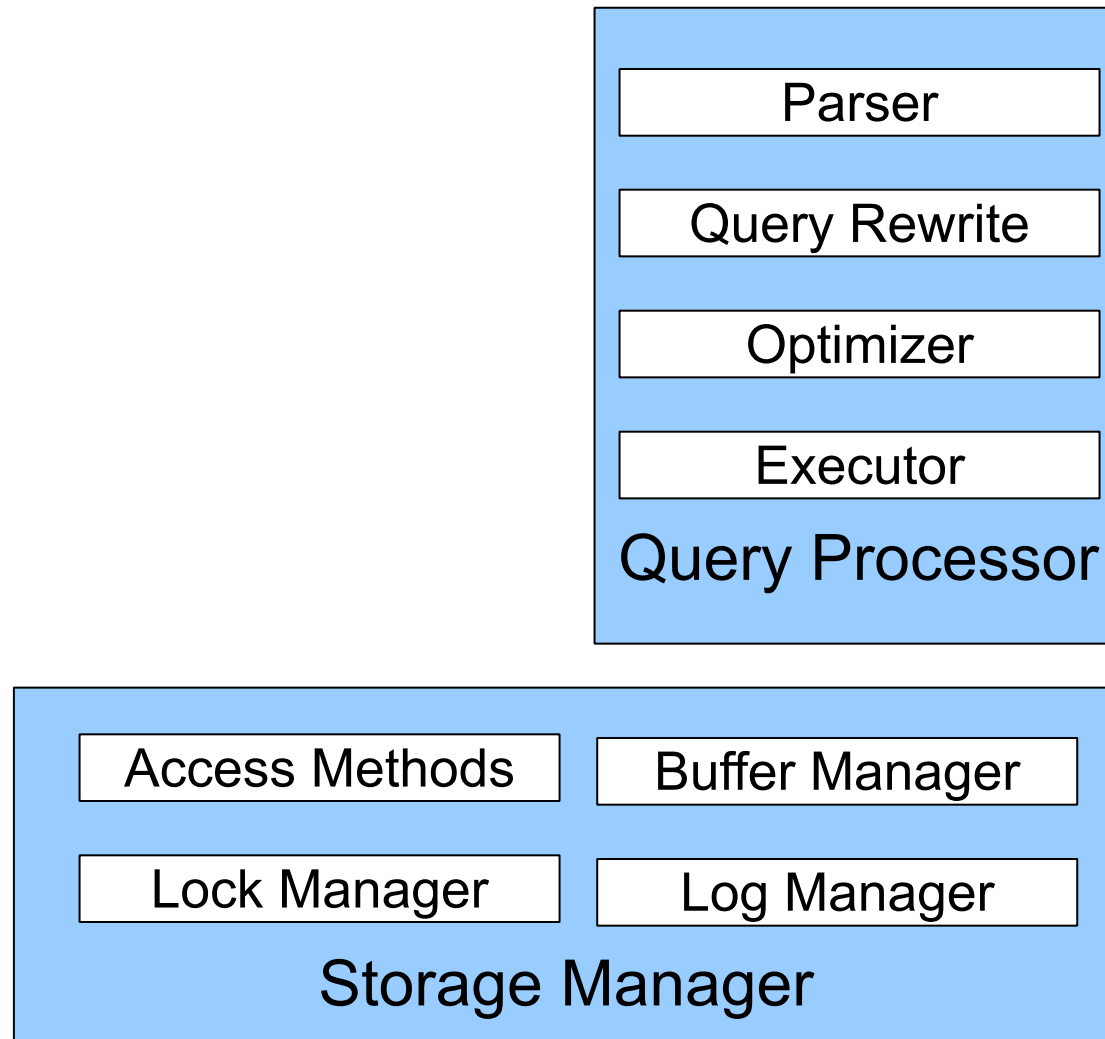


DBMS Architecture

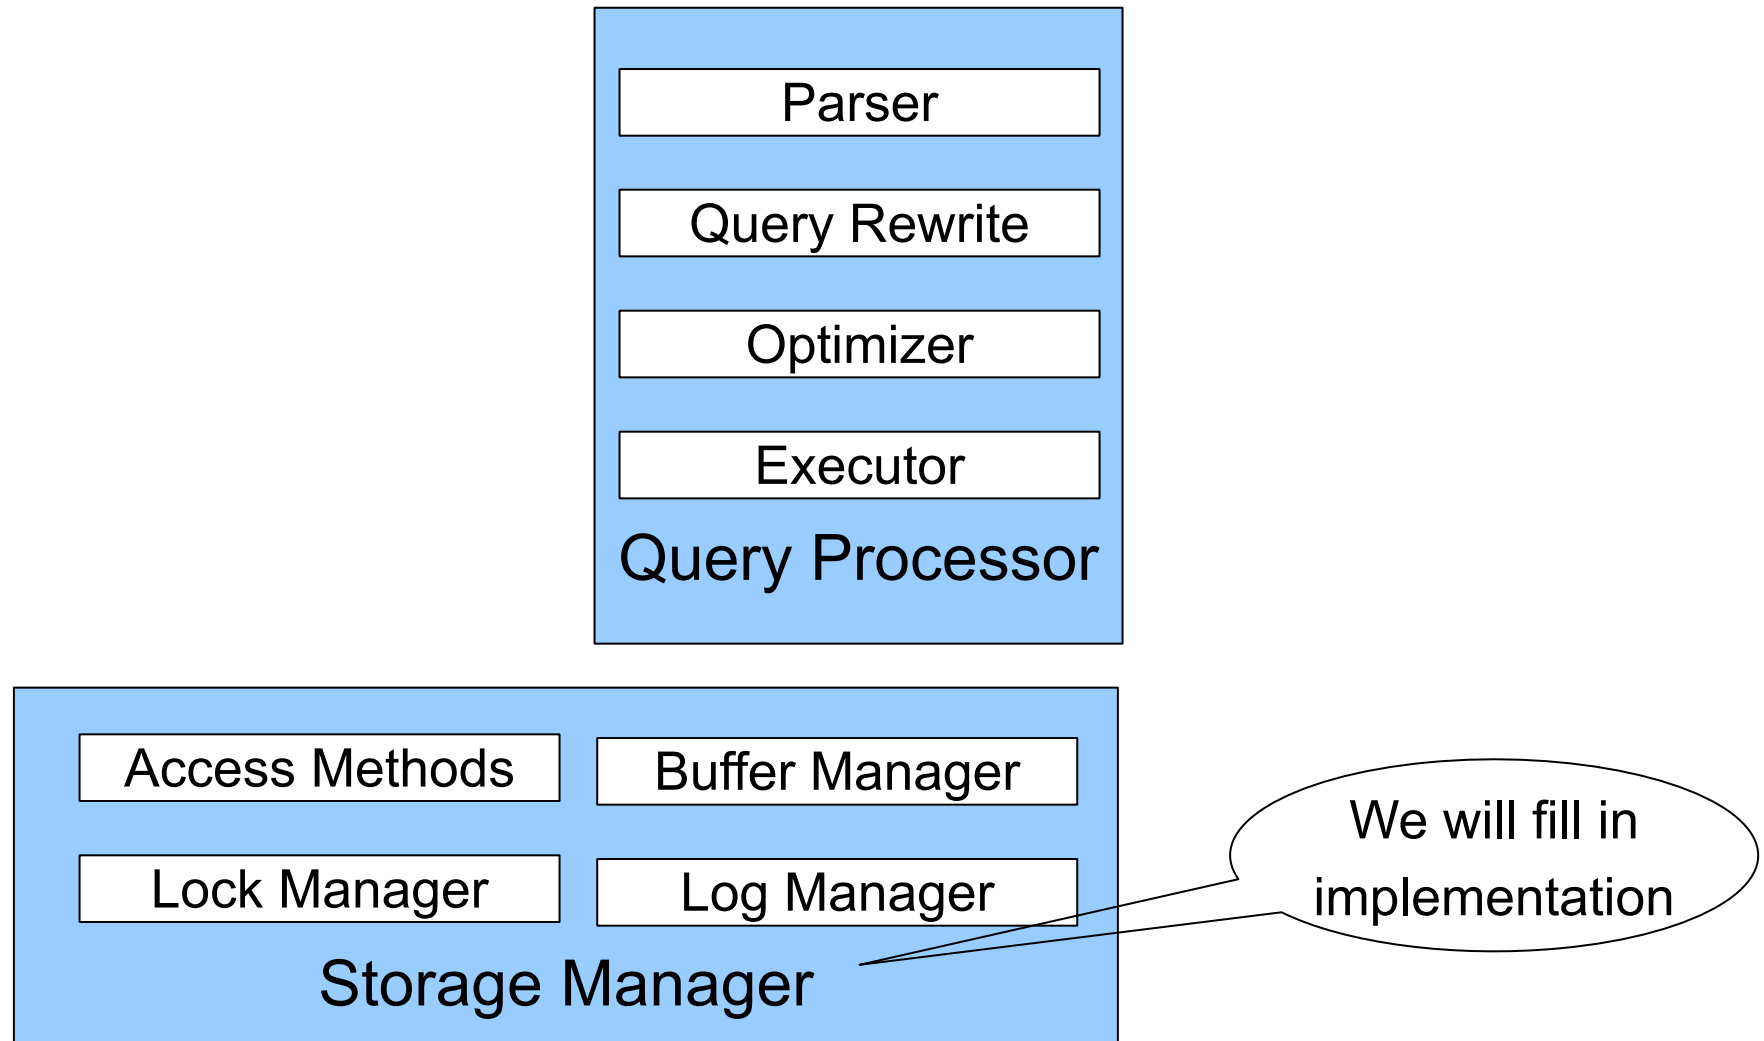

DBMS Architecture

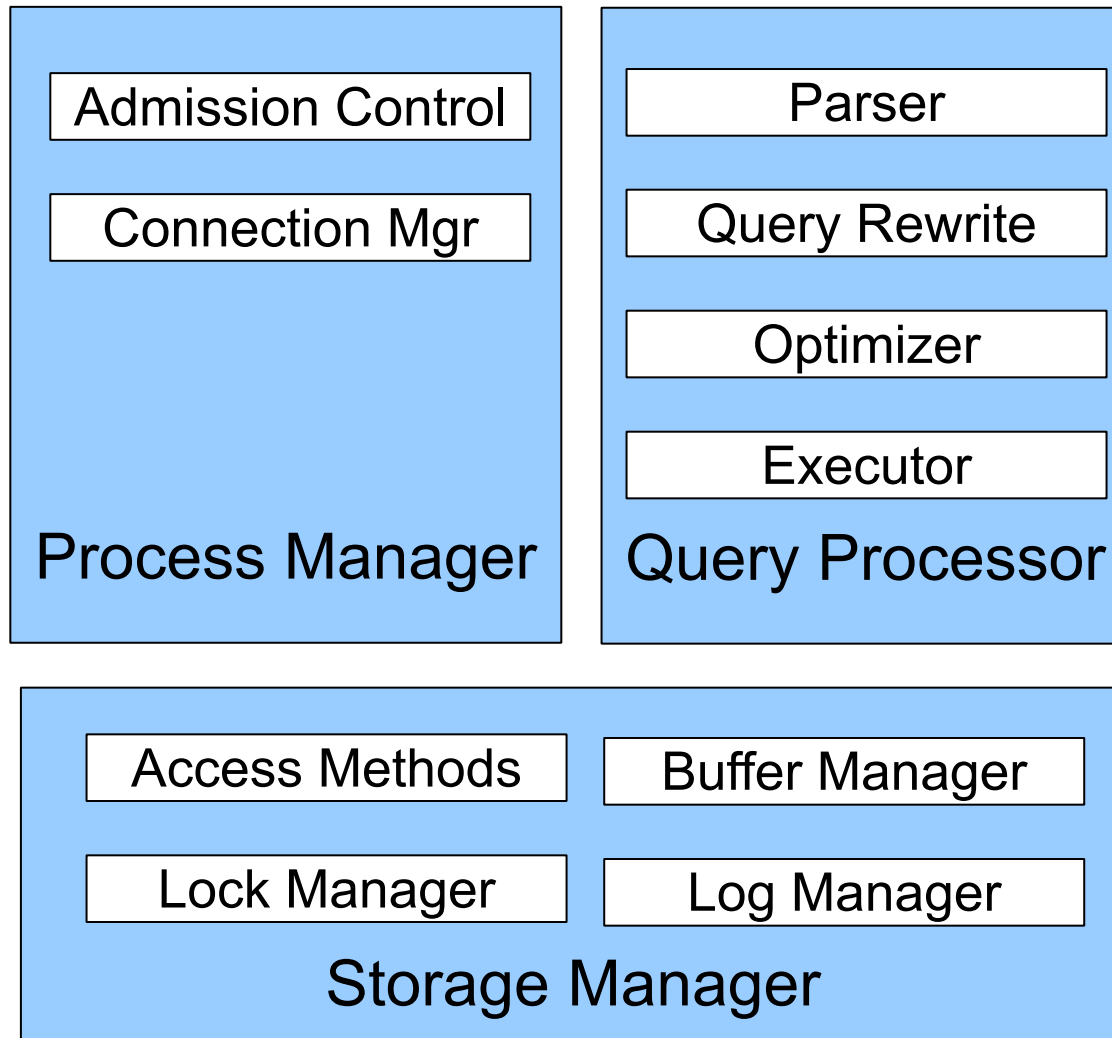

DBMS Architecture

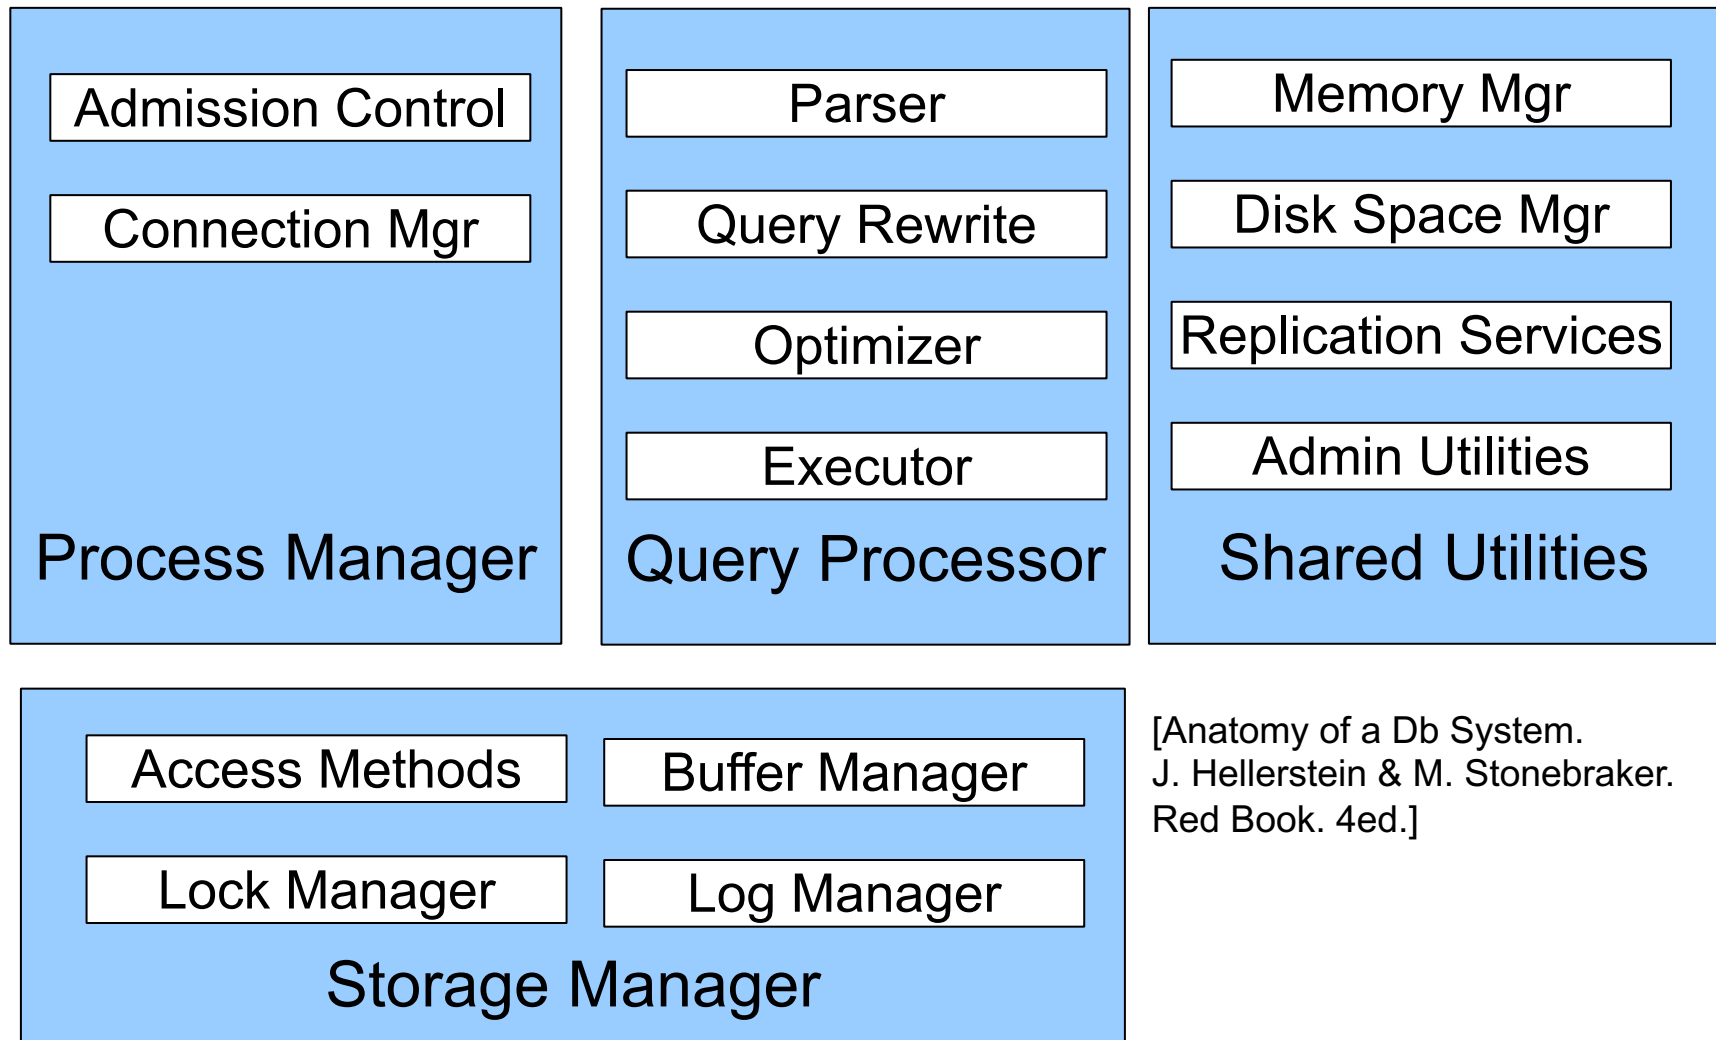

[Anatomy of a Db System.
J. Hellerstein & M. Stonebraker.
Red Book. 4ed.]

Goal for Today

Overview of query execution

Overview of storage manager

Query Processor

Example Database Schema

Supplier (sno, sname, scity, sstate)

Part (pno, pname, psize, pcolor)

Supplies (sno, pno, price)

View: Suppliers in Seattle

```
CREATE VIEW NearbySupp AS
```

```
SELECT sno, sname
```

```
FROM Supplier
```

```
WHERE scity='Seattle' AND sstate='WA'
```

Example Query

Supplier (sno, sname, scity, sstate)
Part (pno, pname, psize, pcolor)
Supplies (sno, pno, price)

- Find the names of all suppliers in Seattle who supply part number 2

```
SELECT sname
FROM NearbySupp
WHERE sno IN ( SELECT sno
                FROM Supplies
                WHERE pno = 2 )
```


Query Processor

- **Step 1: Parser**

- Parses query into an internal format
- Performs various checks using **catalog**

- **Step 2: Query rewrite**

- View rewriting, flattening, etc.

Rewritten Version of Our Query

Supplier (sno, sname, scity, sstate)
Part (pno, pname, psize, pcolor)
Supplies (sno, pno, price)

Original query:

```
SELECT sname
FROM NearbySupp
WHERE sno IN ( SELECT sno
                FROM Supplies
                WHERE pno = 2 )
```

Rewritten query (expanding NearbySupp view):

```
SELECT S.sname
FROM Supplier S, Supplies U
WHERE S.scity='Seattle' AND S.sstate='WA'
AND S.sno = U.sno
AND U.pno = 2;
```

Query Processor

▪ Step 3: Optimizer

- Find an efficient query plan for executing the query
- **A query plan is**
 - **Logical**: An extended relational algebra tree
 - **Physical**: With additional annotations at each node
 - Access method to use for each relation
 - Implementation to use for each relational operator


▪ Step 4: Executor

- Actually executes the physical plan

Logical Query Plan

```
SELECT S.sname
FROM Supplier S, Supplies U
WHERE
  S.scity='Seattle'
  AND S.sstate='WA'
  AND S.sno = U.sno
  AND U.pno = 2;
```

Supplier (sno, sname, scity, sstate)
Part (pno, pname, psize, pcolor)
Supplies (sno, pno, price)

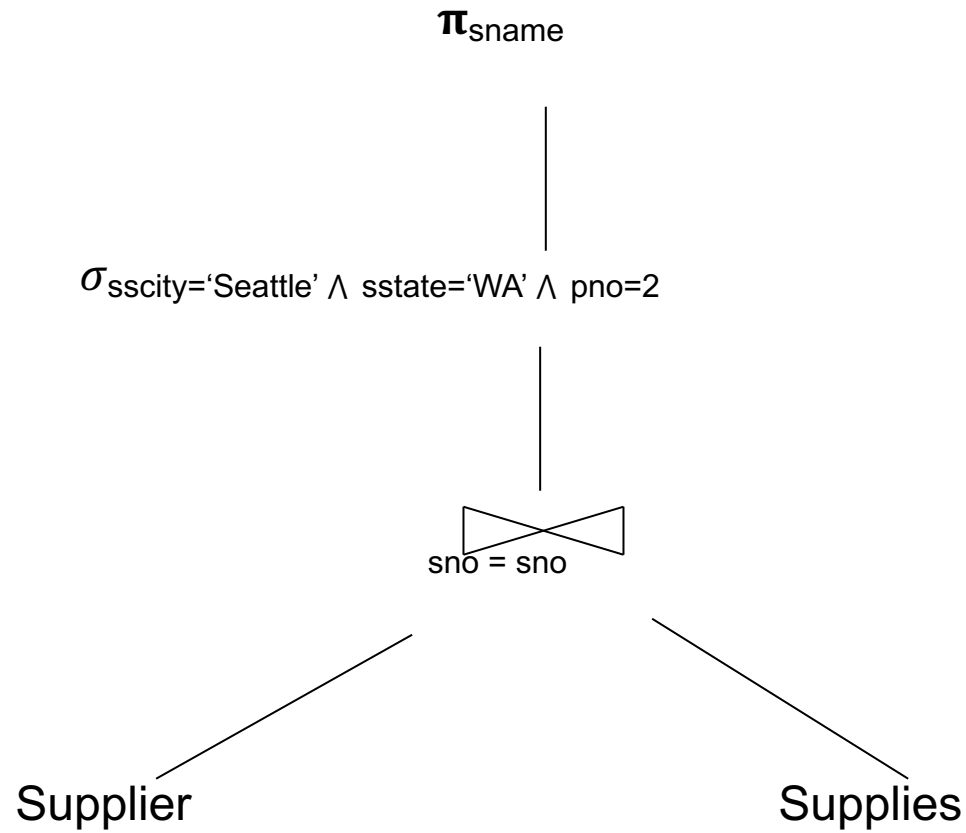

Physical Query Plan

- Logical query plan with extra annotations
- **Implementation choice** for each operator
- **Access path selection** for each relation
 - Bottom of tree = read from disk
 - Use a file scan or use an index

Physical Query Plan

Supplier (sno, sname, scity, sstate)
Part (pno, pname, psize, pcolor)
Supplies (sno, pno, price)

(On the fly)

π_{sname}

(On the fly)

$\sigma_{\text{sscity}='Seattle' \wedge \text{sstate}='WA' \wedge \text{pno}=2}$

(Nested loop)

sno = sno

Suppliers
(File scan)

Supplies
(File scan)


Query Executor

Iterator Interface

- Each **operator implements Oplerator.java**
- **open()**
 - Initializes operator state
 - Sets parameters such as selection predicate
- **next()**
 - **Returns a Tuple!**
 - Operator invokes next() recursively on its inputs
 - Performs processing and produces an output tuple
- **close()**: clean-up state
- Operators also have reference to their **child** operator in the query plan

Query Execution

Supplier (sno, sname, scity, sstate)
Part (pno, pname, psize, pcolor)
Supplies (sno, pno, price)

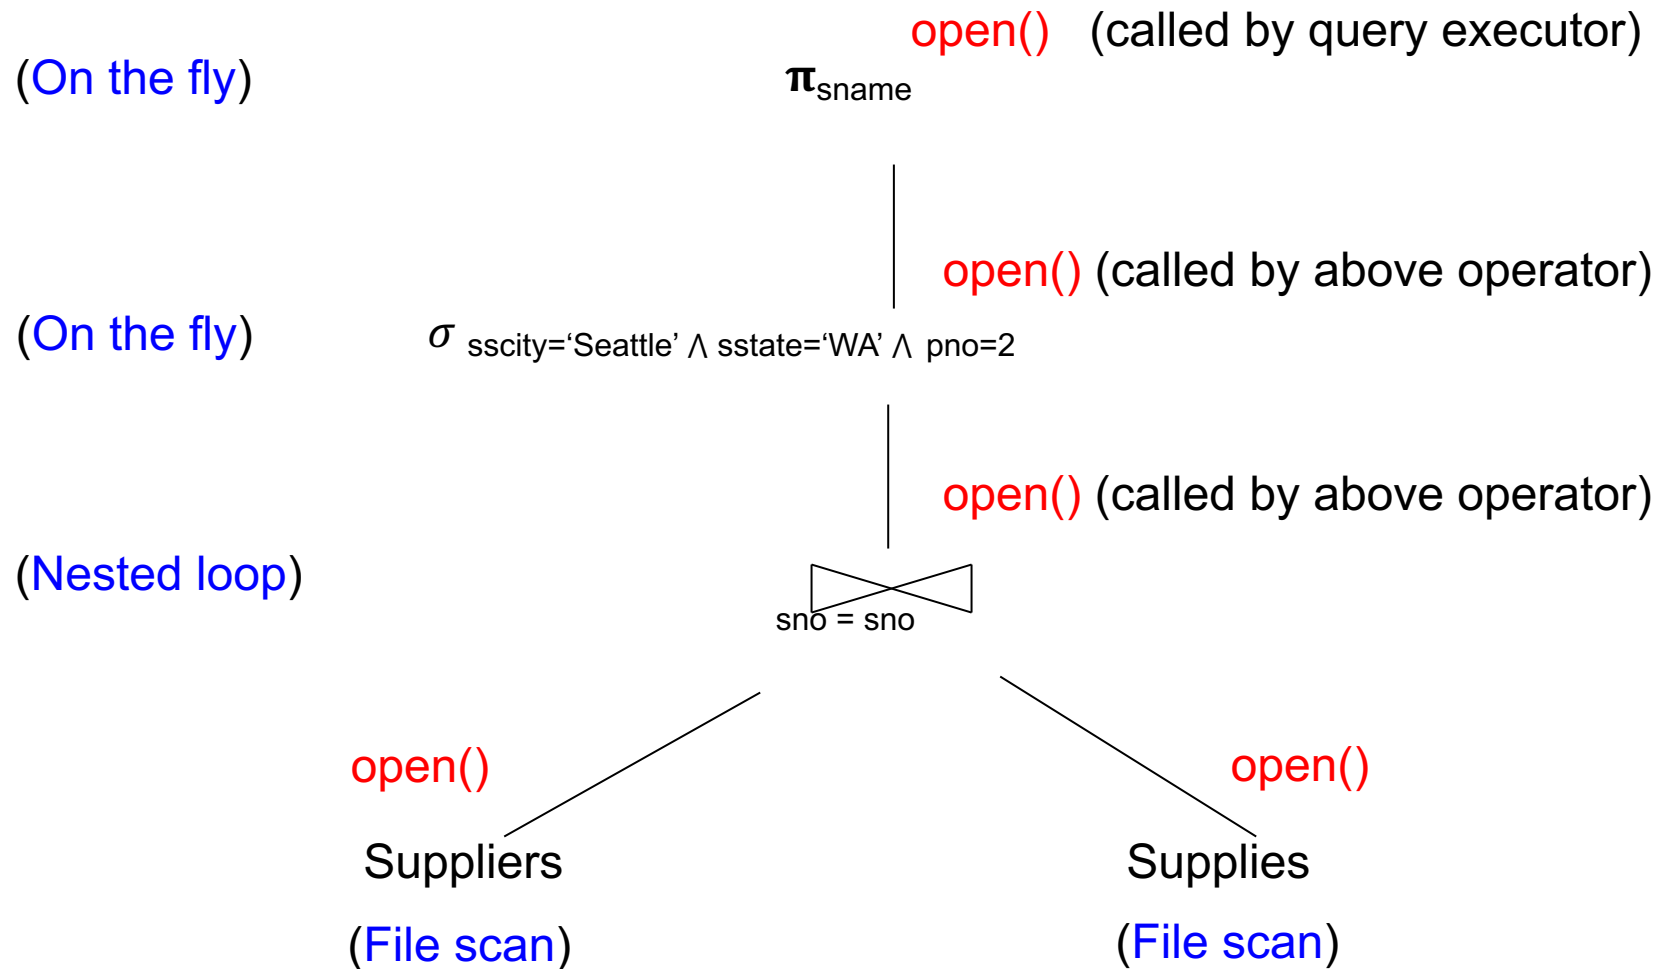


Query Execution

Supplier (sno, sname, scity, sstate)
Part (pno, pname, psize, pcolor)
Supplies (sno, pno, price)


(On the fly)



(On the fly)





(Nested loop)

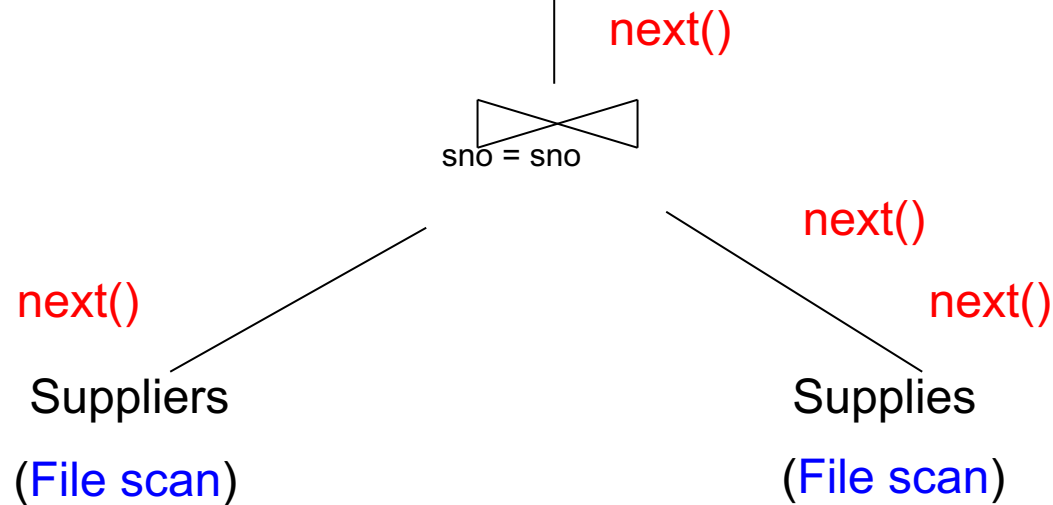


Storage Manager

Access Methods

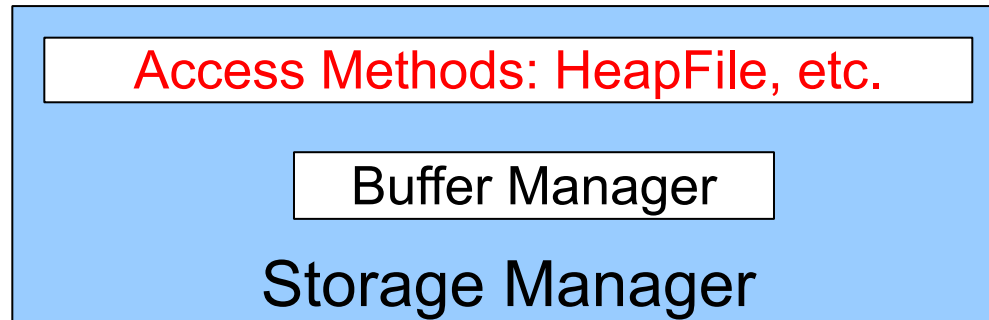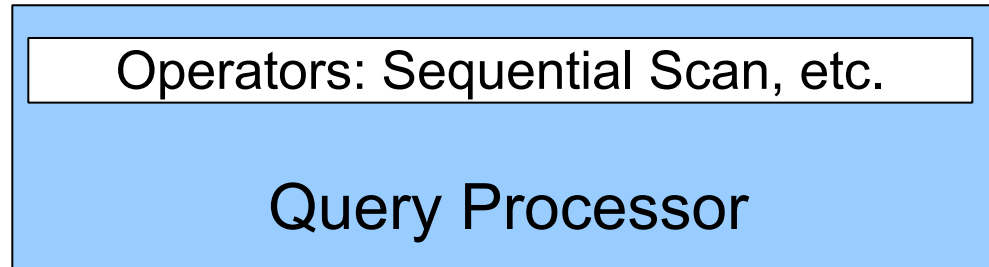

- **Operators:** Process data
- **Access methods:** Organize data to support fast access to desired subsets of records
- **Buffer manager:** Caches data in memory. Reads/writes data to/from disk as needed
- **Disk-space manager:** Allocates space on disk for files/access methods

Buffer Manager (BufferPool in SimpleDB)

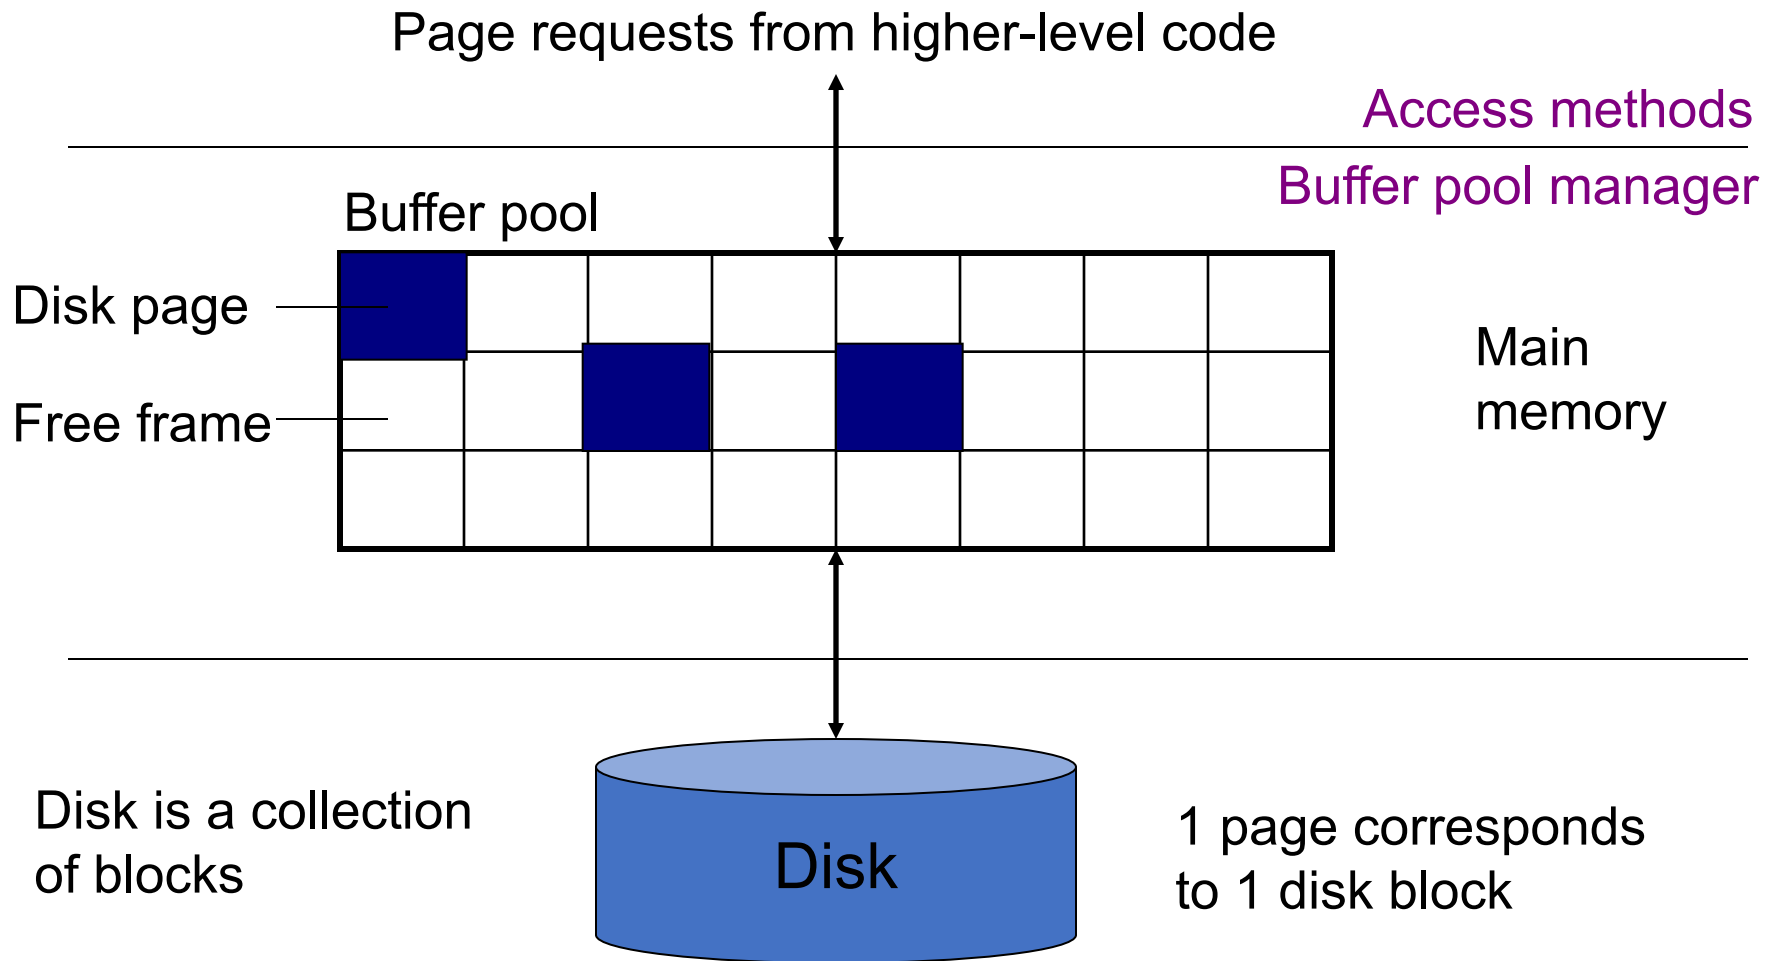


Buffer Manager

- Brings pages in from memory and caches them
- Eviction policies
 - Random page (ok for SimpleDB)
 - Least-recently used
 - The “clock” algorithm (see book)
- Keeps track of which **pages are dirty**
 - A dirty page has changes not reflected on disk
 - Implementation: Each page includes a dirty bit


Access Methods

- A DBMS stores data on disk by breaking it into *pages*
 - A page is the size of a disk block.
 - A page is the unit of disk IO
- Buffer manager caches these pages in memory
- Access methods do the following:
 - They organize pages into collections called *DB files*
 - They organize data inside pages
 - They provide an API for operators to access data in these files
- Discussion:
 - OS vs DBMS files
 - OS vs DBMS buffer manager


Query Execution

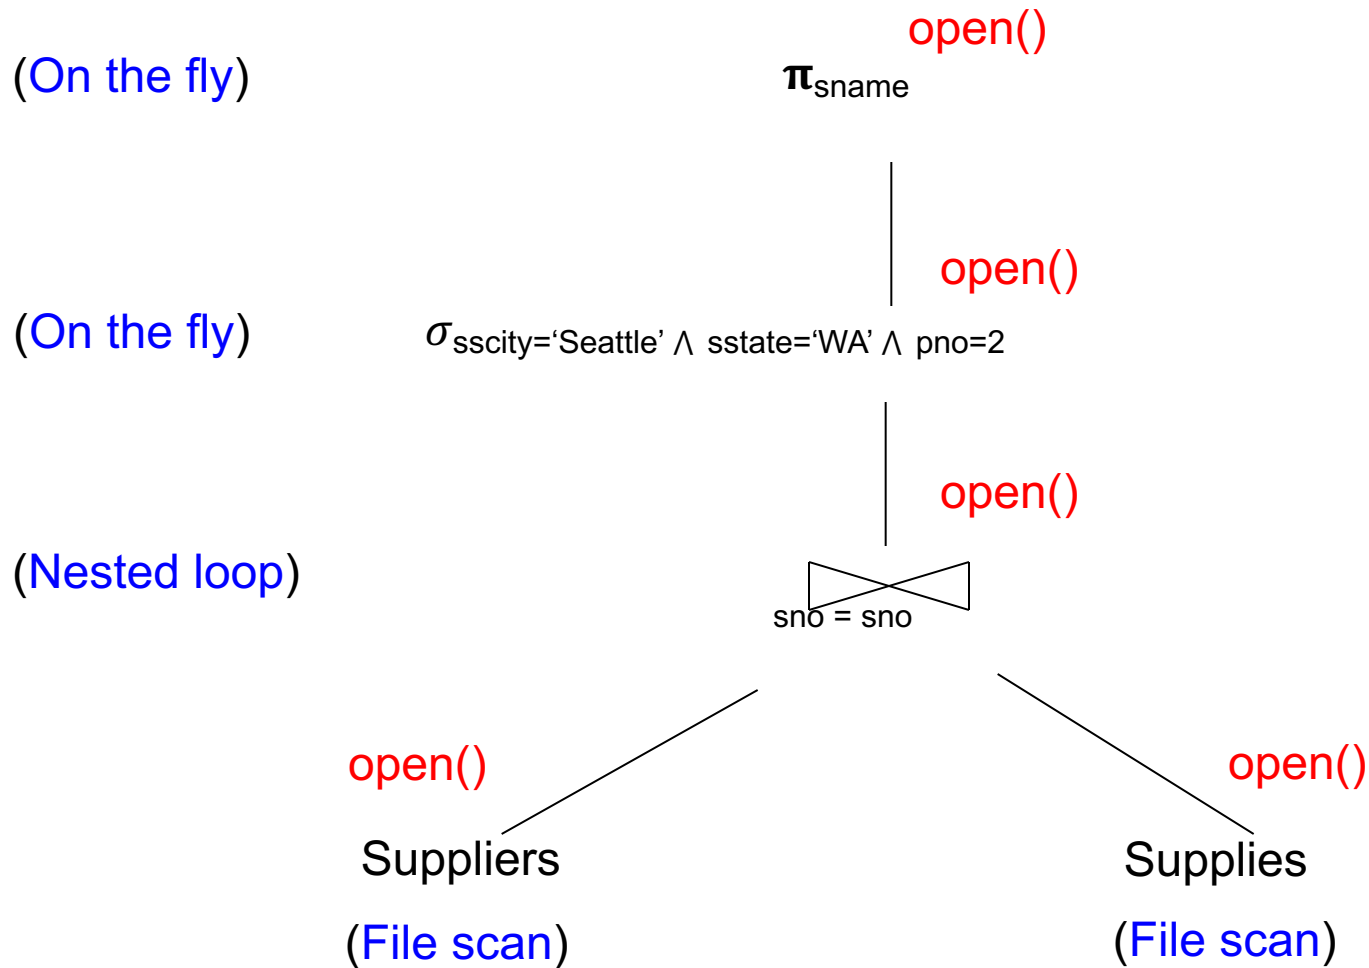


Query Execution

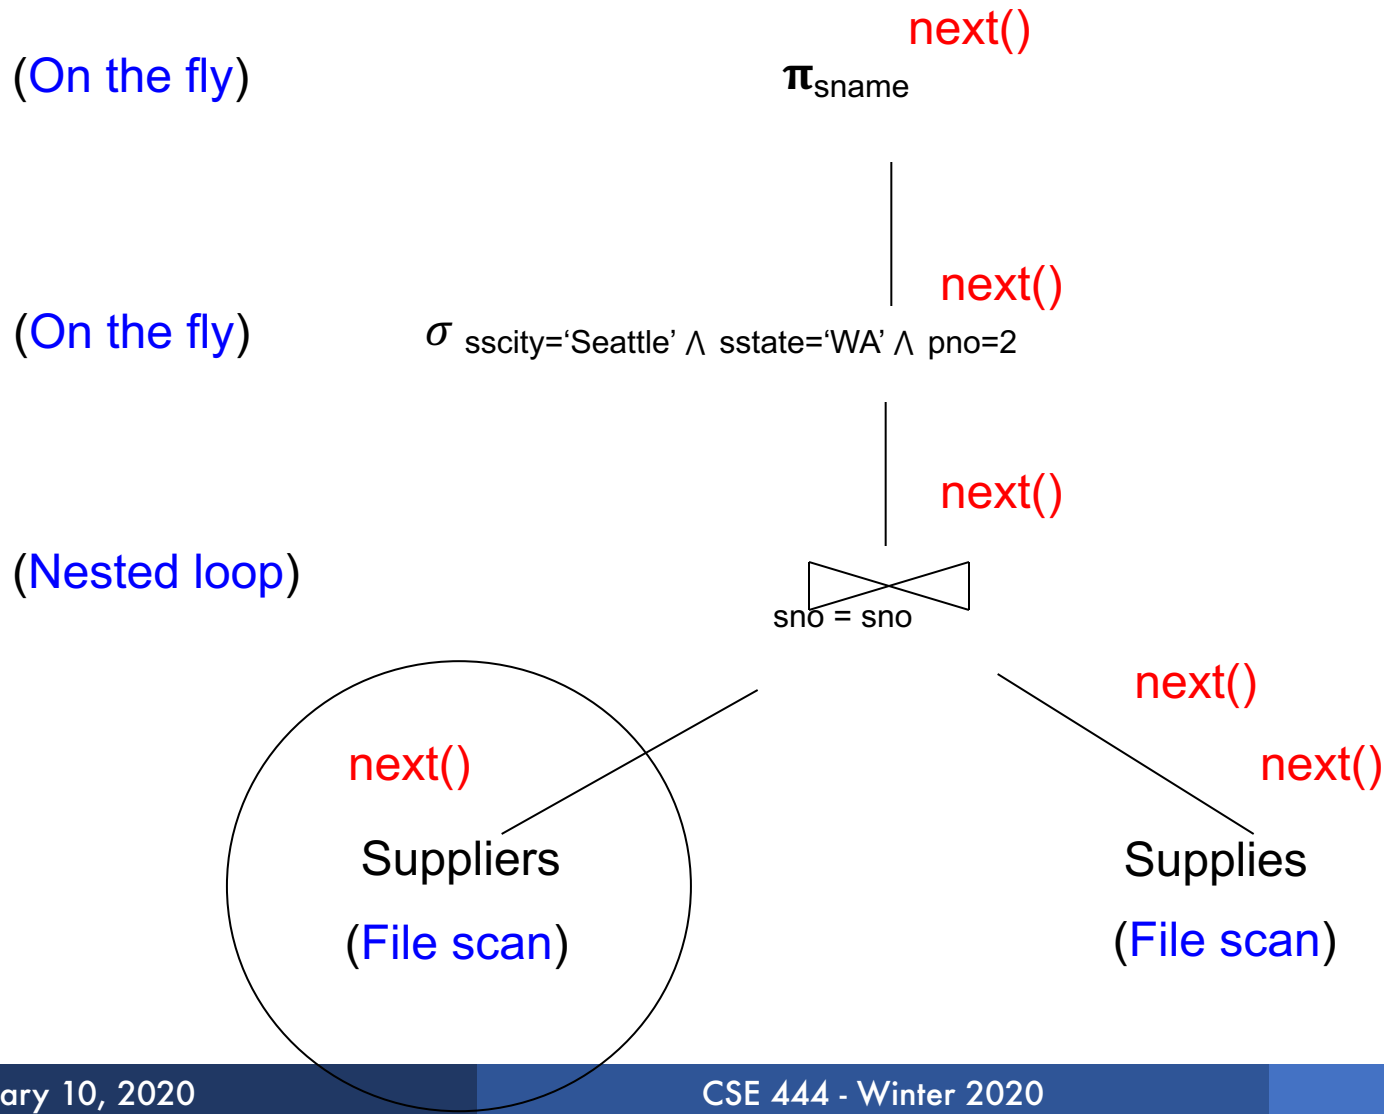

Query Execution In SimpleDB

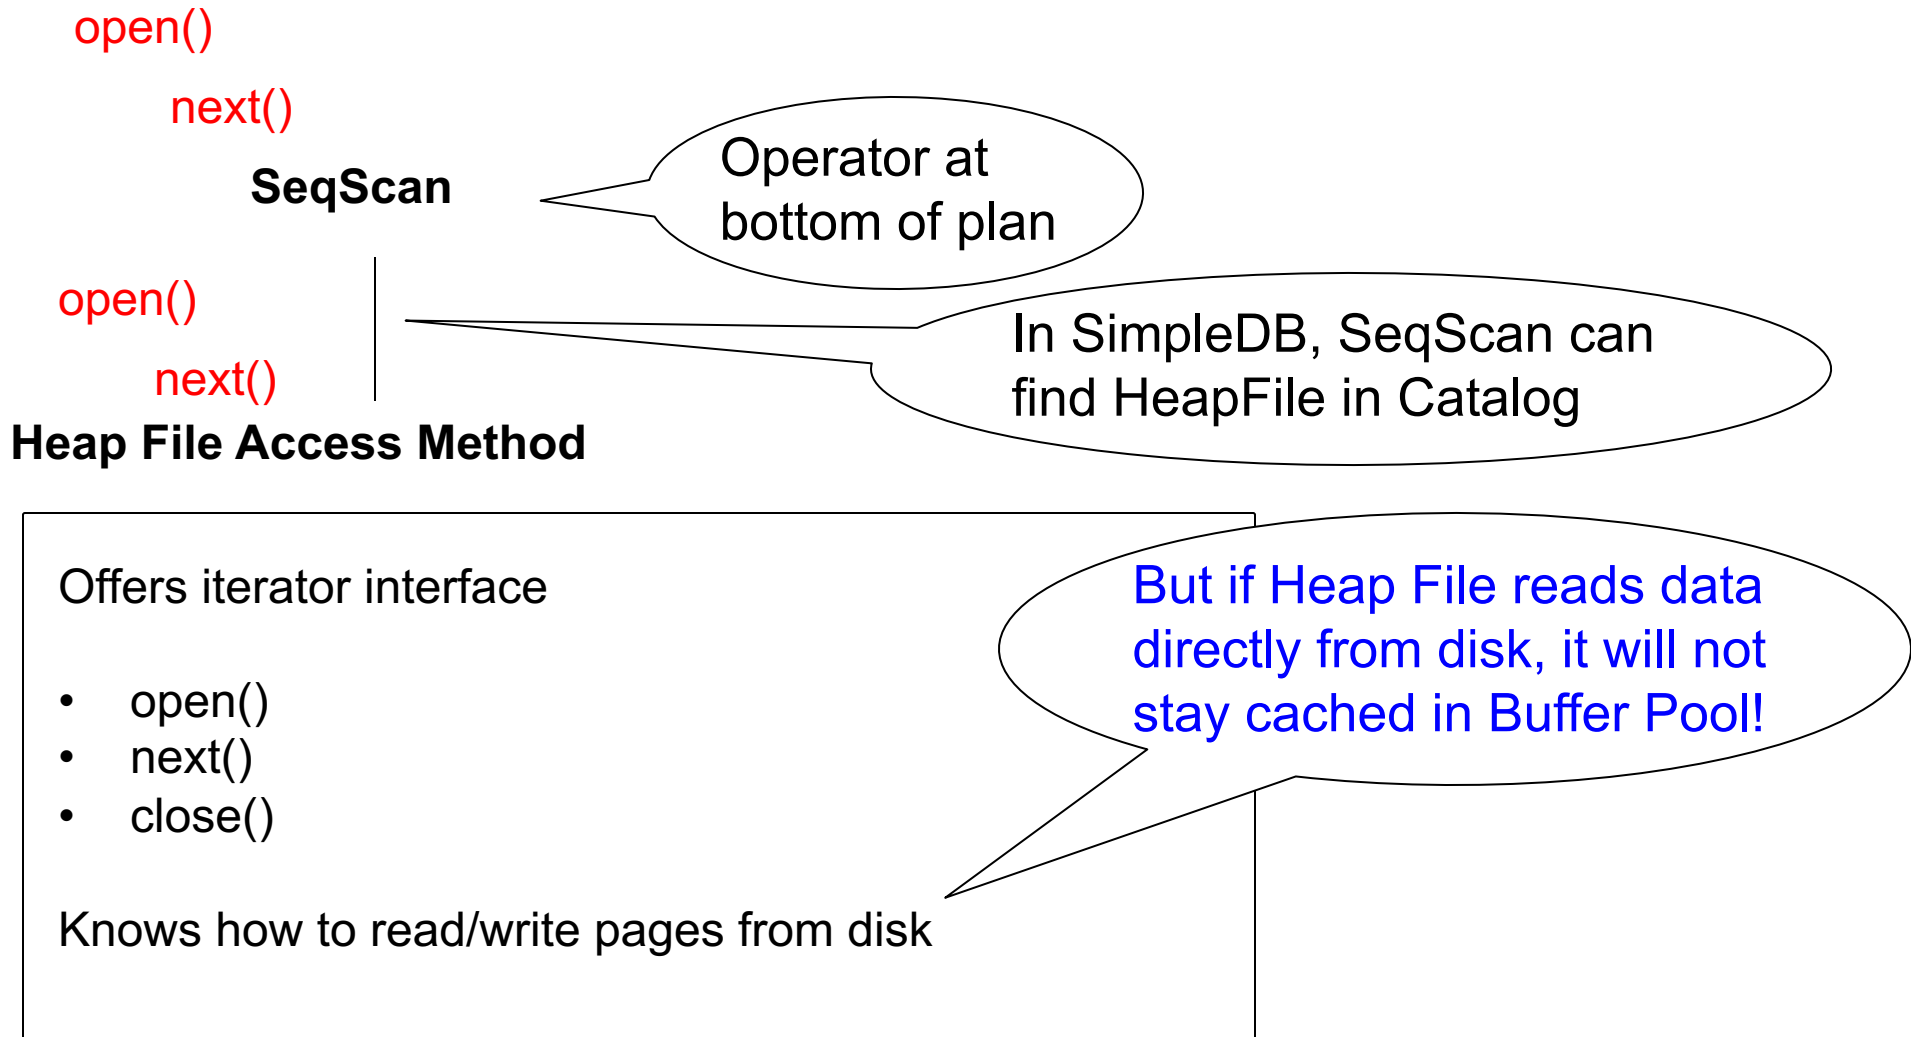

Query Execution In SimpleDB

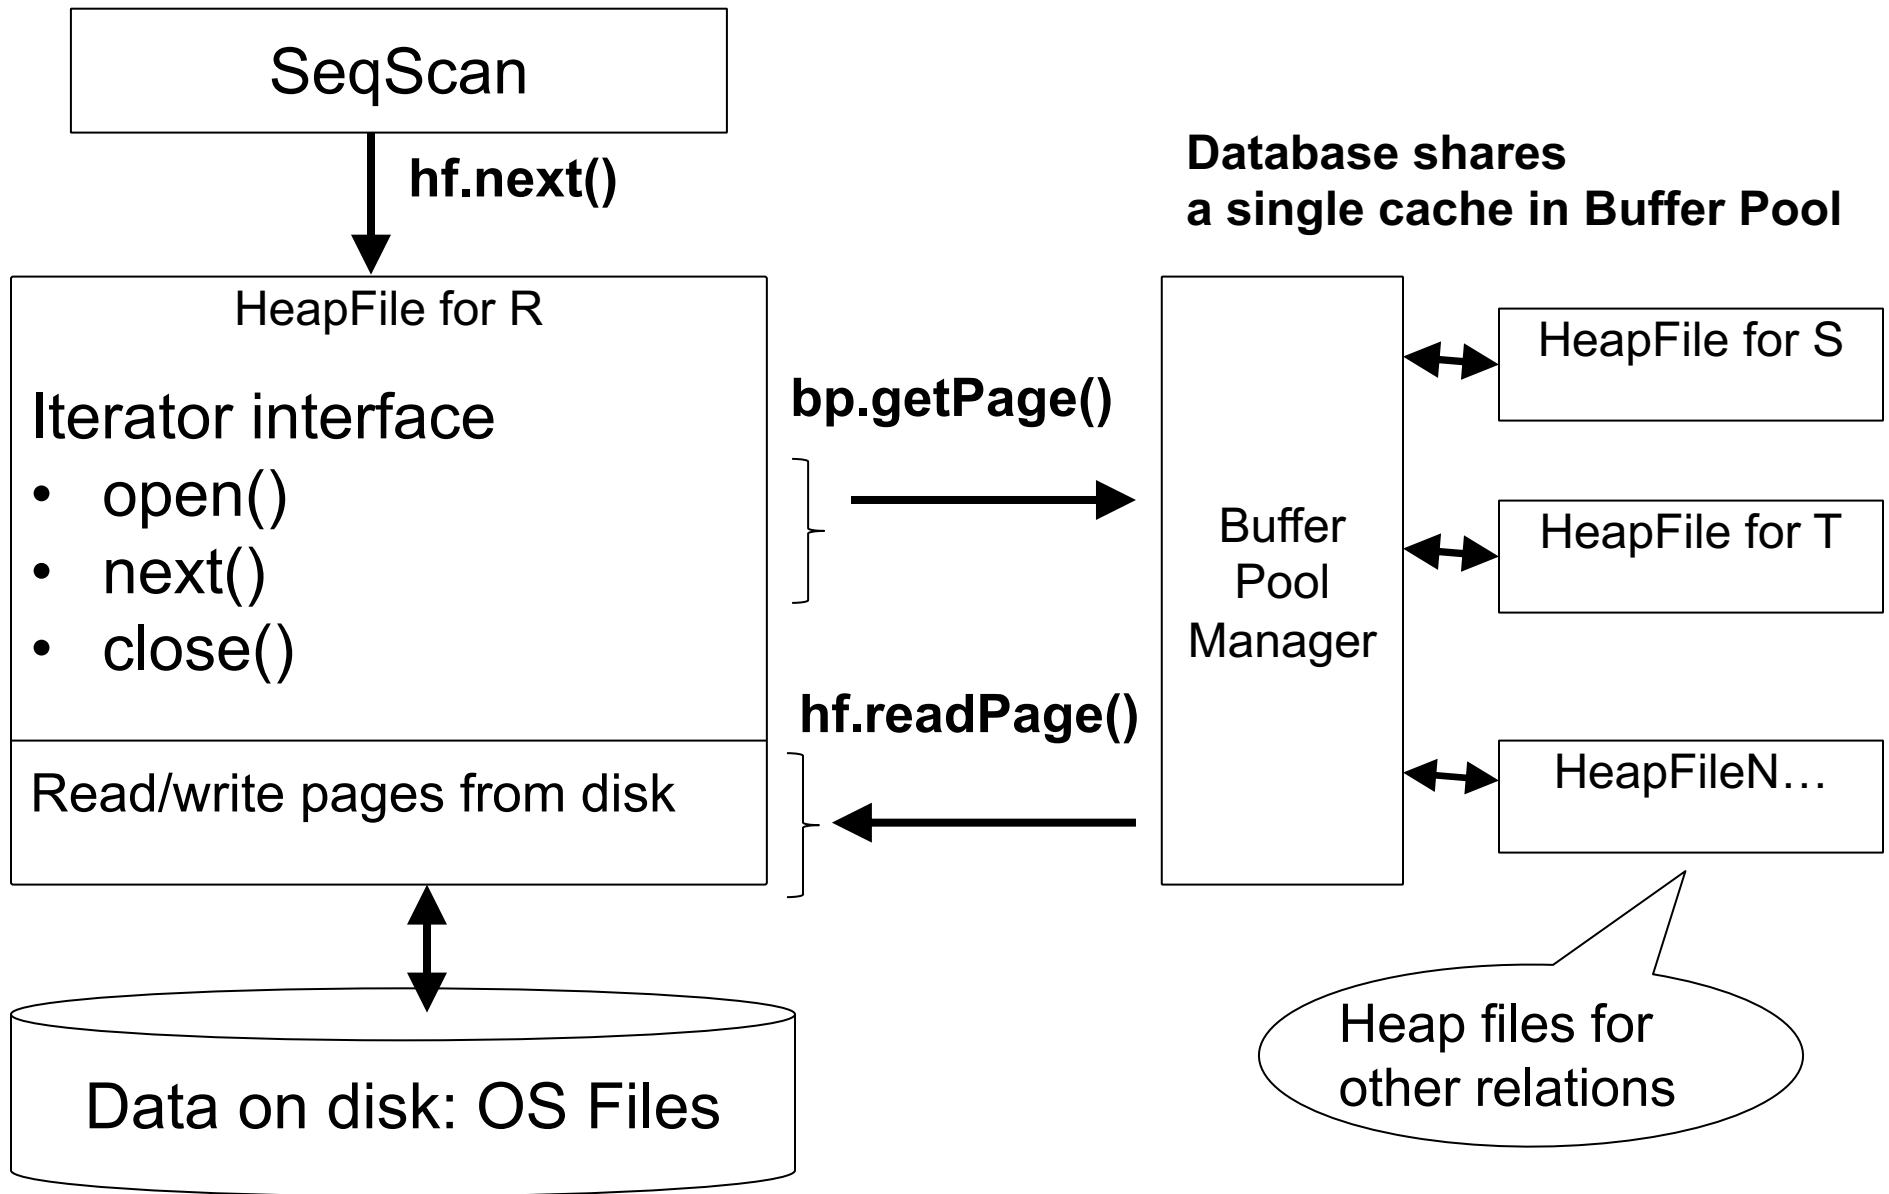

HeapFile In SimpleDB

- Data is stored on disk in an OS file. HeapFile class knows how to “decode” its content
- Control flow:

SeqScan calls methods such as “iterate” on the HeapFile
Access Method

During the iteration, the HeapFile object needs to call the
BufferManager.getPage() method to ensure that necessary
pages get loaded into memory.

The BufferManager will then call HeapFile
.readPage()/writePage() page to actually read/write
the page.