

Multi-layer Neural Network - Binary Classification in $\{0,1\}$

L -th layer plays the role of features, but trained instead of pre-determined


This is a 5-dimensional vector

$$a^{(1)} = x$$

$a^{(2)} = g(\Theta^{(1)} a^{(1)})$

Scalar function g is applied coordinate-wise

$$\vdots$$
$$a^{(l+1)} = g(\Theta^{(l)} a^{(l)})$$
$$\vdots$$
$$\hat{y} = g(\Theta^{(L)} a^{(L)})$$

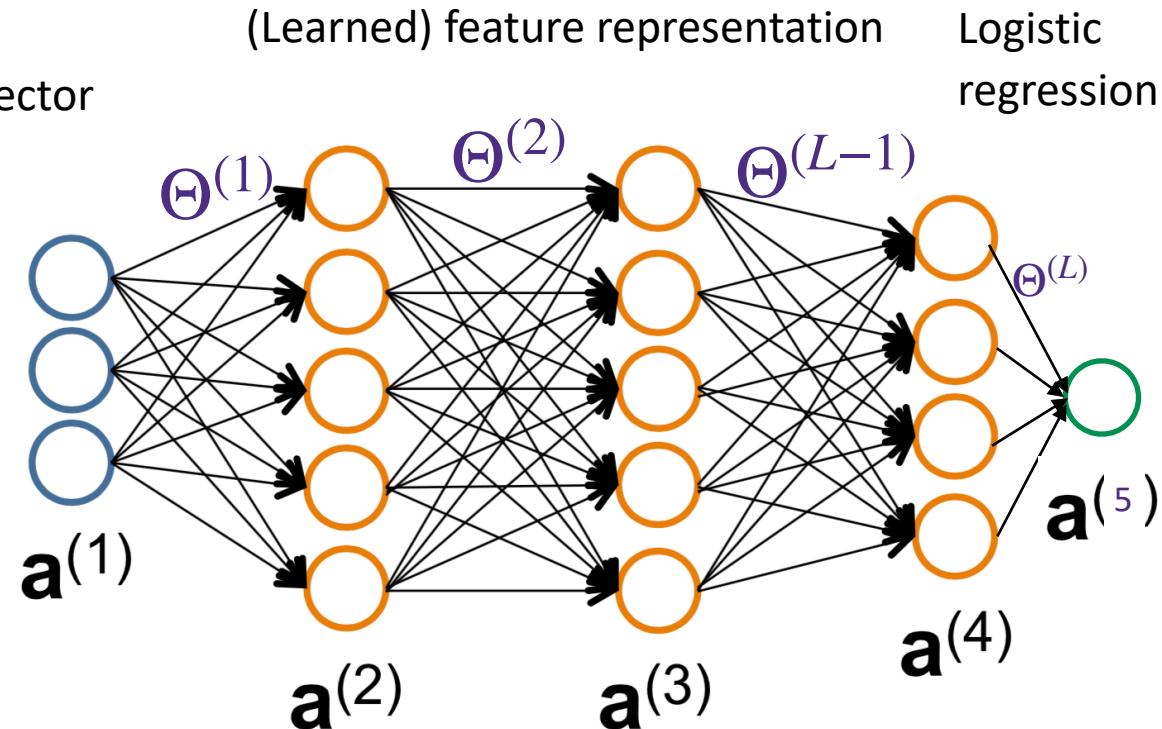

Cross entropy loss:

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Binary Logistic Regression
with learned feature $a^{(4)}$

Multi-layer Neural Network - Binary Classification

$$a^{(1)} = x$$

$$a^{(2)} = \sigma(\Theta^{(1)} a^{(1)})$$

ReLU

⋮


$$a^{(l+1)} = \sigma(\Theta^{(l)} a^{(l)})$$

⋮


$$\hat{y} = g(\Theta^{(L)} a^{(L)})$$

Sigmoid

Sigmoid

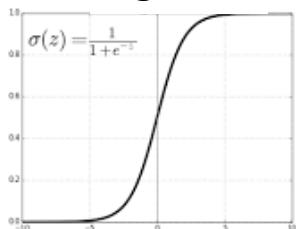


ReLU

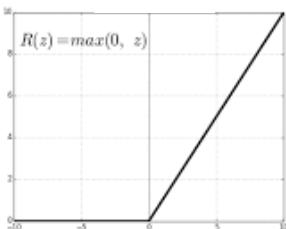

- Why is ReLU better than sigmoid?

(Learned) feature representation

Logistic regression

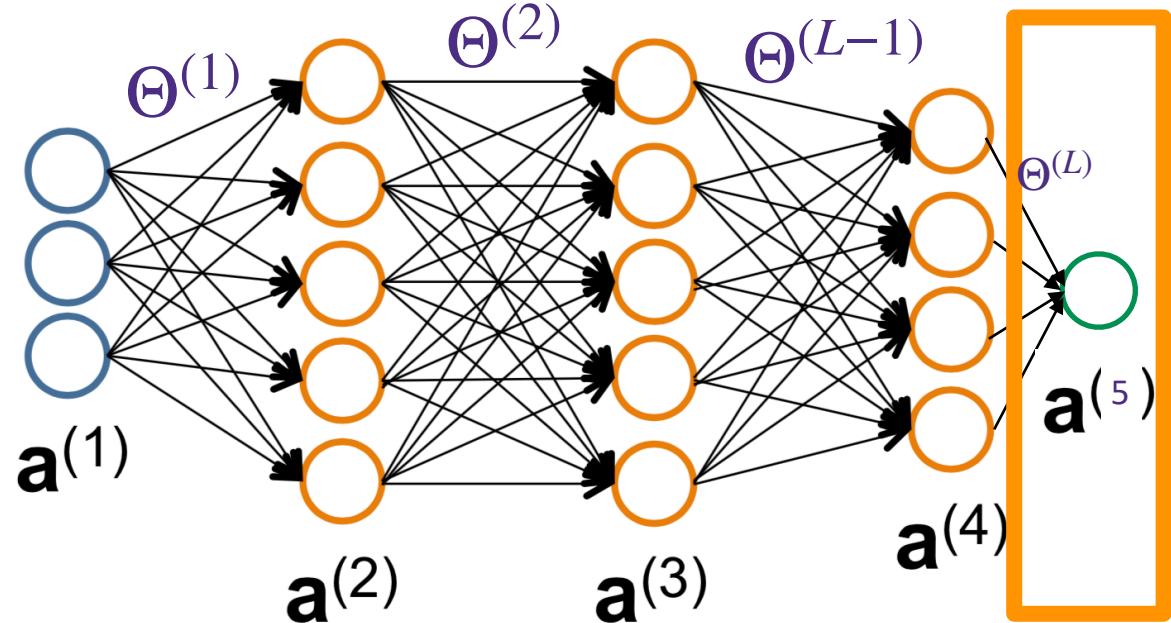

Cross entropy loss:

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$\sigma(z) = \max\{0, z\} \quad g(z) = \frac{1}{1 + e^{-z}}$$


Binary Logistic Regression

Nonlinear activation function

- popular choices of activation function includes


Sigmoid

$$\sigma(x) = \frac{1}{1+e^{-x}}$$

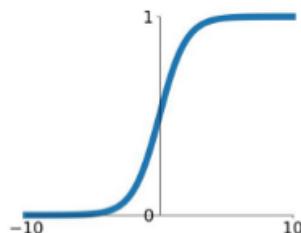


tanh

$$\tanh(x) = \frac{e^x - e^{-x}}{e^x + e^{-x}}$$

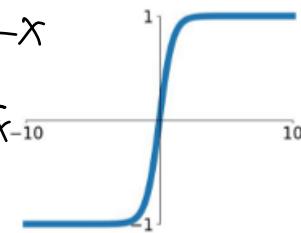


ReLU

$$\max(0, x)$$

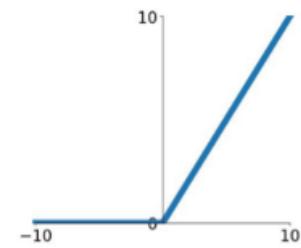


Leaky ReLU
 $\max(0.1x, x)$

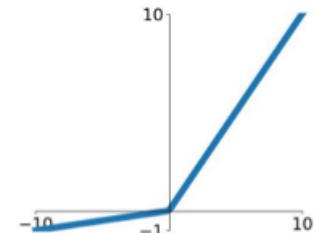

ELU

$$\begin{cases} x & x \geq 0 \\ \alpha(e^x - 1) & x < 0 \end{cases}$$

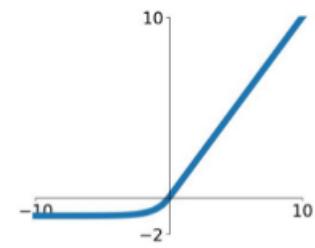

- Why is ReLU better than Sigmoid?
- Why is ELU better than ReLU?

K-class Classification: multiple output units



Pedestrian




Car



Motorcycle



Truck

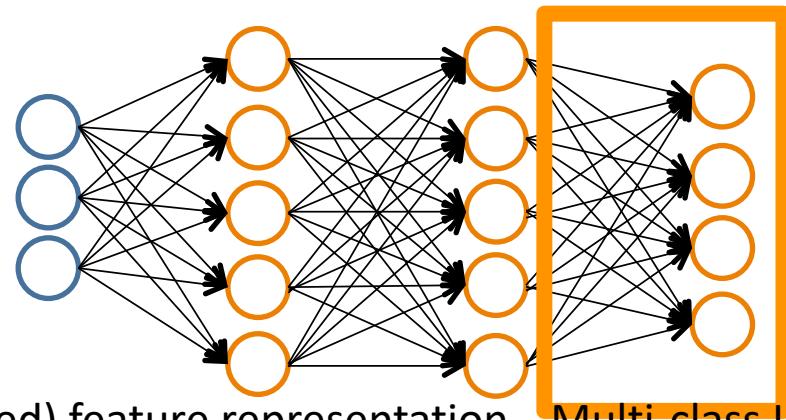

$$h_{\Theta}(\mathbf{x}) \in \mathbb{R}^K$$

Multi-class
Logistic
Regression

We want:

$$h_{\Theta}(\mathbf{x}) \approx \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

when pedestrian

$$h_{\Theta}(\mathbf{x}) \approx \begin{bmatrix} 0 \\ 1 \\ 0 \\ 0 \end{bmatrix}$$

when car

$$h_{\Theta}(\mathbf{x}) \approx \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix}$$

when motorcycle

$$h_{\Theta}(\mathbf{x}) \approx \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix}$$

when truck

Multi-layer Neural Network - Regression

$$a^{(1)} = x$$

$$a^{(2)} = \sigma(\Theta^{(1)} a^{(1)})$$

:

$$a^{(l+1)} = \sigma(\Theta^{(l)} a^{(l)})$$


:

$$\hat{y} = \Theta^{(L)} a^{(L)}$$

Linear model

(Learned) feature representation

Logistic regression

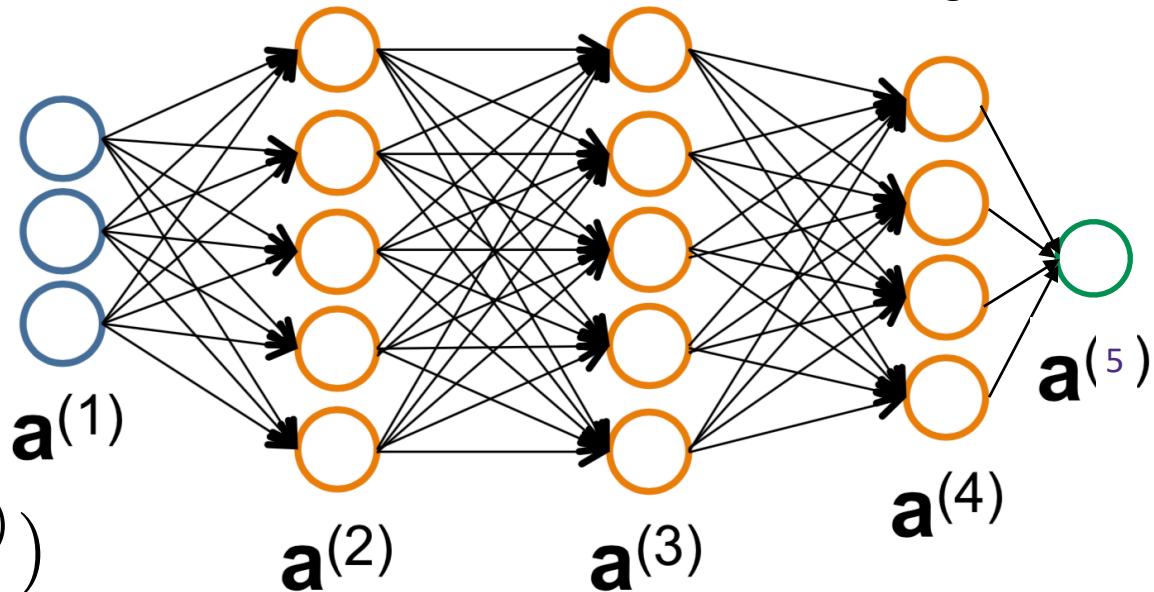

Square loss:

$$\mathcal{L}(y, \hat{y}) = (y - \hat{y})^2$$

$$\sigma(z) = \max\{0, z\}$$

Training Neural Networks

$$a^{(1)} = x$$

$$\underline{z^{(2)} = \Theta^{(1)} a^{(1)}}$$

$$a^{(2)} = g(z^{(2)})$$


:

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:

$$\hat{y} = g(\Theta^{(L)} a^{(L)})$$

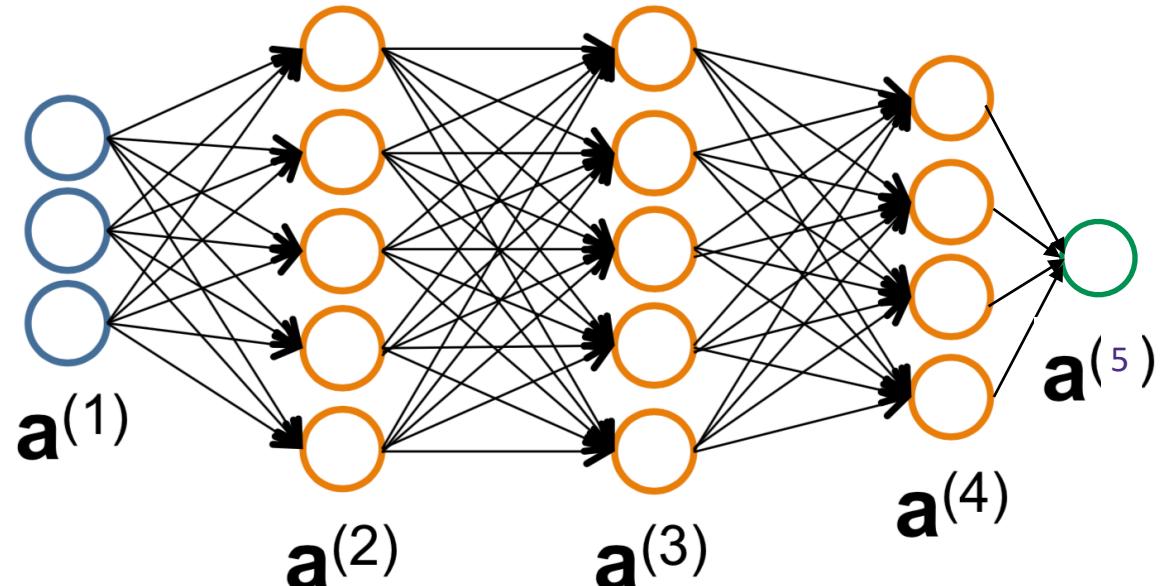

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient Descent:

$$\Theta^{(l)} \leftarrow \Theta^{(l)} - \eta \nabla_{\Theta^{(l)}} \mathcal{L}(y, \hat{y}) \quad \forall l$$

Gradient Descent: $\Theta^{(l)} \leftarrow \Theta^{(l)} - \eta \nabla_{\Theta^{(l)}} \mathcal{L}(y, \hat{y}) \quad \forall l$

Seems simple enough - what do packages like PyTorch, Tensorflow, Jax, Theano, Caffe, MxNet provide?

1. Automatic differentiation
 1. Given a NN, compute the gradient automatically
 2. Compute the gradient efficiently
2. Convenient libraries
 1. Set-up NN
 2. Choose algorithms (SGD, Adam, etc.) for training
 3. Hyper-parameter tuning
3. GPU support
 1. Linear algebraic operations

Gradient Descent:

$$\Theta^{(l)} \leftarrow \Theta^{(l)} - \eta \nabla_{\Theta^{(l)}} L(y, \hat{y}) \quad \forall l$$

Seems simple enough, why are packages like PyTorch, Tensorflow, Theano, Cafe, MxNet synonymous with deep learning?

1. Automatic differentiation

2. Convenient libraries

Gradient Descent:

Seems simple enough,
Theano, Cafe, MxNet

1. Automatic differ-

2. Convenient libra-

```
class Net(nn.Module):

    def __init__(self):
        super(Net, self).__init__()
        # 1 input image channel, 6 output channels, 3x3 square convolution
        # kernel
        self.conv1 = nn.Conv2d(1, 6, 3)
        self.conv2 = nn.Conv2d(6, 16, 3)
        # an affine operation: y = Wx + b
        self.fc1 = nn.Linear(16 * 6 * 6, 120)  # 6*6 from image dimension
        self.fc2 = nn.Linear(120, 84)
        self.fc3 = nn.Linear(84, 10)

    def forward(self, x):
        # Max pooling over a (2, 2) window
        x = F.max_pool2d(F.relu(self.conv1(x)), (2, 2))
        # If the size is a square you can only specify a single number
        x = F.max_pool2d(F.relu(self.conv2(x)), 2)
        x = x.view(-1, self.num_flat_features(x))
        x = F.relu(self.fc1(x))
        x = F.relu(self.fc2(x))
        x = self.fc3(x)
        return x
```

Gradient Descent:

Seems simple enough,
Theano, Cafe, MxNet

1. Automatic differentiation

2. Convenient libraries

```
class Net(nn.Module):

    def __init__(self):
        super(Net, self).__init__()
        # 1 input image channel, 6 output channels, 3x3 square convolution
        # kernel
        self.conv1 = nn.Conv2d(1, 6, 3)
        self.conv2 = nn.Conv2d(6, 16, 3)
        # an affine operation: y = Wx + b
        self.fc1 = nn.Linear(16 * 6 * 6, 120)  # 6*6 from image dimension
        self.fc2 = nn.Linear(120, 84)
        self.fc3 = nn.Linear(84, 10)

    def forward(self, x):
        # Max pooling over a (2, 2) window
        x = F.max_pool2d(F.relu(self.conv1(x)), (2, 2))
        # If the size is a square you can only specify a single number
        x = F.max_pool2d(F.relu(self.conv2(x)), 2)
        x = x.view(-1, self.num_flat_features(x))
        x = F.relu(self.fc1(x))
        x = F.relu(self.fc2(x))
        x = self.fc3(x)
        return x
```

```
# create your optimizer
optimizer = optim.SGD(net.parameters(), lr=0.01)

# in your training loop:
optimizer.zero_grad()    # zero the gradient buffers
output = net(input)
loss = criterion(output, target)
loss.backward()
optimizer.step()      # Does the update
```

Common training issues

Neural networks are **non-convex**

- For large networks, **gradients** can **blow up** or **go to zero**. This can be helped by **batchnorm** or **ResNet** architecture
- **Stepsize** and **batchsize** have large impact on optimizing the training error *and* generalization performance
- Fancier alternatives to SGD (Adagrad, Adam, LAMB, etc.) can significantly improve training
- Overfitting is common and not undesirable: typical to achieve 100% training accuracy even if test accuracy is just 80%
- Making the network *bigger* may make training *faster!*
- Start from a code that someone else has tried and tested

Common training issues

Training is too slow:

- Use larger step sizes, develop step size reduction schedule
- Use GPU resources
- Change batch size
- Use momentum and more advanced optimizers (e.g., Adam)
- Apply batch normalization
- Make network larger or smaller (# layers, # filters per layer, etc.)

Test accuracy is low

- Try modifying all of the above, plus changing other hyperparameters

Back Propagation

W

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮


$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

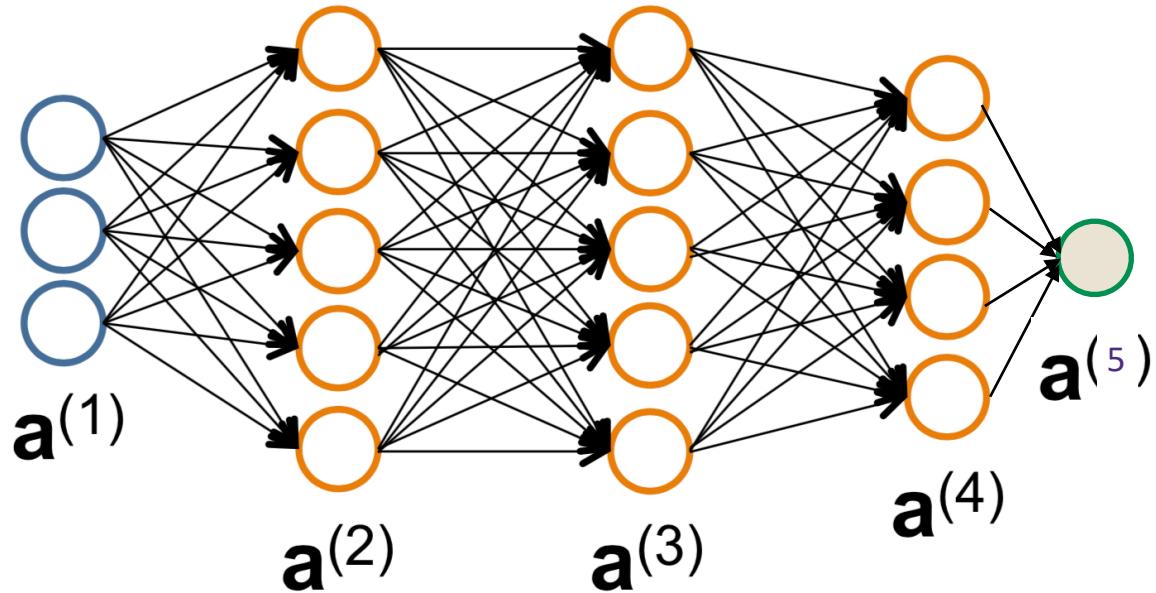

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

What do we need to run gradient descent?

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮


$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

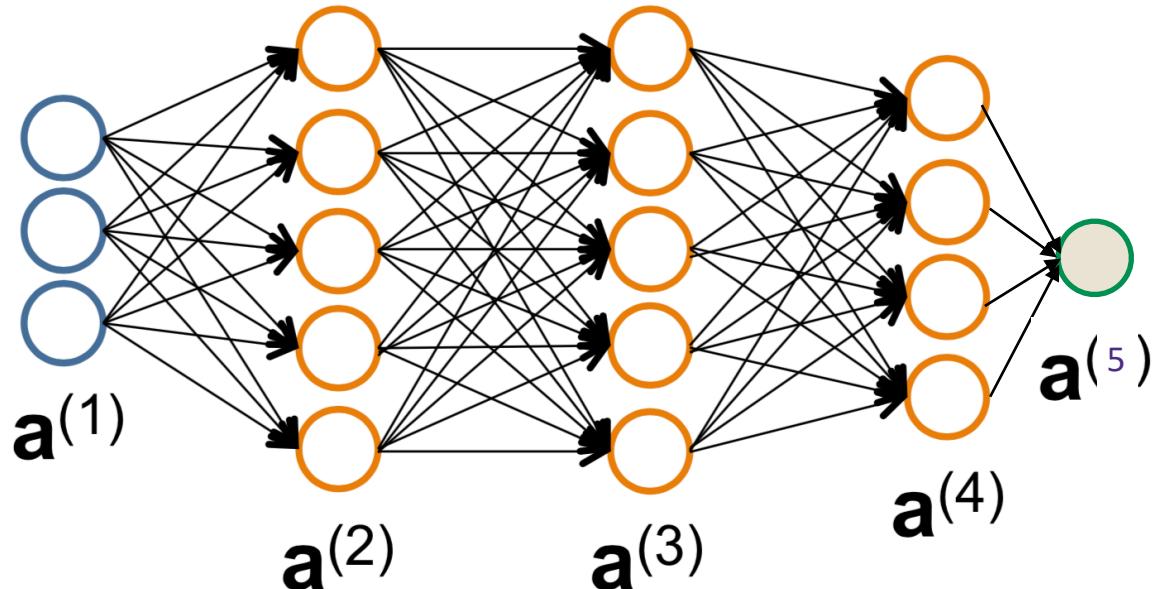

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$


$$a^{(l+1)} = g(z^{(l+1)})$$

:

$$\hat{y} = a^{(L+1)}$$

What do we need to run gradient descent?

$$\nabla_{\Theta} \mathcal{L}(y, \hat{y})$$

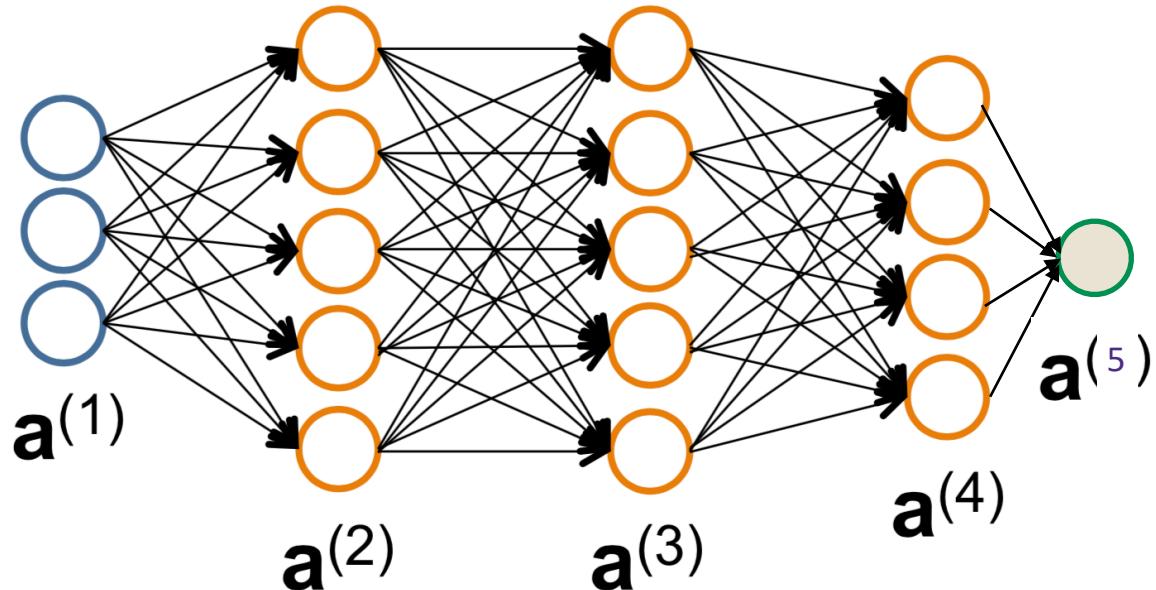

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$


$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:

$$\hat{y} = a^{(L+1)}$$

What do we need to run gradient descent?
 $\nabla_{\Theta} \mathcal{L}(y, \hat{y})$
Need to know \hat{y}

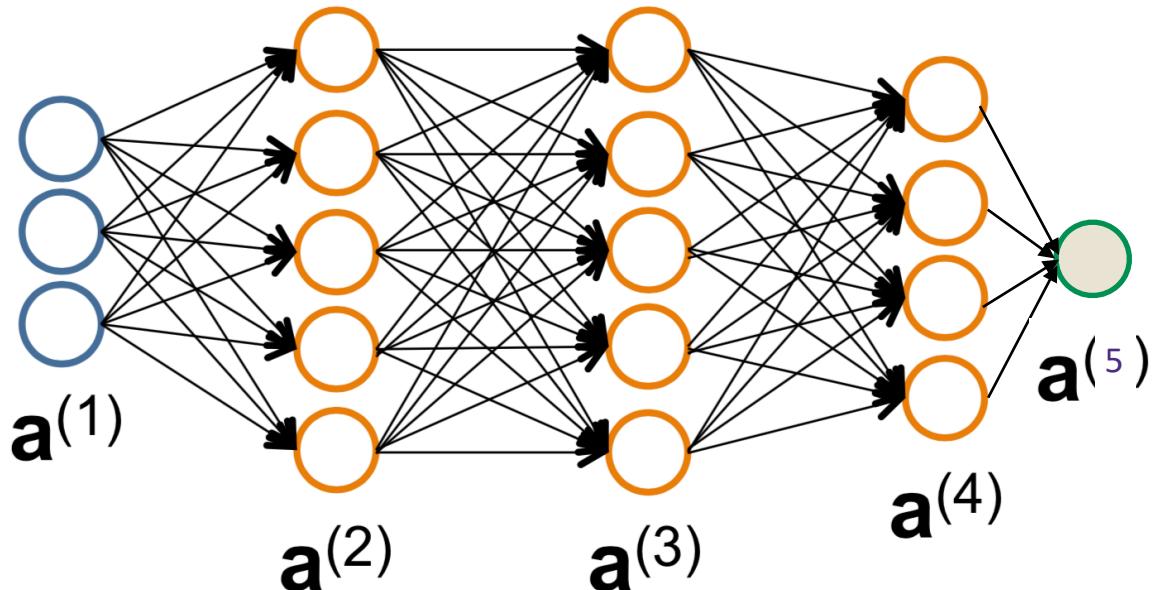

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:


$$\hat{y} = a^{(L+1)}$$

What do we need to run gradient descent?

$$\nabla_{\Theta} \mathcal{L}(y, \hat{y})$$

Need to know \hat{y}

How do we write the gradient

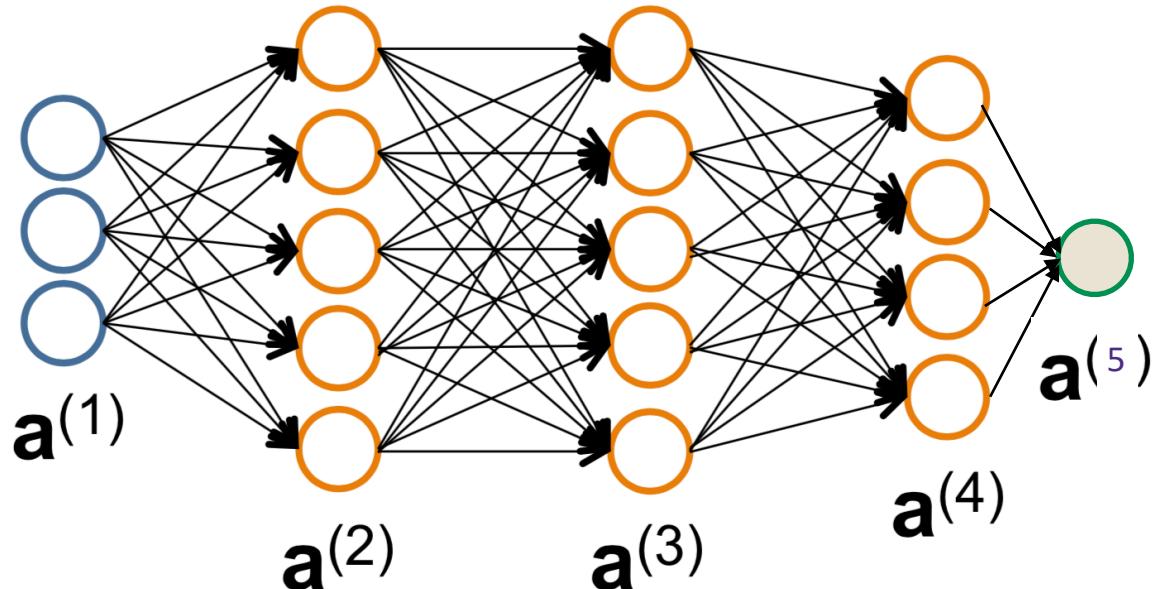

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:


$$\hat{y} = a^{(L+1)}$$

What do we need to run gradient descent?

$$\nabla_{\Theta} \mathcal{L}(y, \hat{y})$$

Need to know \hat{y}

How do we write the gradient
for each layer's parameters?

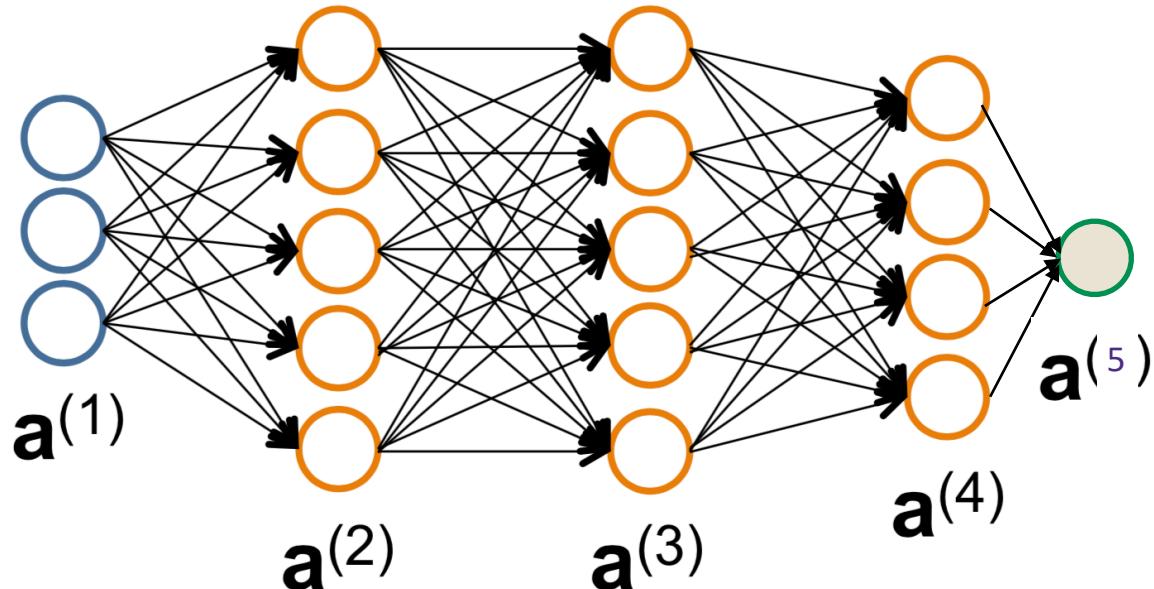

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:


$$\hat{y} = a^{(L+1)}$$

What do we need to run gradient descent?

$$\nabla_{\Theta} \mathcal{L}(y, \hat{y})$$

Need to know \hat{y}

How do we write the gradient
for each layer's parameters?

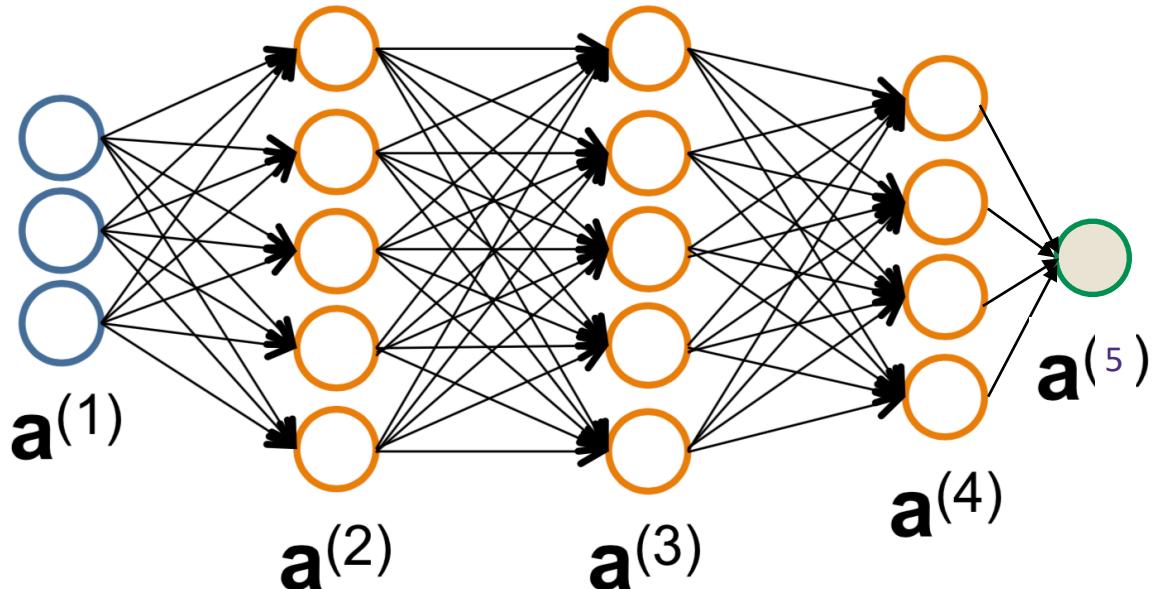

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Gradient descent

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:


$$\hat{y} = a^{(L+1)}$$

What do we need to run gradient descent?

$$\nabla_{\Theta} \mathcal{L}(y, \hat{y})$$

Need to know \hat{y}

How do we write the gradient
for each layer's parameters?

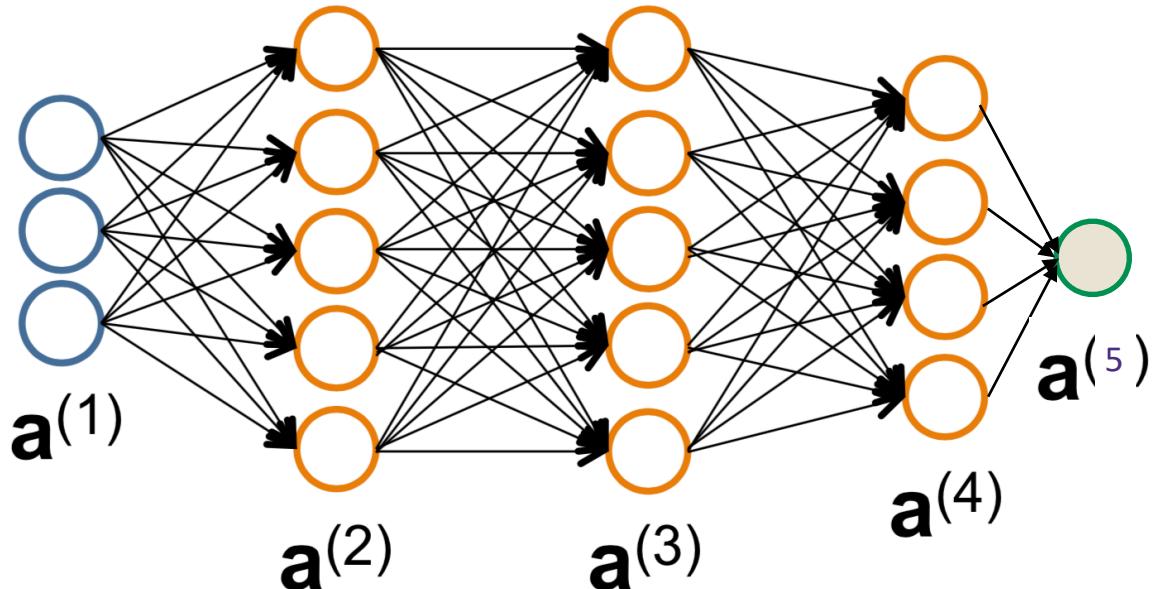

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Forward Propagation

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮


$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

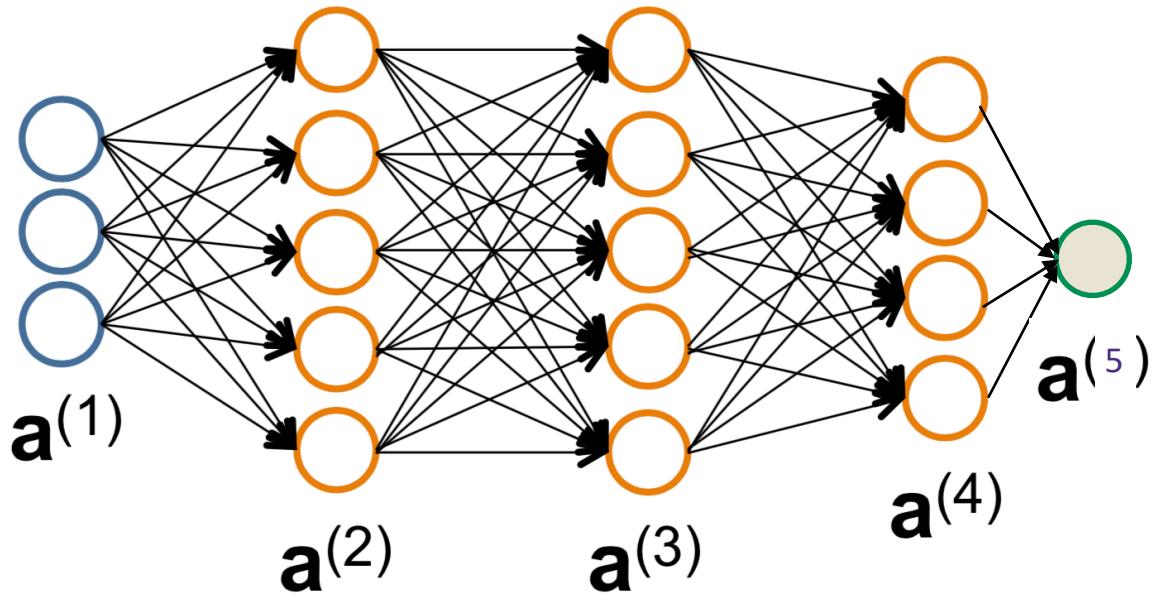

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Forward Propagation

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

:

$$a^{(l)} = g(z^{(l)})$$


$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

:

$$\hat{y} = a^{(L+1)}$$

- We are not writing the intercept at each layer for simplicity
- To compute gradients, we first run forward pass to get the intermediate representations $\{a^{(2)}, \dots, a^{(L)}\}$

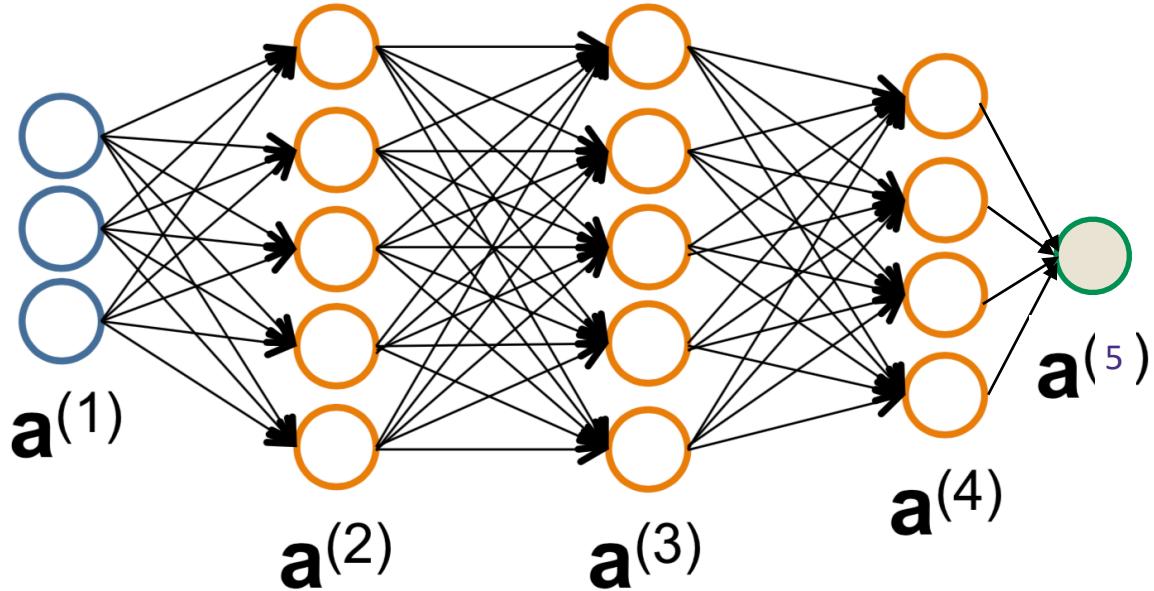

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Backprop

$$a^{(1)} = x \in \mathbb{R}^d$$

$$z^{(2)} = \Theta^{(1)} a^{(1)} \in \mathbb{R}^m$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Backprop

$$a^{(1)} = x \in \mathbb{R}^d$$

$$z^{(2)} = \Theta^{(1)} a^{(1)} \in \mathbb{R}^m$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

- Parameters: $\Theta^{(1)} \in \mathbb{R}^{m \times d}, \Theta^{(2)}, \dots, \Theta^{(L-1)} \in \mathbb{R}^{m \times m}$
- Naive implementation takes $O(L^2)$ time, as each layer requires a full forward pass (with $O(L)$ operations) and some backward pass
- Backprop requires only $O(L)$ operations

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

$$\delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

- Chain rule with $z_i^{(\ell+1)} = \Theta_{i,j}^{(\ell)} a_j^{(\ell)}$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

$$\delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

- Chain rule with $z_i^{(\ell+1)} = \Theta_{i,j}^{(\ell)} a_j^{(\ell)}$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

$$\delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

Recursively
computed in
one backward pass

- Chain rule with $z_i^{(\ell+1)} = \Theta_{i,j}^{(\ell)} a_j^{(\ell)}$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

$$\delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

Recursively

computed in

one backward pass

Computed

in the

forward pass

- Chain rule with $z_i^{(\ell+1)} = \Theta_{i,j}^{(\ell)} a_j^{(\ell)}$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

Train by Stochastic Gradient Descent:

$$\Theta_{i,j}^{(l)} \leftarrow \Theta_{i,j}^{(l)} - \eta \frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

$$\delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

$$\vdots$$
$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

$$\vdots$$
$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

$$\vdots$$
$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

$$\vdots$$
$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \underbrace{\frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}}}_{\delta_k^{(\ell+1)}} \cdot \underbrace{\frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

$$\vdots \\ a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

$$\vdots \\ \hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \underbrace{\frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}}}_{\delta_k^{(\ell+1)}} \cdot \underbrace{\frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}}_{\Theta_{k,i}^{(l)} g'(z_i^{(l)})}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

$$\vdots$$
$$a^{(l)} = q(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

$$\vdots$$
$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \underbrace{\frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}}}_{\delta_k^{(\ell+1)}} \cdot \underbrace{\frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}}_{\Theta_{k,i}^{(l)} g'(z_i^{(l)})}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

$$\vdots$$

$$a^{(l)} = q(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

$$\vdots$$

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \underbrace{\frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}}}_{\delta_k^{(\ell+1)}} \cdot \underbrace{\frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}}_{\Theta_{k,i}^{(l)} g'(z_i^{(l)})}$$

$$z_k^{(\ell+1)} = \sum_{i=1}^m \Theta_{k,i}^{(l)} g(z_i^{(l)})$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

$$\vdots$$

$$a^{(l)} = q(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$


$$a^{(l+1)} = g(z^{(l+1)})$$

$$\vdots$$

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \underbrace{\frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}}}_{\delta_k^{(\ell+1)}} \cdot \underbrace{\frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}}_{\Theta_{k,i}^{(l)} g'(z_i^{(l)})}$$

$$z_k^{(\ell+1)} = \sum_{i=1}^m \Theta_{k,i}^{(l)} g(z_i^{(l)})$$


$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}} \cdot \frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\begin{aligned}\delta_i^{(l)} &= \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}} \cdot \frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}} \\ &= \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)} g'(z_i^{(l)})\end{aligned}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$\begin{aligned}g(z) &= \frac{1}{1 + e^{-z}} & \delta_i^{(l+1)} &\triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \\ g'(z) &= g(z)(1 - g(z))\end{aligned}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\begin{aligned}\delta_i^{(l)} &= \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}} \cdot \frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}} \\ &= \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)} g'(z_i^{(l)}) \\ &= a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}\end{aligned}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$\begin{aligned}g(z) &= \frac{1}{1 + e^{-z}} & \delta_i^{(l+1)} &\triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \\ g'(z) &= g(z)(1 - g(z))\end{aligned}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}} \cdot \frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}$$

$$= \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)} g'(z_i^{(l)})$$

Computed
in the
forward pass

$$= a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l)}} = \sum_k \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_k^{(l+1)}} \cdot \frac{\partial z_k^{(l+1)}}{\partial z_i^{(l)}}$$

$$= \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)} g'(z_i^{(l)})$$

Computed
in the
forward pass

$$= a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$
$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

- We can recursively compute all $\delta^{(\ell)}$'s in a single backward pass

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

- We can recursively compute all $\delta^{(\ell)}$'s in a single backward pass
- And compute all gradients via

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$a^{(L+1)} = g(z^{(L+1)})$$
$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$a^{(L+1)} = g(z^{(L+1)})$$
$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\delta_i^{(L+1)} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(L+1)}} = \frac{\partial}{\partial z_i^{(L+1)}} [y \log(g(z^{(L+1)})) + (1 - y) \log(1 - g(z^{(L+1)}))]$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$a^{(L+1)} = g(z^{(L+1)})$$

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\begin{aligned} \delta_i^{(L+1)} &= \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(L+1)}} = \frac{\partial}{\partial z_i^{(L+1)}} [y \log(g(z^{(L+1)})) + (1-y) \log(1-g(z^{(L+1)}))] \\ &= \frac{y}{g(z^{(L+1)})} g'(z^{(L+1)}) - \frac{1-y}{1-g(z^{(L+1)})} g'(z^{(L+1)}) \end{aligned}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1-y) \log(1-\hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \qquad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$a^{(L+1)} = g(z^{(L+1)})$$

$$\hat{y} = a^{(L+1)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\begin{aligned} \delta_i^{(L+1)} &= \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(L+1)}} = \frac{\partial}{\partial z_i^{(L+1)}} [y \log(g(z^{(L+1)})) + (1-y) \log(1-g(z^{(L+1)}))] \\ &= \frac{y}{g(z^{(L+1)})} g'(z^{(L+1)}) - \frac{1-y}{1-g(z^{(L+1)})} g'(z^{(L+1)}) \\ &= y - g(z^{(L+1)}) = y - a^{(L+1)} \end{aligned}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1-y) \log(1-\hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \qquad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

$$g'(z) = g(z)(1 - g(z))$$

Backprop

Recursive Algorithm!

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$

⋮

$$a^{(l)} = g(z^{(l)})$$

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

$$\delta^{(L+1)} = y - a^{(L+1)}$$

$$\delta_i^{(l)} = a_i^{(l)}(1 - a_i^{(l)}) \sum_k \delta_k^{(l+1)} \cdot \Theta_{k,i}^{(l)}$$

$$\frac{\partial \mathcal{L}(y, \hat{y})}{\partial \Theta_{i,j}^{(l)}} = \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}} \cdot \frac{\partial z_i^{(l+1)}}{\partial \Theta_{i,j}^{(l)}} =: \delta_i^{(l+1)} \cdot a_j^{(l)}$$

$$\mathcal{L}(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}} \quad \delta_i^{(l+1)} \triangleq \frac{\partial \mathcal{L}(y, \hat{y})}{\partial z_i^{(l+1)}}$$

Backpropagation

Set $\Delta_{ij}^{(l)} = 0 \quad \forall l, i, j$

(Used to accumulate gradient)

For each training instance (x_k, y_k)

Set $\mathbf{a}^{(1)} = x_k$

Compute $\{\mathbf{a}^{(2)}, \dots, \mathbf{a}^{(L)}\}$ via forward propagation

Compute $\boldsymbol{\delta}^{(L)} = \mathbf{a}^{(L)} - y_k$

Compute errors $\{\boldsymbol{\delta}^{(L-1)}, \dots, \boldsymbol{\delta}^{(2)}\}$

Compute gradients $\Delta_{ij}^{(l)} = \Delta_{ij}^{(l)} + a_j^{(l)} \delta_i^{(l+1)}$

Compute avg regularized gradient $D_{ij}^{(l)} = \begin{cases} \frac{1}{n} \Delta_{ij}^{(l)} + \lambda \Theta_{ij}^{(l)} & \text{if } j \neq 0 \\ \frac{1}{n} \Delta_{ij}^{(l)} & \text{otherwise} \end{cases}$

Intercept do not have regularizer

Average loss + ℓ_2 regularizer

$$\frac{1}{n} \sum_{k=1}^n L(y_k, \hat{y}) + \lambda \|\Theta\|_2^2$$

Convolutional Neural Networks

W

Multi-layer Neural Network

$$a^{(1)} = x$$

$$z^{(2)} = \Theta^{(1)} a^{(1)}$$

$$a^{(2)} = g(z^{(2)})$$


⋮

$$z^{(l+1)} = \Theta^{(l)} a^{(l)}$$

$$a^{(l+1)} = g(z^{(l+1)})$$

⋮

$$\hat{y} = a^{(L+1)}$$

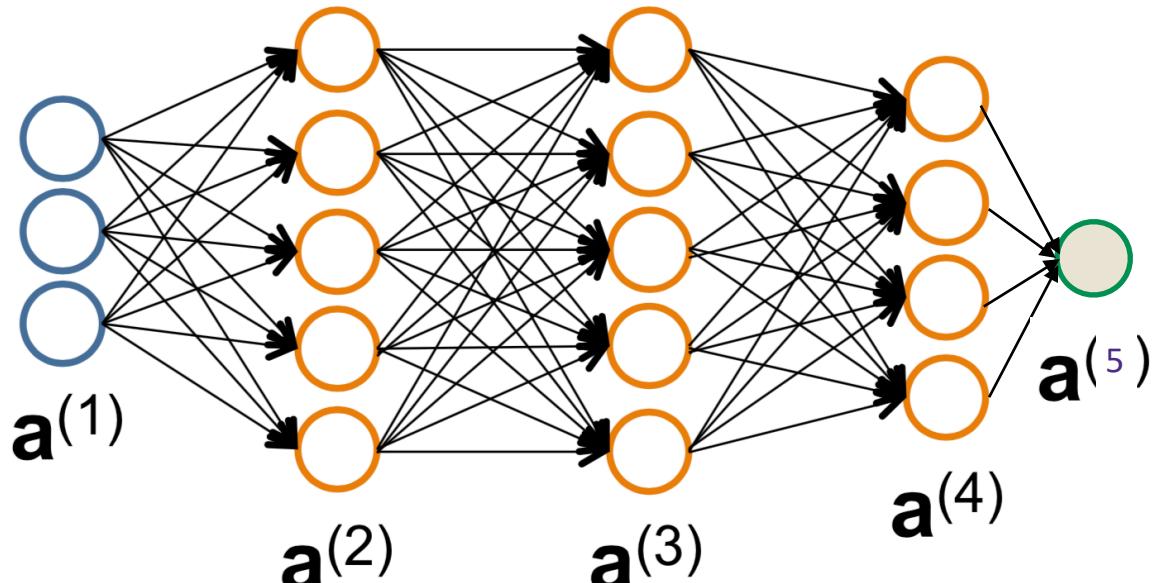


$$L(y, \hat{y}) = y \log(\hat{y}) + (1 - y) \log(1 - \hat{y})$$

$$g(z) = \frac{1}{1 + e^{-z}}$$

Binary
Logistic
Regression


Neural Network Architecture

- The neural network architecture is defined by
 - the number of layers (depth of a network),
 - the number of nodes in each layer (width of a layer),
 - and also by **allowable edges** and **shared weights**.

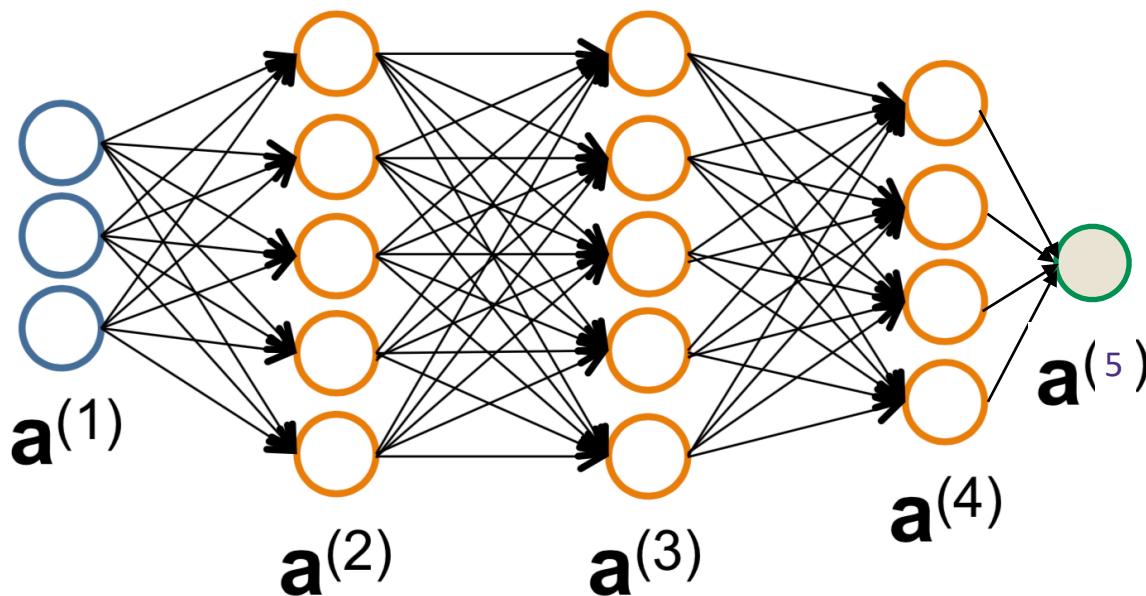

Neural Network Architecture

The neural network architecture is defined by the number of layers, and the number of nodes in each layer, and also by **allowable edges** and **shared weights**.

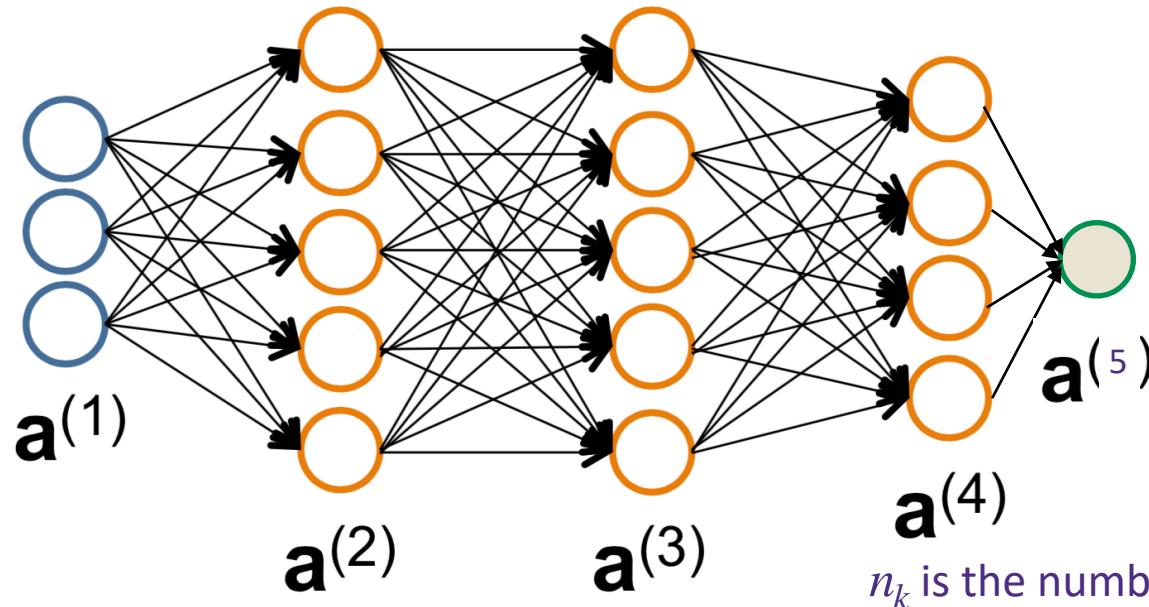

We say a layer is **Fully Connected (FC)** if all linear mappings from the current layer to the next layer are permissible.



$$a^{(k+1)} = g(\Theta a^{(k)}) \quad \text{for any } \Theta \in \mathbb{R}^{n_{k+1} \times n_k}$$

A lot of parameters!! $n_1 n_2 + n_2 n_3 + \cdots + n_L n_{L+1}$


Neural Network Architecture

- Objects in an image are often **localized in space** so to find the faces in an image, not every pixel is important for classification
- Makes sense to drag a window across an image, focusing a local region at a time
- Although images are two-dimensional, we use one-dimensional examples to illustrate the main idea
- Similarly, to identify edges or other local structure, it makes sense to only look at **local information**

Finding faces require only local patterns

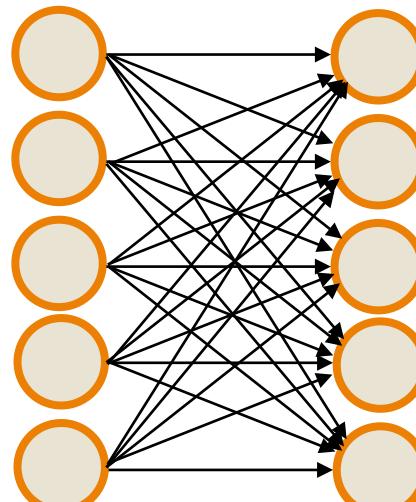
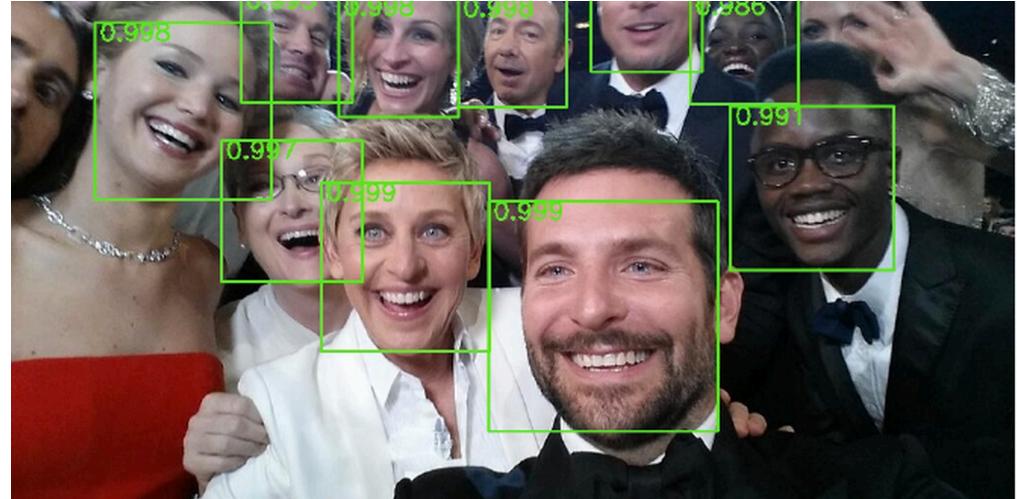


This is a
fully connected layer

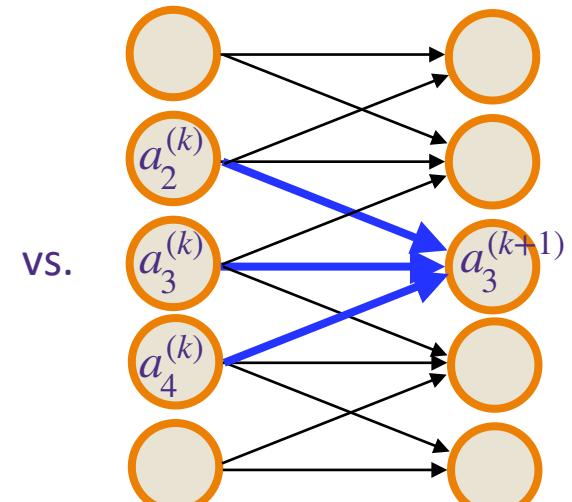

This has sparse and
local connections

Neural Network Architecture

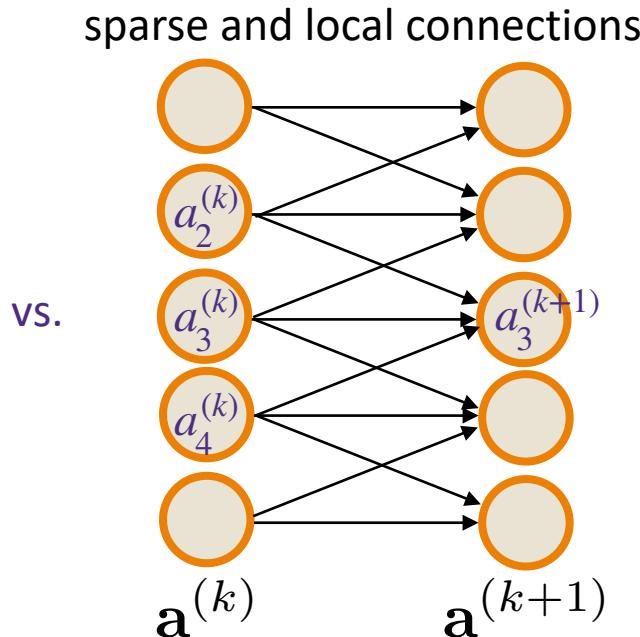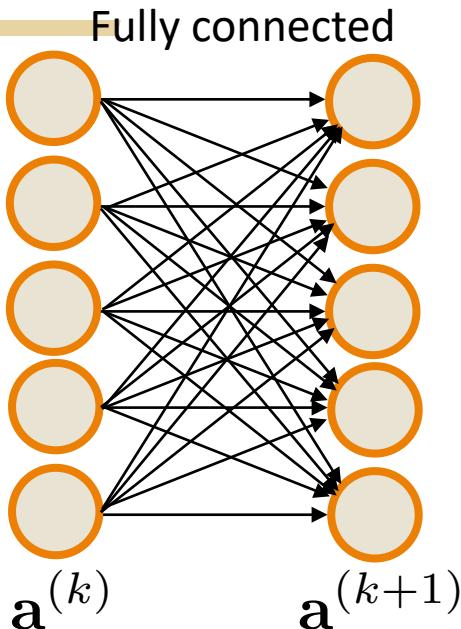

$$\Theta^{(k)} = \begin{bmatrix} \Theta_{0,0} & \Theta_{0,1} & \Theta_{0,2} & \Theta_{0,3} & \Theta_{0,4} \\ \Theta_{1,0} & \Theta_{1,1} & \Theta_{1,2} & \Theta_{1,3} & \Theta_{1,4} \\ \Theta_{2,0} & \Theta_{2,1} & \Theta_{2,2} & \Theta_{2,3} & \Theta_{2,4} \\ \Theta_{3,0} & \Theta_{3,1} & \Theta_{3,2} & \Theta_{3,3} & \Theta_{3,4} \\ \Theta_{4,0} & \Theta_{4,1} & \Theta_{4,2} & \Theta_{4,3} & \Theta_{4,4} \end{bmatrix}$$

$$\Theta^{(k)} = \begin{bmatrix} \Theta_{0,0} & \Theta_{0,1} & 0 & 0 & 0 \\ \Theta_{1,0} & \Theta_{1,1} & \Theta_{1,2} & 0 & 0 \\ 0 & \Theta_{2,1} & \Theta_{2,2} & \Theta_{2,3} & 0 \\ 0 & 0 & \Theta_{3,2} & \Theta_{3,3} & \Theta_{3,4} \\ 0 & 0 & 0 & \Theta_{4,3} & \Theta_{4,4} \end{bmatrix}$$

of Parameters
in this layer:




$$n^2$$

$$3n - 2$$

$$\mathbf{a}_i^{(k+1)} = g \left(\sum_{j=0}^{n-1} \Theta_{i,j} \mathbf{a}_j^{(k)} \right)$$

Neural Network Architecture

Shift invariance: A local pattern of interest can appear anywhere in the image

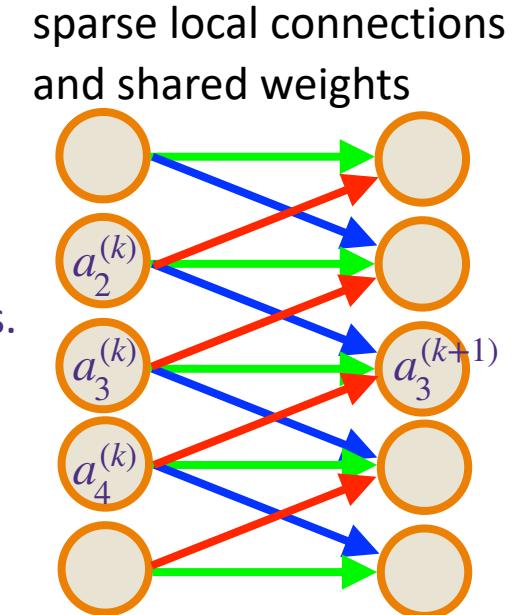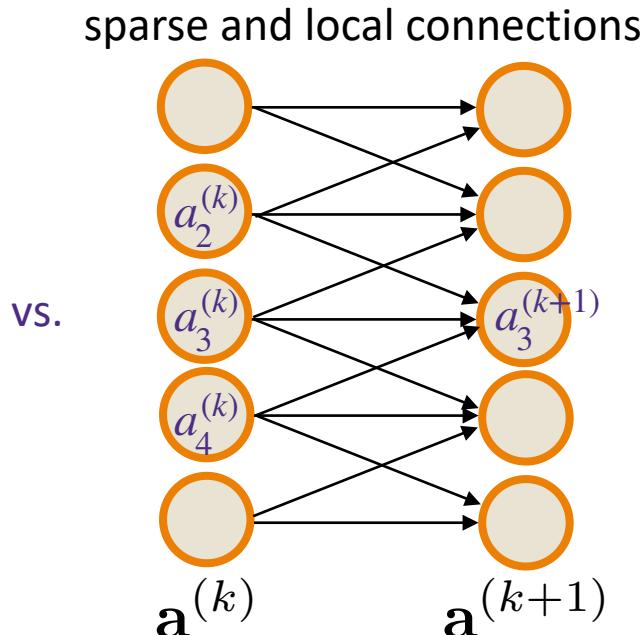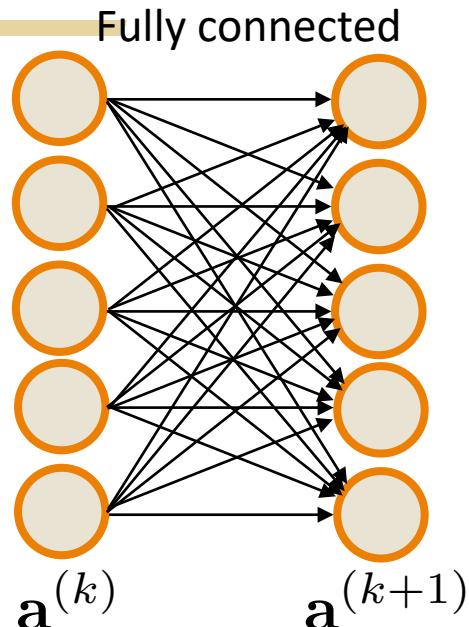

$$\Theta^{(k)} = \begin{bmatrix} \Theta_{0,0} & \Theta_{0,1} & \Theta_{0,2} & \Theta_{0,3} & \Theta_{0,4} \\ \Theta_{1,0} & \Theta_{1,1} & \Theta_{1,2} & \Theta_{1,3} & \Theta_{1,4} \\ \Theta_{2,0} & \Theta_{2,1} & \Theta_{2,2} & \Theta_{2,3} & \Theta_{2,4} \\ \Theta_{3,0} & \Theta_{3,1} & \Theta_{3,2} & \Theta_{3,3} & \Theta_{3,4} \\ \Theta_{4,0} & \Theta_{4,1} & \Theta_{4,2} & \Theta_{4,3} & \Theta_{4,4} \end{bmatrix}$$

$$\Theta^{(k)} = \begin{bmatrix} \Theta_{0,0} & \Theta_{0,1} & 0 & 0 & 0 \\ \Theta_{1,0} & \Theta_{1,1} & \Theta_{1,2} & 0 & 0 \\ 0 & \Theta_{2,1} & \Theta_{2,2} & \Theta_{2,3} & 0 \\ 0 & 0 & \Theta_{3,2} & \Theta_{3,3} & \Theta_{3,4} \\ 0 & 0 & 0 & \Theta_{4,3} & \Theta_{4,4} \end{bmatrix}$$

$$\Theta^{(k)} = \begin{bmatrix} \theta_1 & \theta_2 & 0 & 0 & 0 \\ \theta_0 & \theta_1 & \theta_2 & 0 & 0 \\ 0 & \theta_0 & \theta_1 & \theta_2 & 0 \\ 0 & 0 & \theta_0 & \theta_1 & \theta_2 \\ 0 & 0 & 0 & \theta_0 & \theta_1 \end{bmatrix}$$

of Parameters
in this layer:

$$n^2$$

$$3n - 2$$


$$3$$

$$\mathbf{a}_i^{(k+1)} = g \left(\sum_{j=0}^{n-1} \Theta_{i,j} \mathbf{a}_j^{(k)} \right)$$

$$\mathbf{a}_i^{(k+1)} = g \left(\sum_{j=-(m-1)/2}^{(m-1)/2} \theta_{j+(m-1)/2} a_{i+j}^{(k)} \right)$$

Neural Network Architecture


Fully Connected (FC) Layer

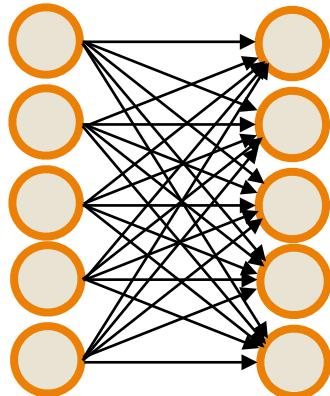

$$\begin{bmatrix} \Theta_{0,0} & \Theta_{0,1} & \Theta_{0,2} & \Theta_{0,3} & \Theta_{0,4} \\ \Theta_{1,0} & \Theta_{1,1} & \Theta_{1,2} & \Theta_{1,3} & \Theta_{1,4} \\ \Theta_{2,0} & \Theta_{2,1} & \Theta_{2,2} & \Theta_{2,3} & \Theta_{2,4} \\ \Theta_{3,0} & \Theta_{3,1} & \Theta_{3,2} & \Theta_{3,3} & \Theta_{3,4} \\ \Theta_{4,0} & \Theta_{4,1} & \Theta_{4,2} & \Theta_{4,3} & \Theta_{4,4} \end{bmatrix}$$

$$\mathbf{a}_i^{(k+1)} = g \left(\sum_{j=0}^{n-1} \Theta_{i,j} \mathbf{a}_j^{(k)} \right)$$

Convolutional (CONV) Layer (1 filter)

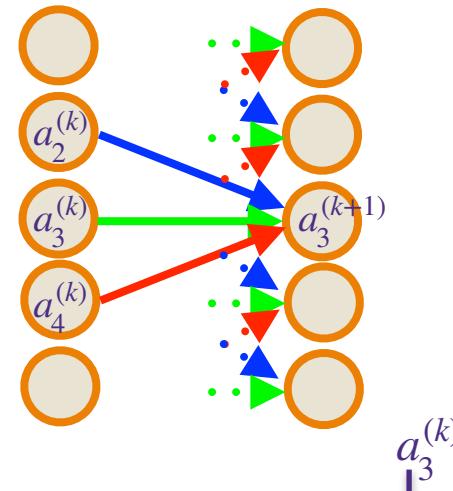

Filter with $m = 3$

$$a_3^{(k+1)} \rightarrow \begin{bmatrix} \theta_1 & \theta_2 & 0 & 0 \\ \theta_0 & \theta_1 & \theta_2 & 0 \\ 0 & \boxed{\theta_0 & \theta_1 & \theta_2} & 0 \\ 0 & 0 & \theta_0 & \theta_1 & \theta_2 \\ 0 & 0 & 0 & \theta_0 & \theta_1 \end{bmatrix}$$

$$\mathbf{a}_i^{(k+1)} = g \left(\sum_{j=-(m-1)/2}^{(m-1)/2} \theta_{j+(m-1)/2} a_{i+j}^{(k)} \right) = g([\theta \star \mathbf{a}^{(k)}]_i)$$

\star = Convolution


$\theta = (\theta_0, \dots, \theta_{m-1}) \in \mathbb{R}^m$ is referred to as a "filter"

Because of shift invariance and locality of computer vision tasks, convolution is extremely powerful

Example (1d convolution)

- Notice that the indexing of the convolution is slightly different from previous slide
- There are many different ways to write the same convolution

$$(\theta * x)_i = \sum_{j=0}^{m-1} \theta_j x_{i+j}$$

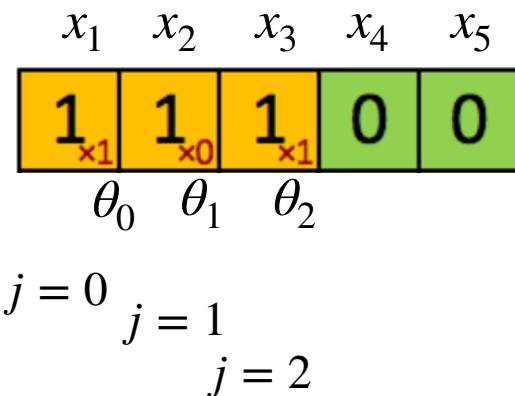

x_1	x_2	x_3	x_4	x_5
1	1	1	0	0

Input $x \in \mathbb{R}^n$

θ_0	θ_1	θ_2
1	0	1

Filter $\theta \in \mathbb{R}^m$

$i = 1$

2		
---	--	--

Output $\theta * x \in \mathbb{R}^{n-m+1}$


Example (1d convolution)

x_1	x_2	x_3	x_4	x_5
1	1	1	0	0

Input $x \in \mathbb{R}^n$

θ_0	θ_1	θ_2
1	0	1

Filter $\theta \in \mathbb{R}^m$

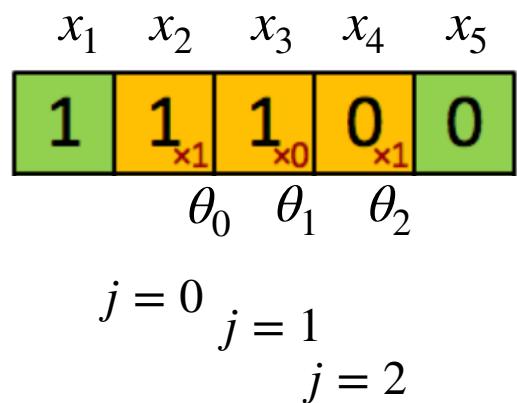

Output $\theta * x \in \mathbb{R}^{n-m+1}$

Example (1d convolution)

$$(\theta * x)_i = \sum_{j=0}^{m-1} \theta_j x_{i+j}$$

x_1	x_2	x_3	x_4	x_5
1	1	1	0	0


Input $x \in \mathbb{R}^n$

θ_0	θ_1	θ_2
1	0	1

Filter $\theta \in \mathbb{R}^m$

x_1	x_2	x_3	x_4	x_5
1	1	1	0	0

$$\begin{matrix} & \theta_0 & \theta_1 & \theta_2 \\ j = 0 & & j = 1 & \\ & j = 2 & & \end{matrix}$$

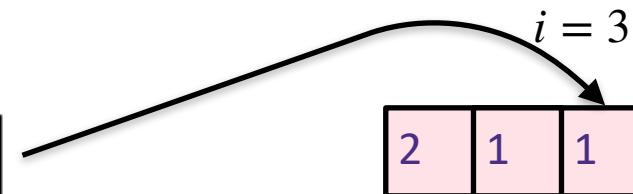


Output $\theta * x \in \mathbb{R}^{n-m+1}$


2	1	1
---	---	---

1d convolution


- Each filter finds a specific pattern over the input

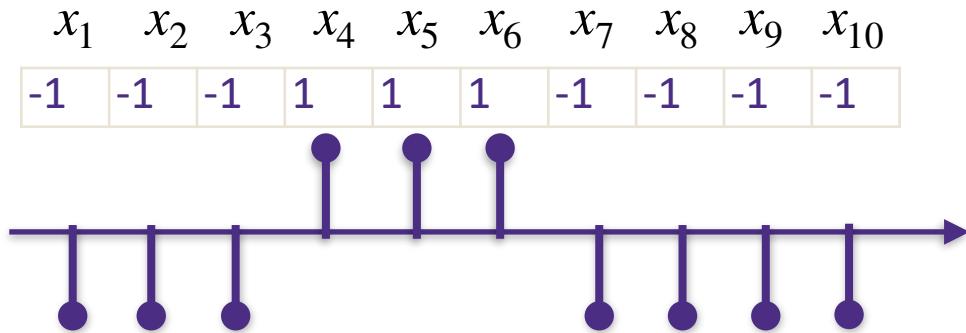

Filter 1

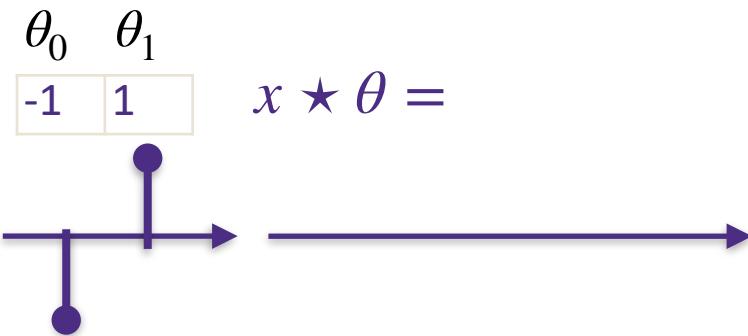

Filter 2

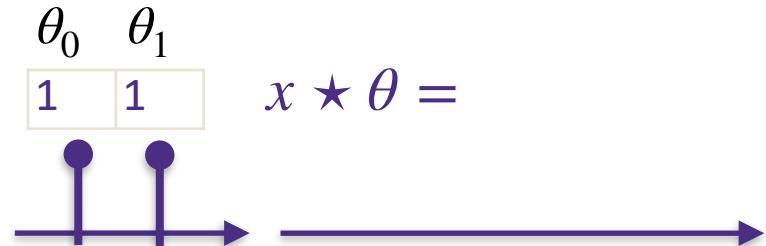

- We use many such convolutional filters per layer in practice
- Each convolutional filter output vector (or a matrix if 2D convolution) is called a channel

Convolution of images (2d convolution)

$$(I * K)(i, j) = \sum_m \sum_n I(i + m, j + n)K(m, n)$$

1	1	1	0	0
0	1	1	1	0
0	0	1	1	1
0	0	1	1	0
0	1	1	0	0

1	0	1
0	1	0
1	0	1

Filter K

Image I

1 x1	1 x0	1 x1	0	0
0 x0	1 x1	1 x0	1	0
0 x1	0 x0	1 x1	1	1
0	0	1	1	0
0	1	1	0	0

Image

4		

Convolved
Feature

$$I * K$$

Convolution of images (2d convolution)

$$(I * K)(i, j) = \sum_m \sum_n I(i + m, j + n)K(m, n)$$

1	1	1	0	0
0	1	1	1	0
0	0	1	1	1
0	0	1	1	0
0	1	1	0	0

1	0	1
0	1	0
1	0	1

Filter K

Image I

1 x1	1 x0	1 x1	0	0
0 x0	1 x1	1 x0	1	0
0 x1	0 x0	1 x1	1	1
0	0	1	1	0
0	1	1	0	0

Image

4		

Convolved
Feature

$$I * K$$

Convolution of images

- These are hand-crafted filters, to illustrate what the weights of a filter mean
- Filter in a Convolutional Neural Network (CNN) is learned, and we might be able to interpret what we learned

$$(I * K)(i, j) = \sum_m \sum_n I(i + m, j + n)K(m, n)$$

Image I




Operation	Filter K	Convolved Image $I * K$
Edge detection	$\begin{bmatrix} 1 & 0 & -1 \\ 0 & 0 & 0 \\ -1 & 0 & 1 \end{bmatrix}$	
	$\begin{bmatrix} 0 & 1 & 0 \\ 1 & -4 & 1 \\ 0 & 1 & 0 \end{bmatrix}$	
	$\begin{bmatrix} -1 & -1 & -1 \\ -1 & 8 & -1 \\ -1 & -1 & -1 \end{bmatrix}$	
Sharpen	$\begin{bmatrix} 0 & -1 & 0 \\ -1 & 5 & -1 \\ 0 & -1 & 0 \end{bmatrix}$	
Box blur (normalized)	$\frac{1}{9} \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$	
Gaussian blur (approximation)	$\frac{1}{16} \begin{bmatrix} 1 & 2 & 1 \\ 2 & 4 & 2 \\ 1 & 2 & 1 \end{bmatrix}$	

Stacking convolved images

$$K \in \mathbb{R}^{m \times m \times r}$$

- If we use a convolutional layer with 1 filter of size $m \times m \times r = 6 \times 6 \times 3$, then the output is a matrix of dimension $(n+1-m) \times (n+1-m) = 27 \times 27$

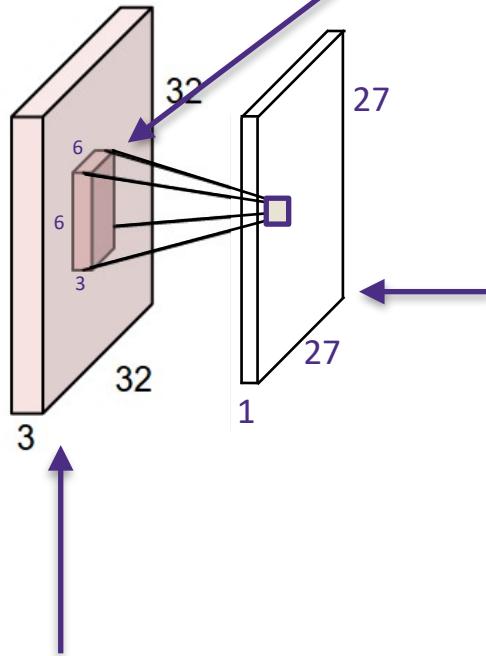


$$x \star K \in \mathbb{R}^{(n+1-m) \times (n+1-m)}$$

- Input is a multi-array or a tensor, because it has 3 color channels


$$x \in \mathbb{R}^{n \times n \times r}$$

Stacking convolved images

- Typical convolutional layer has multiple filters to capture multiple patterns
- Each one is called a channel
- Each channel has a filter of the same size $m \times m \times r$ but with different weights

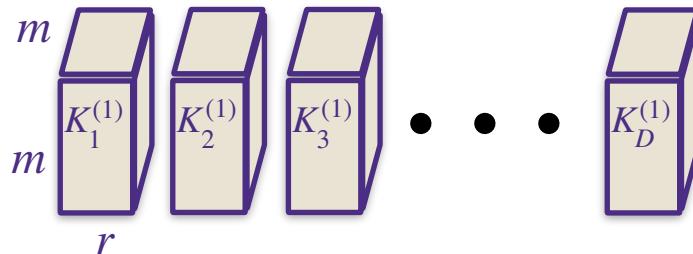


- Each channel outputs a matrix of dimension $(n+1-m) \times (n+1-m)$
- Put together the output is a tensor of dimension $(n+1-m) \times (n+1-m) \times D$

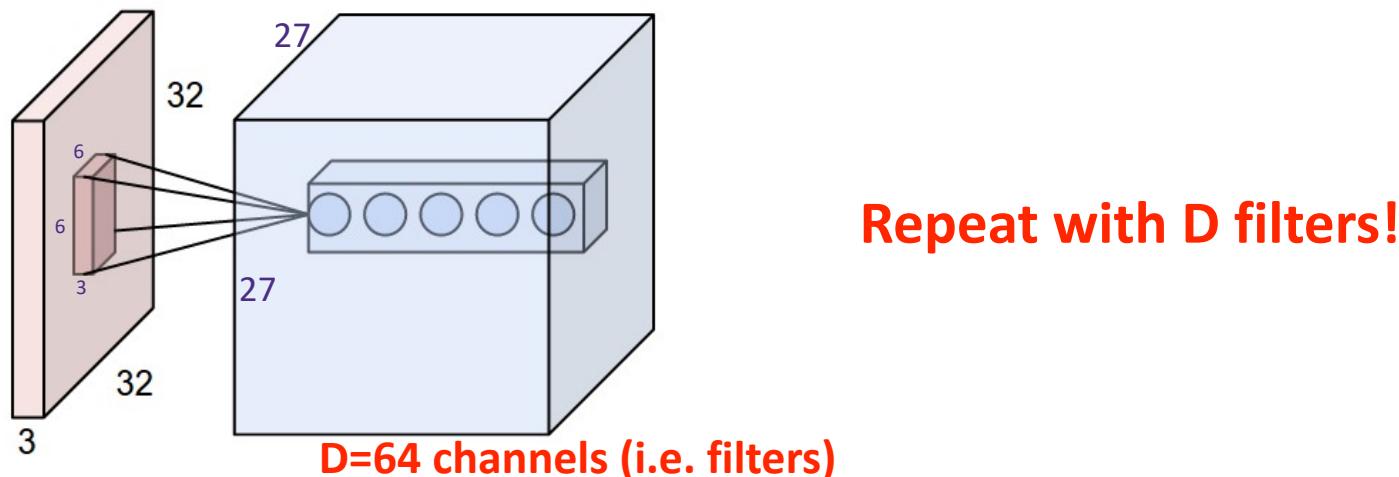


Max Pooling gives a summary of a region

Pooling reduces the dimension and can be interpreted as “This filter had a high response in this general region”

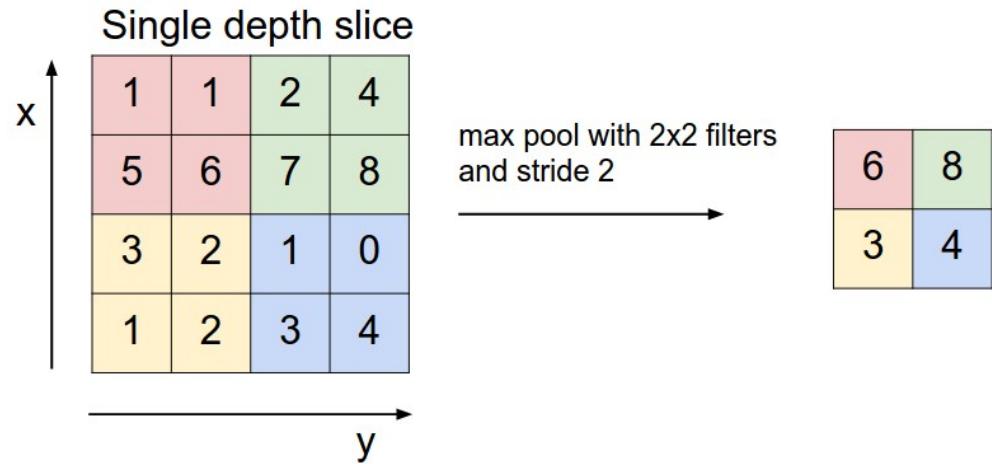


27x27x64




14x14x64


pool
→



Pooling Convolution layer

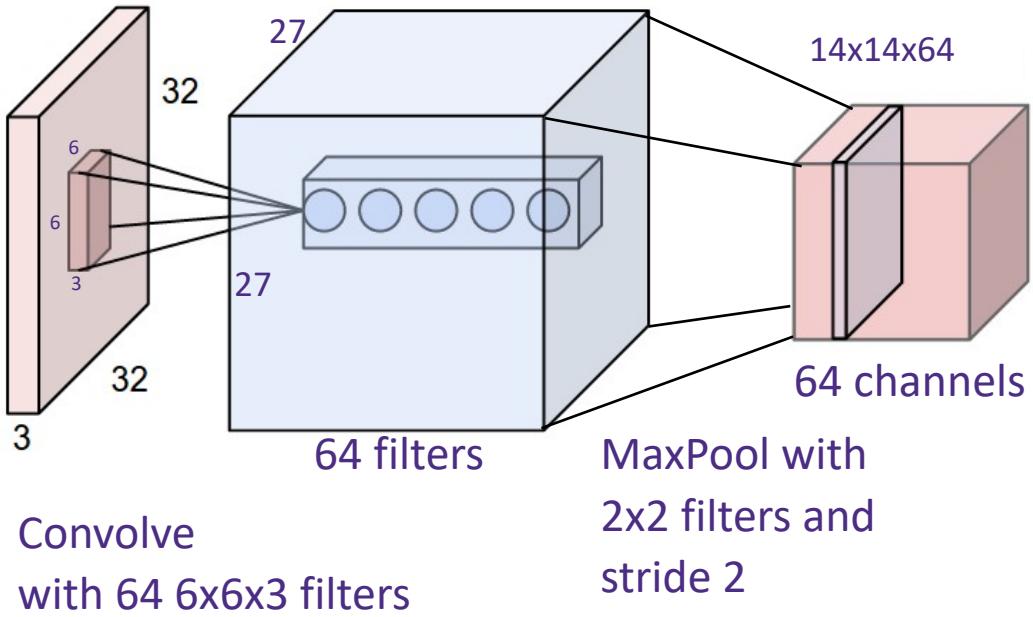

Flattening

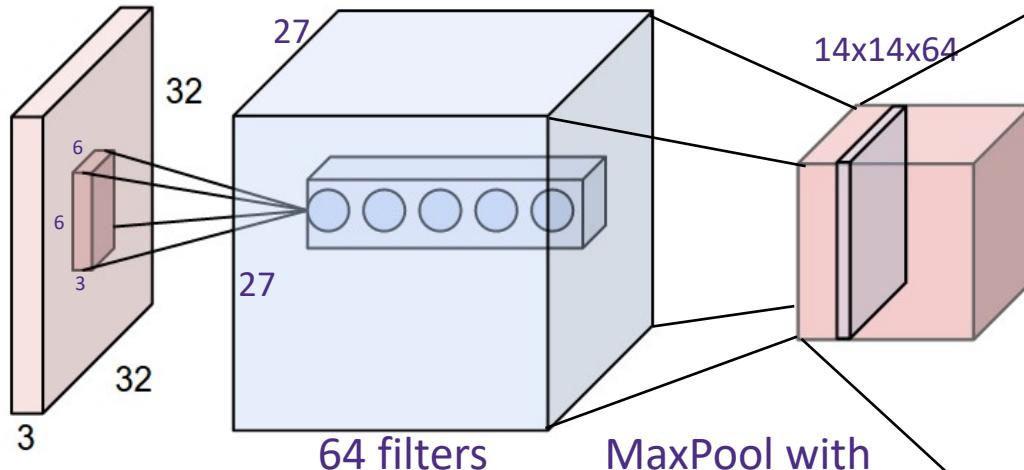


Convolve
with 64 $6 \times 6 \times 3$ filters

MaxPool with
 2×2 filters and
stride 2

Flatten into a single
vector of size
 $14 \times 14 \times 64 = 12544$


Training Convolutional Networks

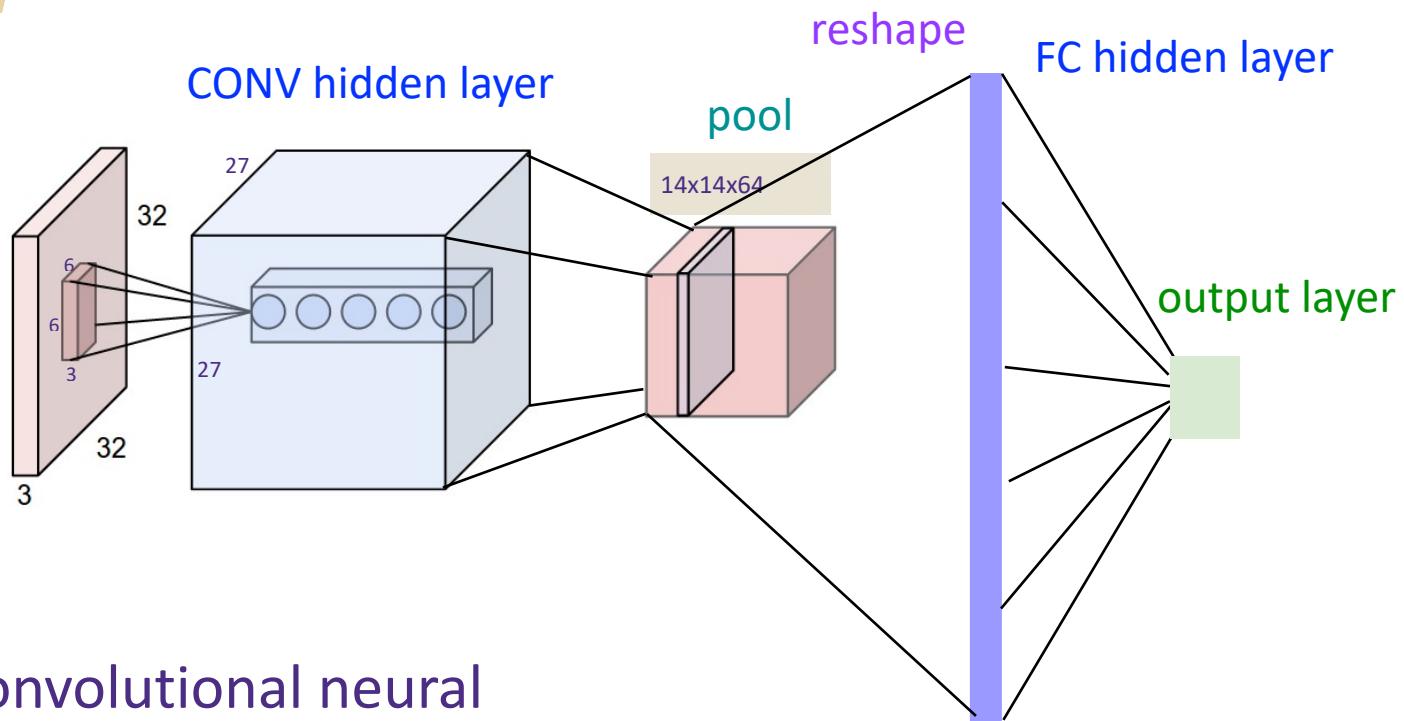


Recall: Convolutional neural networks (CNN) are just regular fully connected (FC) neural networks with some connections removed and some weights shared.


Train with SGD!

Training Convolutional Networks

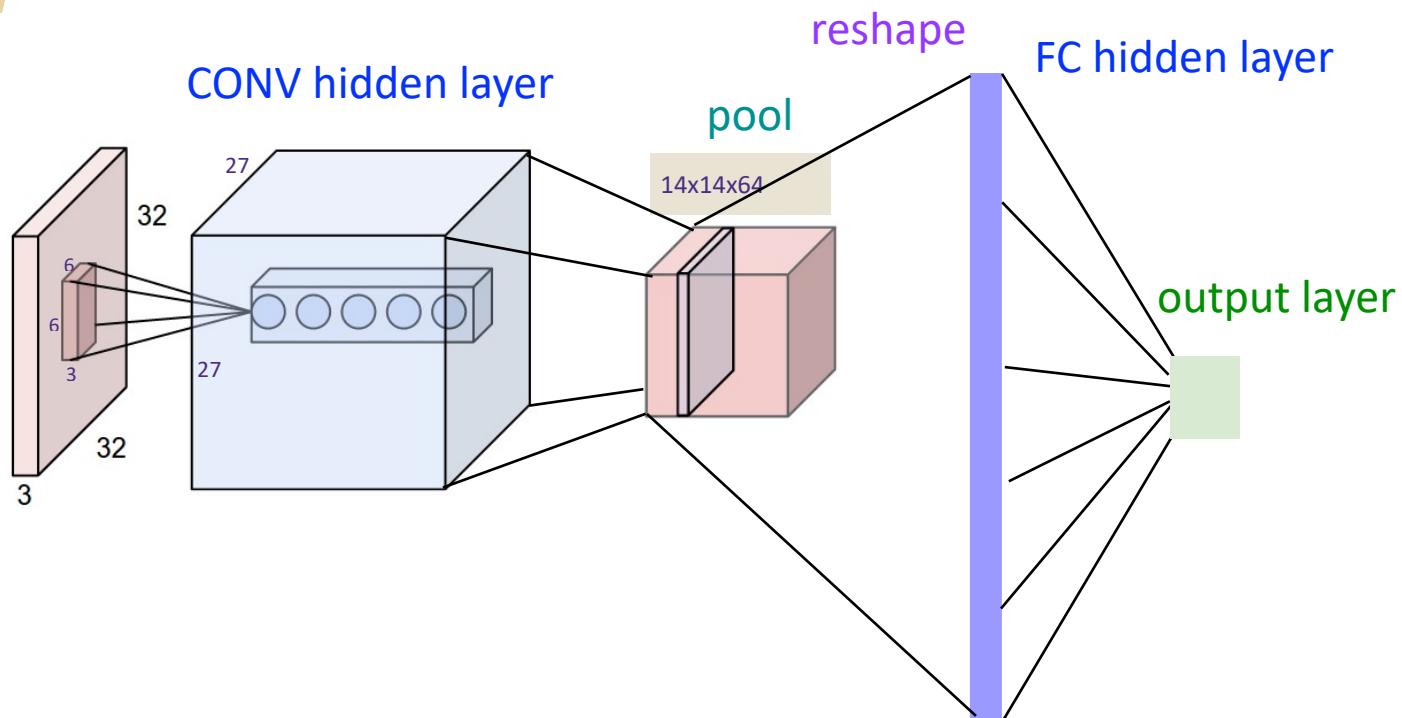


Real example network: LeNet

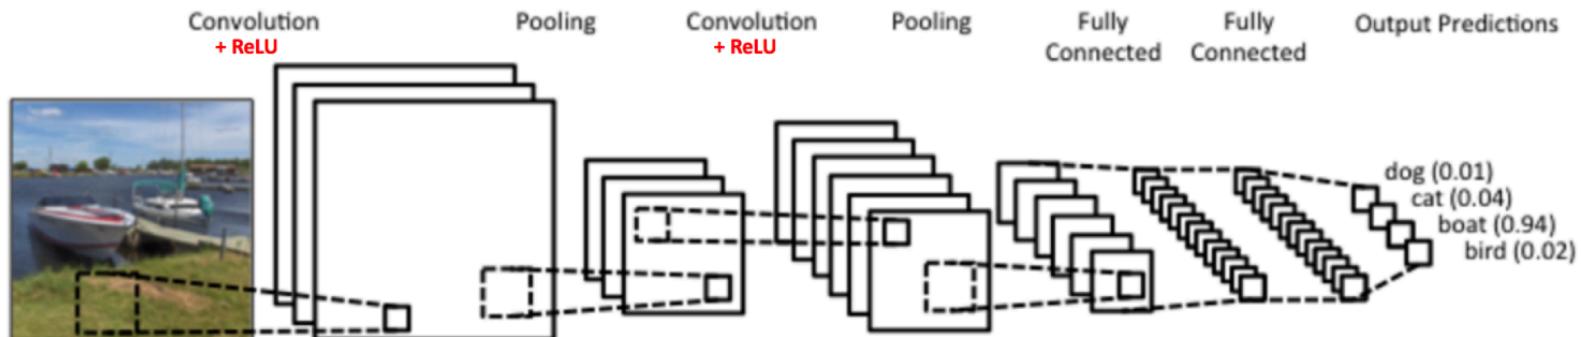

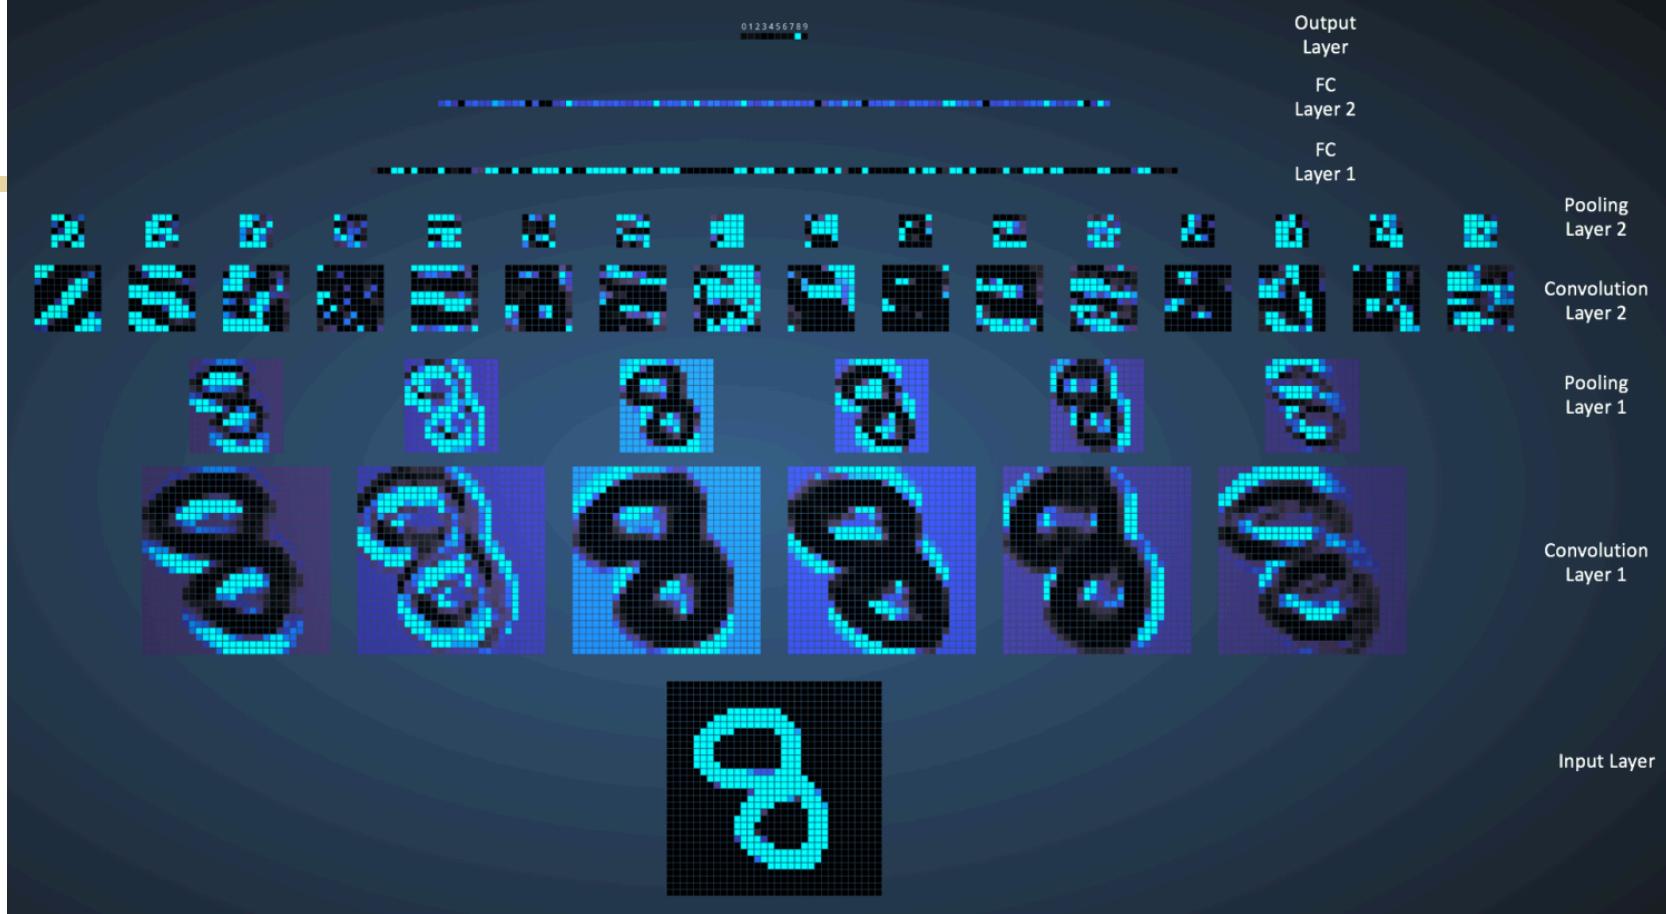

Real example network: LeNet

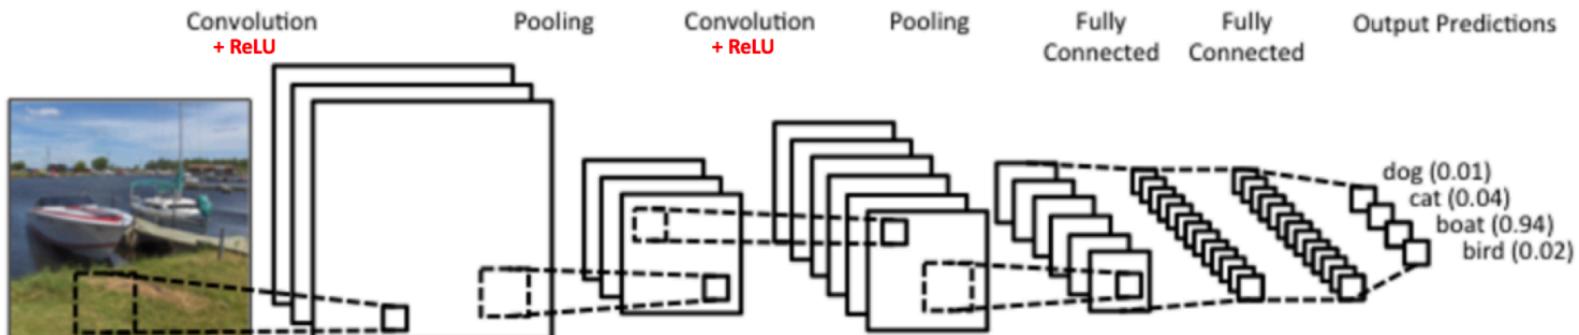



Real networks

Modern networks have dozens of parameters to tune.

Data augmentation?
Batch norm?

ReLU leakiness
slope

Learning rate schedule

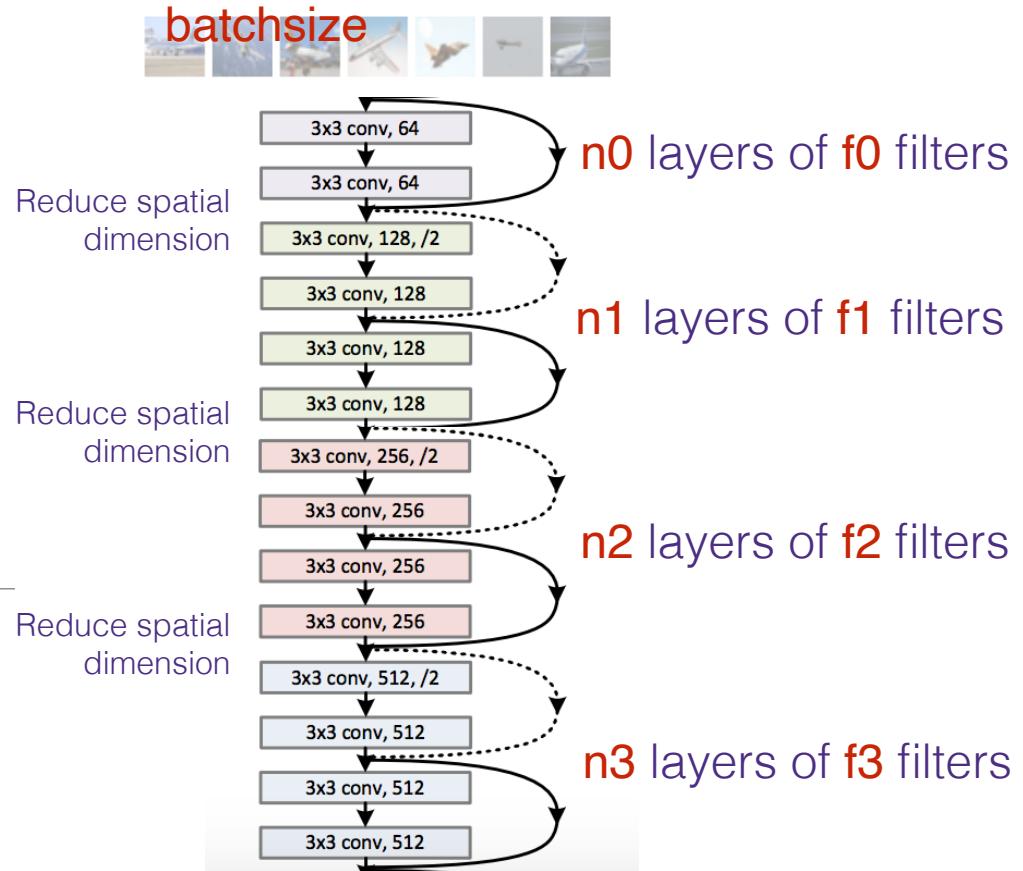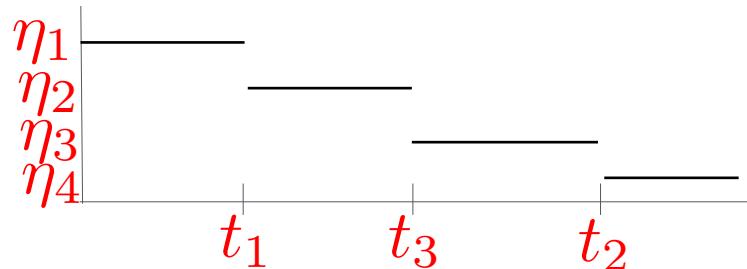

Remarks

- Convolution is a fundamental operation in signal processing. Instead of hand-engineering the filters (e.g., Fourier, Wavelets, etc.) Deep Learning **learns** the filters and CONV layers with **back-propagation**, replacing fully connected (FC) layers with convolutional (CONV) layers
- **Pooling** is a dimensionality reduction operation that summarizes the output of convolving the input with a filter
- Typically the last few layers are **Fully Connected (FC)**, with the interpretation that the CONV layers are feature extractors, preparing input for the final FC layers. Can replace last layers and retrain on different dataset+task.
- Just as hard to train as regular neural networks.
- More exotic network architectures for specific tasks

Vision transformers

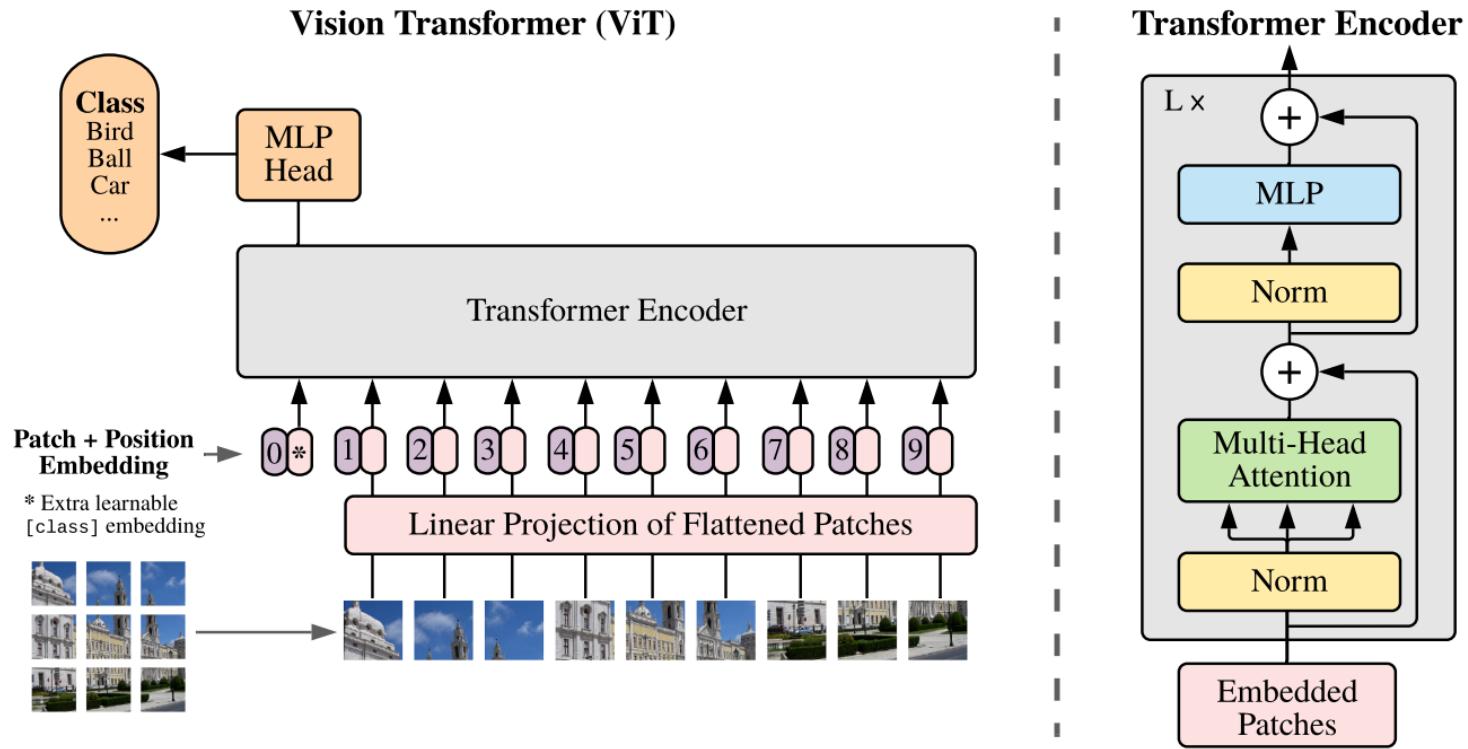


Figure 1: Model overview. We split an image into fixed-size patches, linearly embed each of them, add position embeddings, and feed the resulting sequence of vectors to a standard Transformer encoder. In order to perform classification, we use the standard approach of adding an extra learnable “classification token” to the sequence. The illustration of the Transformer encoder was inspired by Vaswani et al. (2017).

2d Convolution Layer

Example: 200x200 image

- ▶ Fully-connected, 400,000 hidden units = 16 billion parameters
- ▶ Locally-connected, 400,000 hidden units 10x10 fields = 40 million params or channels or filter
- ▶ Local connections capture local dependencies

