

Announcements

Midterm due now

Project 2 artifact winners

Project 3 out today (help session end-of-class)

1

Recognition



The "Margaret Thatcher Illusion", by Peter Thompson

Readings

- C. Bishop, "Neural Networks for Pattern Recognition", Oxford University Press, 1998, Chapter 1.
- [Szeliski, Chapter 14.2.1 \(eigenfaces\)](#)

Recognition



The "Margaret Thatcher Illusion", by Peter Thompson

What do we mean by "recognition"?


Next 15 slides adapted from Li, Fergus, & Torralba's excellent [short course](#) on category and object recognition



Verification: is that a lamp?




Detection: are there people?

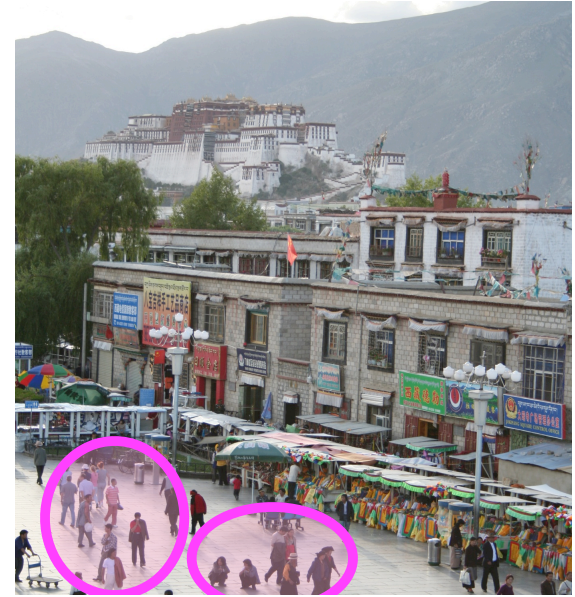


Identification: is that Potala Palace?




Object categorization

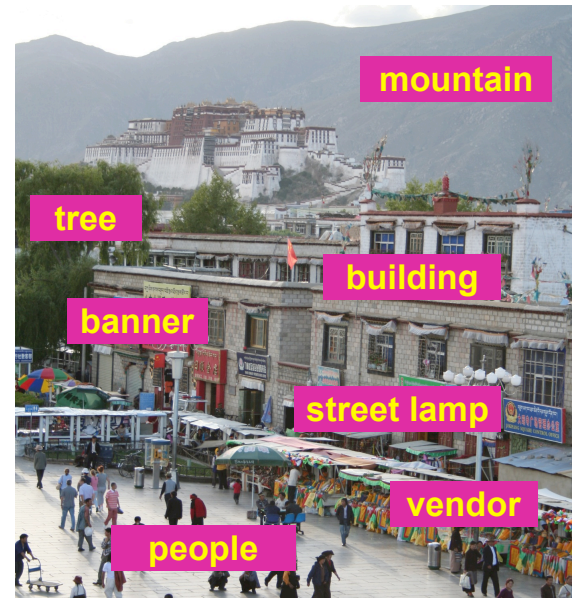

Scene and context categorization

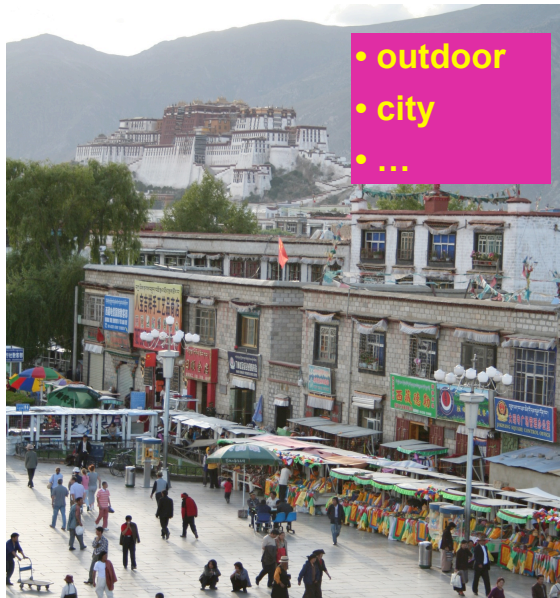


Applications: Computational photography

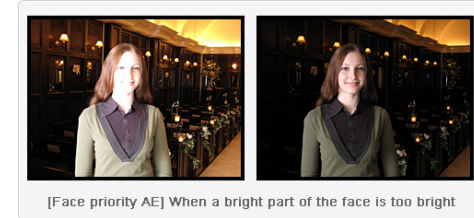


Applications: Assisted driving

Pedestrian and car detection



Lane detection



- Collision warning systems with adaptive cruise control,
- Lane departure warning systems,
- Rear object detection systems,

Applications: image search



Refine your image search with visual similarity

Similar Images allows you to search for images using pictures rather than words. Click the "Similar images" link under an image to find other images that look like it. Try a search of your own or click on an example below.

paris



[Similar images](#)



[Similar images](#)



[Similar images](#)



[Similar images](#)

Places

- [London](#)
- [New York](#)
- [Egypt](#)
- [Forbidden City](#)

Celebrities

- [Michael Jordan](#)
- [Angelina Jolie](#)
- [Halle Berry](#)
- [Seth Rogan](#)
- [Rihanna](#)

Art

- [impressionism](#)
- [Keith Haring](#)
- [cubism](#)
- [Salvador Dali](#)
- [pointillism](#)

Shopping

- [evening gown](#)
- [necklace](#)
- [shoes](#)



[Similar images](#)



[Similar images](#)



[Similar images](#)



[Similar images](#)

temple

Challenges: viewpoint variation



Michelangelo 1475-1564

Challenges: illumination variation



slide credit: S. Ullman

Challenges: occlusion




Magritte, 1957

Challenges: scale




Challenges: deformation

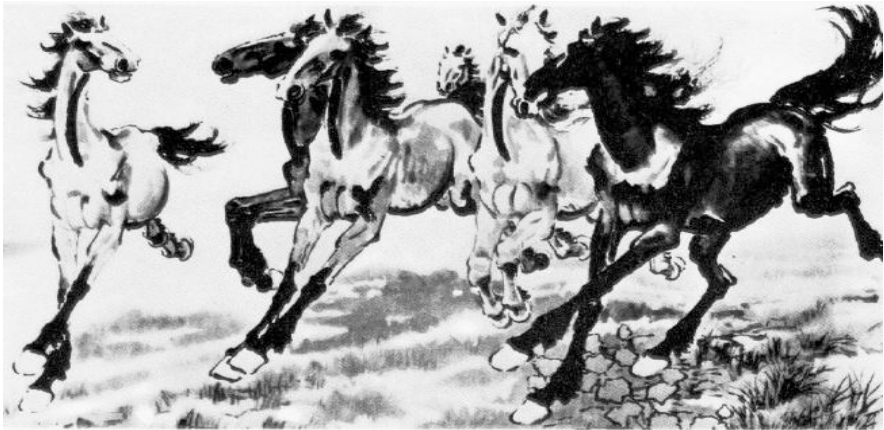

Xu, Beihong 1943

Challenges: background clutter

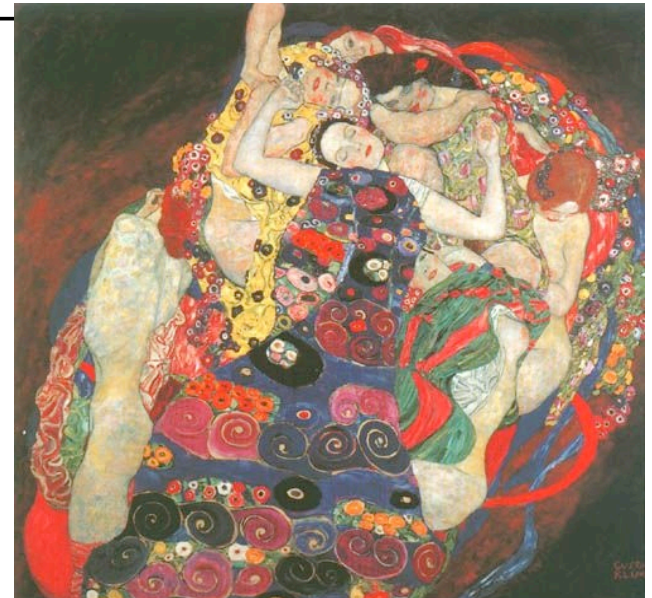

Klimt, 1913

Challenges: intra-class variation




Face detection



How to tell if a face is present?

One simple method: skin detection




Skin pixels have a distinctive range of colors

- Corresponds to region(s) in RGB color space
 - for visualization, only R and G components are shown above

Skin classifier

- A pixel $X = (R, G, B)$ is skin if it is in the skin region
- But how to find this region?

Skin detection




Learn the skin region from examples

- Manually label pixels in one or more “training images” as skin or not skin
- Plot the training data in RGB space
 - skin pixels shown in orange, non-skin pixels shown in blue
 - some skin pixels may be outside the region, non-skin pixels inside. Why?

Skin classifier

- Given $X = (R, G, B)$: how to determine if it is skin or not?

Skin classification techniques




Skin classifier: Given $X = (R, G, B)$: how to determine if it is skin or not?

- Nearest neighbor
 - find labeled pixel closest to X
- Find plane/curve that separates the two classes
 - popular approach: Support Vector Machines (SVM)
- Data modeling
 - fit a model (curve, surface, or volume) to each class
 - probabilistic version: fit a probability density/distribution model to each class

Probability


Basic probability

- X is a random variable
- $P(X)$ is the probability that X achieves a certain value

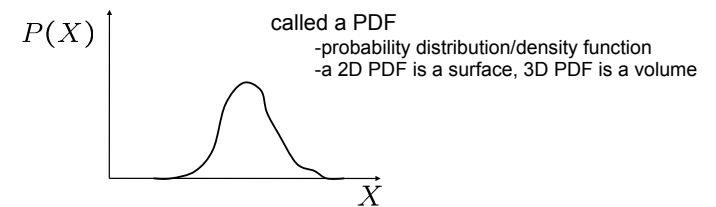

- $0 \leq P(X) \leq 1$
- $\int_{-\infty}^{\infty} P(X) dX = 1$ or $\sum P(X) = 1$
continuous X or discrete X
- Conditional probability: $P(X | Y)$
 - probability of X given that we already know Y

Probabilistic skin classification

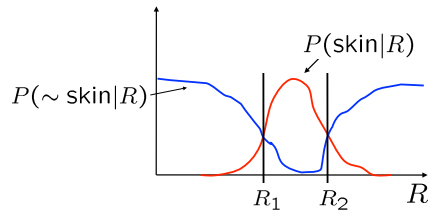

Now we can model uncertainty


- Each pixel has a probability of being skin or not skin
 - $P(\sim \text{skin}|R) = 1 - P(\text{skin}|R)$

Skin classifier

- Given $X = (R,G,B)$: how to determine if it is skin or not?
- Choose interpretation of highest probability
 - set X to be a skin pixel if and only if $R_1 < X \leq R_2$

Where do we get $P(\text{skin}|R)$ and $P(\sim \text{skin}|R)$?


Learning conditional PDF's

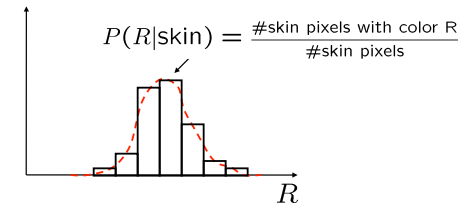

We can calculate $P(R | \text{skin})$ from a set of training images

- It is simply a histogram over the pixels in the training images
 - each bin R_i contains the proportion of skin pixels with color R_i


This doesn't work as well in higher-dimensional spaces. Why not?



Approach: fit parametric PDF functions

- common choice is rotated Gaussian
 - center $c = \bar{X}$
 - covariance $\sum_X (X - \bar{X})(X - \bar{X})^T$
 - » orientation, size defined by eigenvecs, eigenvals

Learning conditional PDF's

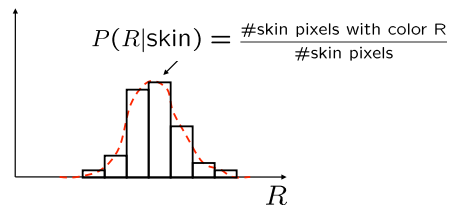

We can calculate $P(R | \text{skin})$ from a set of training images

- It is simply a histogram over the pixels in the training images
 - each bin R_i contains the proportion of skin pixels with color R_i

But this isn't quite what we want

- Why not? How to determine if a pixel is skin?
- We want $P(\text{skin} | R)$ not $P(R | \text{skin})$
- How can we get it?

Bayes rule

$$P(X|Y) = \frac{P(Y|X)P(X)}{P(Y)}$$


In terms of our problem:

$$P(\text{skin}|R) = \frac{\overset{\substack{\text{what we measure} \\ \text{(likelihood)}}}{P(R|\text{skin})} \overset{\substack{\text{domain knowledge} \\ \text{(prior)}}}{P(\text{skin})}}{\underset{\substack{\text{what we want} \\ \text{(posterior)}}}{P(R)} \underset{\substack{\text{normalization term} \\ P(R) = P(R|\text{skin})P(\text{skin}) + P(R|\sim \text{skin})P(\sim \text{skin})}}{P(R)}}$$

What could we use for the prior $P(\text{skin})$?

- Could use domain knowledge
 - $P(\text{skin})$ may be larger if we know the image contains a person
 - for a portrait, $P(\text{skin})$ may be higher for pixels in the center
- Could learn the prior from the training set. How?
 - $P(\text{skin})$ may be proportion of skin pixels in training set


Bayesian estimation

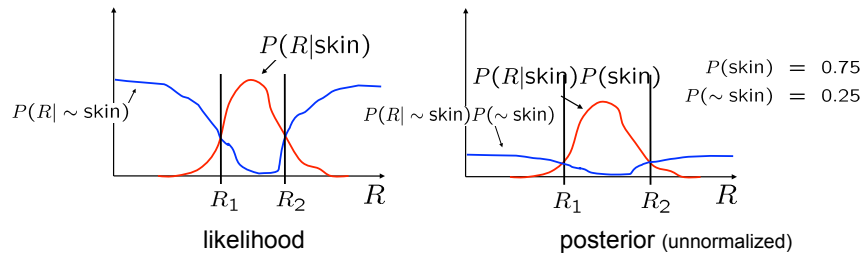

Bayesian estimation = minimize probability of misclassification

- Goal is to choose the label (skin or ~skin) that maximizes the posterior
 - this is called **Maximum A Posteriori (MAP) estimation**

Bayesian estimation

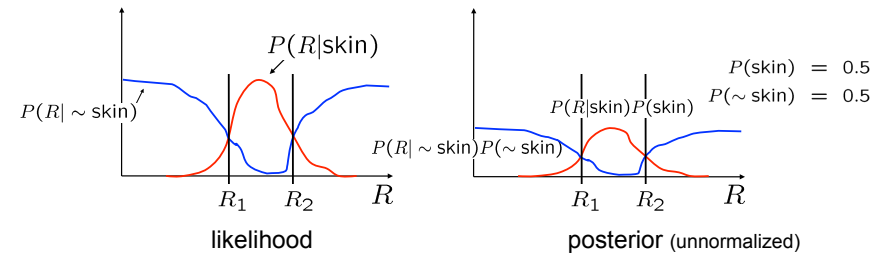

Bayesian estimation = minimize probability of misclassification

- Goal is to choose the label (skin or ~skin) that maximizes the posterior
 - this is called **Maximum A Posteriori (MAP) estimation**
- Suppose the prior is uniform: $P(\text{skin}) = P(\sim\text{skin}) = 0.5$
 - in this case $P(\text{skin}|R) = cP(R|\text{skin})$ $P(\sim\text{skin}|R) = cP(R|\sim\text{skin})$
 - maximizing the posterior is equivalent to maximizing the likelihood
 - » $P(\text{skin}|R) > P(\sim\text{skin}|R)$ if and only if $P(R|\text{skin}) > P(R|\sim\text{skin})$
 - this is called **Maximum Likelihood (ML) estimation**

Skin detection results


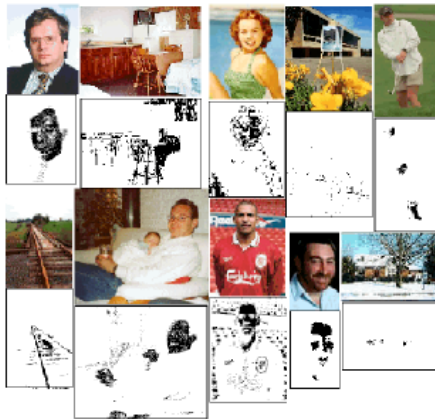


Figure 25.3. The figure shows a variety of images together with the output of the skin detector of Jones and Rehg applied to the image. Pixels marked black are skin pixels, and white are background. Notice that this process is relatively effective, and could certainly be used to focus attention on, say, faces and hands. Figure from "Statistical color models with application to skin detection," M.J. Jones and J. Rehg, Proc. Computer Vision and Pattern Recognition, 1999 © 1999, IEEE

General classification


This same procedure applies in more general circumstances

- More than two classes
- More than one dimension



Example: face detection


- Here, X is an image region
 - dimension = # pixels
 - each face can be thought of as a point in a high dimensional space

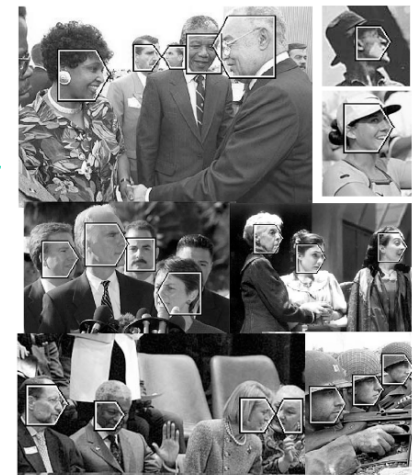

H. Schneiderman, T. Kanade. "A Statistical Method for 3D Object Detection Applied to Faces and Cars". IEEE Conference on Computer Vision and Pattern Recognition (CVPR 2000) <http://www-2.cs.cmu.edu/afs/cs.cmu.edu/user/hws/www/CVPR00.pdf>

H. Schneiderman and T.Kanade

Linear subspaces

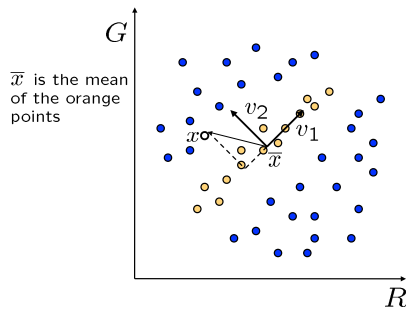

convert \mathbf{x} into $\mathbf{v}_1, \mathbf{v}_2$ coordinates
 $\mathbf{x} \rightarrow ((\mathbf{x} - \bar{\mathbf{x}}) \cdot \mathbf{v}_1, (\mathbf{x} - \bar{\mathbf{x}}) \cdot \mathbf{v}_2)$

What does the \mathbf{v}_2 coordinate measure?
 - distance to line
 - use it for classification—near 0 for orange pts

What does the \mathbf{v}_1 coordinate measure?
 - position along line
 - use it to specify which orange point it is


Classification can be expensive

- Big search prob (e.g., nearest neighbors) or store large PDF's

Suppose the data points are arranged as above

- Idea—fit a line, classifier measures distance to line


Dimensionality reduction

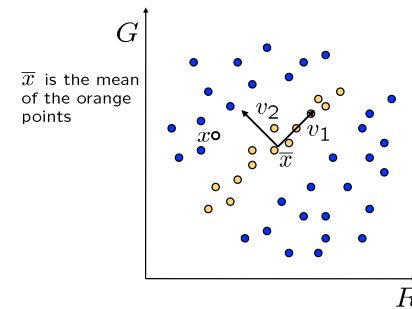

Dimensionality reduction

- We can represent the orange points with *only* their \mathbf{v}_1 coordinates
 - since \mathbf{v}_2 coordinates are all essentially 0
- This makes it much cheaper to store and compare points
- A bigger deal for higher dimensional problems

Linear subspaces

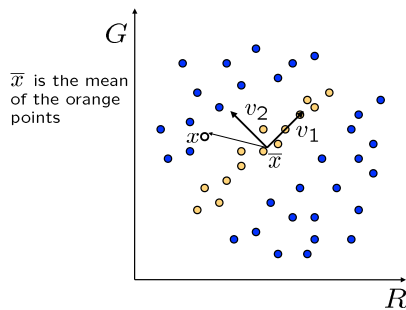

Consider the variation along direction \mathbf{v} among all of the orange points:

$$var(\mathbf{v}) = \sum_{\text{orange point } \mathbf{x}} \|(\mathbf{x} - \bar{\mathbf{x}})^T \cdot \mathbf{v}\|^2$$

What unit vector \mathbf{v} minimizes var ?
 $\mathbf{v}_2 = \min_{\mathbf{v}} \{var(\mathbf{v})\}$

What unit vector \mathbf{v} maximizes var ?
 $\mathbf{v}_1 = \max_{\mathbf{v}} \{var(\mathbf{v})\}$

$$\begin{aligned} var(\mathbf{v}) &= \sum_{\mathbf{x}} \|(\mathbf{x} - \bar{\mathbf{x}})^T \cdot \mathbf{v}\|^2 \\ &= \sum_{\mathbf{x}} \mathbf{v}^T (\mathbf{x} - \bar{\mathbf{x}}) (\mathbf{x} - \bar{\mathbf{x}})^T \mathbf{v} \\ &= \mathbf{v}^T \left[\sum_{\mathbf{x}} (\mathbf{x} - \bar{\mathbf{x}}) (\mathbf{x} - \bar{\mathbf{x}})^T \right] \mathbf{v} \\ &= \mathbf{v}^T \mathbf{A} \mathbf{v} \text{ where } \mathbf{A} = \sum_{\mathbf{x}} (\mathbf{x} - \bar{\mathbf{x}}) (\mathbf{x} - \bar{\mathbf{x}})^T \end{aligned}$$

Solution: \mathbf{v}_1 is eigenvector of \mathbf{A} with *largest* eigenvalue
 \mathbf{v}_2 is eigenvector of \mathbf{A} with *smallest* eigenvalue

Principal component analysis (PCA)


Suppose each data point is N-dimensional

- Same procedure applies:

$$\begin{aligned} var(\mathbf{v}) &= \sum_{\mathbf{x}} \|(\mathbf{x} - \bar{\mathbf{x}})^T \cdot \mathbf{v}\|^2 \\ &= \mathbf{v}^T \mathbf{A} \mathbf{v} \text{ where } \mathbf{A} = \sum_{\mathbf{x}} (\mathbf{x} - \bar{\mathbf{x}}) (\mathbf{x} - \bar{\mathbf{x}})^T \end{aligned}$$

- The eigenvectors of \mathbf{A} define a new coordinate system
 - eigenvector with largest eigenvalue captures the most variation among training vectors \mathbf{x}
 - eigenvector with smallest eigenvalue has least variation
- We can compress the data by only using the top few eigenvectors
 - corresponds to choosing a “linear subspace”
 - » represent points on a line, plane, or “hyper-plane”
 - these eigenvectors are known as the **principal components**


The space of faces

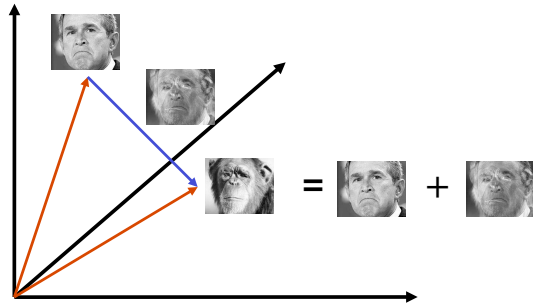

An image is a point in a high dimensional space

- An $N \times M$ image is a point in \mathbb{R}^{NM}
- We can define vectors in this space as we did in the 2D case

Dimensionality reduction

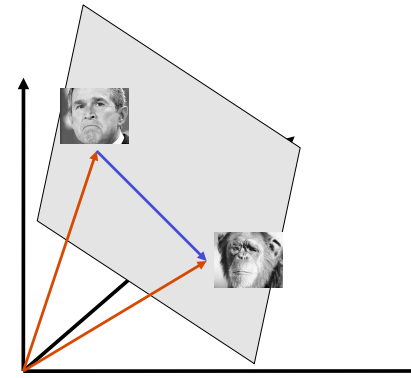


The set of faces is a “subspace” of the set of images

- Suppose it is K dimensional
- We can find the best subspace using PCA
- This is like fitting a “hyper-plane” to the set of faces
 - spanned by vectors $\mathbf{v}_1, \mathbf{v}_2, \dots, \mathbf{v}_K$
 - any face $\mathbf{x} \approx \bar{\mathbf{x}} + a_1\mathbf{v}_1 + a_2\mathbf{v}_2 + \dots + a_k\mathbf{v}_k$

Eigenfaces

PCA extracts the eigenvectors of \mathbf{A}

- Gives a set of vectors $\mathbf{v}_1, \mathbf{v}_2, \mathbf{v}_3, \dots$
- Each one of these vectors is a direction in face space
 - what do these look like?

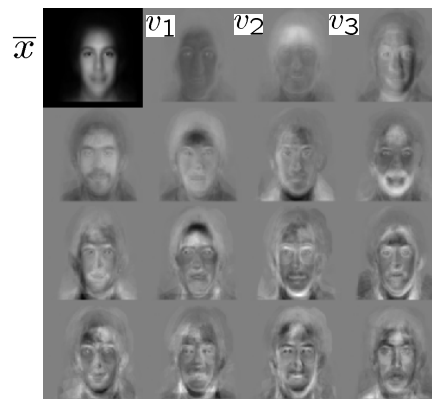


Projecting onto the eigenfaces

The eigenfaces $\mathbf{v}_1, \dots, \mathbf{v}_K$ span the space of faces

- A face is converted to eigenface coordinates by

$$\mathbf{x} \rightarrow \left(\underbrace{(\mathbf{x} - \bar{\mathbf{x}}) \cdot \mathbf{v}_1}_{a_1}, \underbrace{(\mathbf{x} - \bar{\mathbf{x}}) \cdot \mathbf{v}_2}_{a_2}, \dots, \underbrace{(\mathbf{x} - \bar{\mathbf{x}}) \cdot \mathbf{v}_K}_{a_K} \right)$$

$$\mathbf{x} \approx \bar{\mathbf{x}} + a_1\mathbf{v}_1 + a_2\mathbf{v}_2 + \dots + a_K\mathbf{v}_K$$

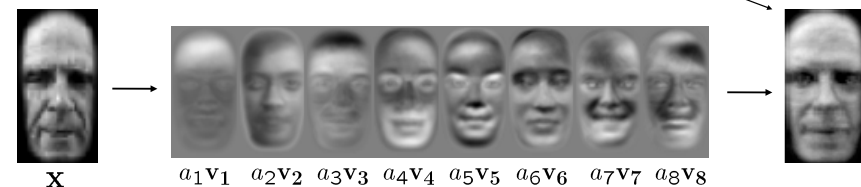

Recognition with eigenfaces

Algorithm

1. Process the image database (set of images with labels)
 - Run PCA—compute eigenfaces
 - Calculate the K coefficients for each image
2. Given a new image (to be recognized) \mathbf{x} , calculate K coefficients


$$\mathbf{x} \rightarrow (a_1, a_2, \dots, a_K)$$

3. Detect if \mathbf{x} is a face

$$\|\mathbf{x} - (\bar{\mathbf{x}} + a_1\mathbf{v}_1 + a_2\mathbf{v}_2 + \dots + a_K\mathbf{v}_K)\| < \text{threshold}$$

4. If it is a face, who is it?
 - Find closest labeled face in database
 - nearest-neighbor in K-dimensional space

Choosing the dimension K

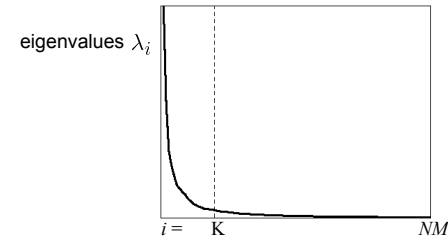

How many eigenfaces to use?

Look at the decay of the eigenvalues

- the eigenvalue tells you the amount of variance “in the direction” of that eigenface
- ignore eigenfaces with low variance

Object recognition

This is just the tip of the iceberg

- Better features:
 - edges (e.g., SIFT)
 - motion
 - depth/3D info
 - ...
- Better classifiers:
 - e.g., support vector machines (SVN)
- Speed (e.g., real-time face detection)
- Scale
 - e.g., Internet image search

Recognition is a very active research area right now