

Texture Mapping

Brian Curless
CSE 457
Spring 2016

1

Reading

Required

- ♦ Angel, 7.4-7.10

Recommended

- ♦ Paul S. Heckbert. Survey of texture mapping. **IEEE Computer Graphics and Applications** 6(11): 56–67, November 1986.

Optional

- ♦ Woo, Neider, & Davis, Chapter 9
- ♦ James F. Blinn and Martin E. Newell. Texture and reflection in computer generated images. **Communications of the ACM** 19(10): 542–547, October 1976.

2

Texture mapping



Texture mapping (Woo et al., fig. 9-1)

Texture mapping allows you to take a simple polygon and give it the appearance of something much more complex.


- ♦ Due to Ed Catmull, PhD thesis, 1974
- ♦ Refined by Blinn & Newell, 1976

A texture can modulate just about any parameter – diffuse color, specular color, specular exponent, ...

3

Implementing texture mapping

A texture lives in its own abstract image coordinates parameterized by (u, v) in the range $([0..1], [0..1])$:

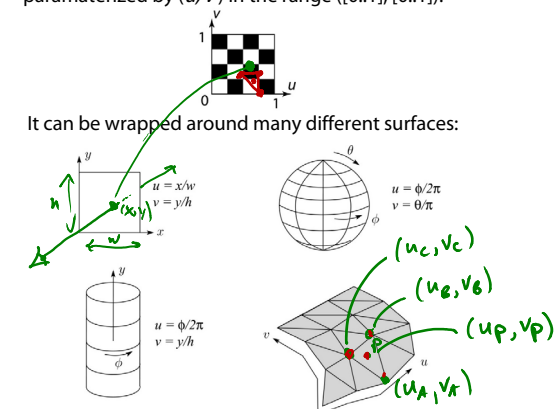


It can be wrapped around many different surfaces:

With a ray caster, we can do the sphere and cylinder mappings directly (as we will see later). For graphics hardware, everything gets converted to a triangle mesh with associated (u, v) coordinates.

Note: if the surface moves/deforms, the texture goes with it.

4

Texture coordinates on a surface of revolution

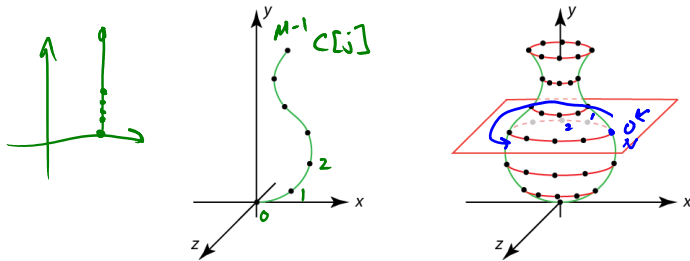

Recall that for a surface of revolution, we have:

Profile curve: $C[j]$ where $j \in [0..M-1]$

Rotation angles: $\theta[i] = 2\pi i/N$ where $i \in [0..N]$


The simplest assignment of texture coordinates would be:

$$u = \frac{i}{N} \quad v = \frac{j}{M-1}$$

Note that you should include the rotation angles for $i=0$ and $i=N$, even though they produce the same points (after rotating by 0 and 2π). Why do this??

5

Texture coordinates on a surface of revolution

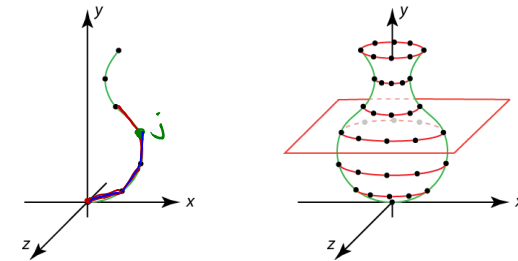

If we wrap an image around this surface of revolution, what artifacts would we expect to see?

We can reduce distortion in v . Define:

$$d[j] = \begin{cases} \|C[j] - C[j-1]\|, & \text{if } j \neq 0 \\ 0, & \text{if } j = 0 \end{cases}$$

and set v to fractional distance along the curve:

$$v = \frac{\sum_{k=0}^{j-1} d[k]}{\sum_{k=0}^{M-1} d[k]}$$

You must do this for v for the assignment!

6


Mapping to texture image coords

The texture is usually stored as an image. Thus, we need to convert from abstract texture coordinate:

(u, v) in the range $([0..1], [0..1])$

to texture image coordinates:

(u_{tex}, v_{tex}) in the range $([0..w_{tex}], [0..h_{tex}])$

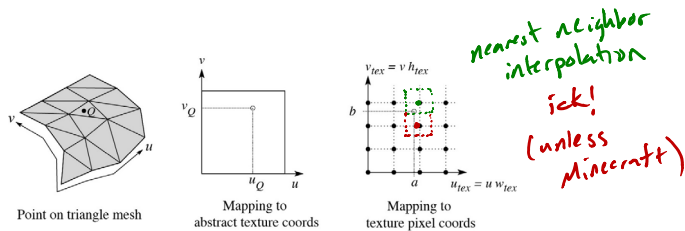


Q: What do you do when the texture sample you need lands between texture pixels?

7

Texture resampling

We need to resample the texture:

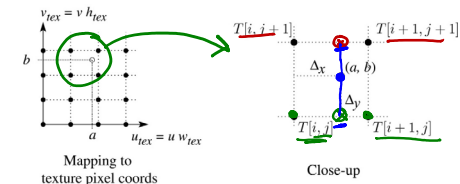

Thus, we seek to solve for: $T(a, b) = T(i + \Delta_x, j + \Delta_y)$

A common choice is **bilinear interpolation**:

$$T(i + \Delta_x, j) = \frac{(1 - \Delta_x)}{1} T[i, j] + \frac{\Delta_x}{1} T[i + 1, j]$$

$$T(i + \Delta_x, j + 1) = \frac{(1 - \Delta_x)}{1} T[i, j + 1] + \frac{\Delta_x}{1} T[i + 1, j + 1]$$

$$\begin{aligned} T(i + \Delta_x, j + \Delta_y) &= \frac{(1 - \Delta_y)}{1} T(i + \Delta_x, j) + \frac{\Delta_y}{1} T(i + \Delta_x, j + 1) \\ &= \frac{(1 - \Delta_x)(1 - \Delta_y)}{1} T[i, j] + \frac{\Delta_x(1 - \Delta_y)}{1} T[i + 1, j] + \\ &\quad \frac{(1 - \Delta_x)\Delta_y}{1} T[i, j + 1] + \frac{\Delta_x\Delta_y}{1} T[i + 1, j + 1] \end{aligned}$$


8

Texture mapping and rasterization

Texture-mapping can also be handled in rasterization algorithms.

Method:

- Scan conversion is done in screen space, as usual
- Each pixel is colored according to the texture
- Texture coordinates are found by Gouraud-style interpolation

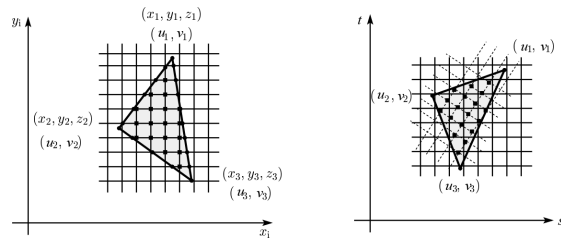


Note: Mapping is more complicated to handle perspective correctly.

9

Displacement mapping

Textures can be used for more than just color.

In **displacement mapping**, a texture is used to perturb the surface geometry itself. Here's the idea in 2D:

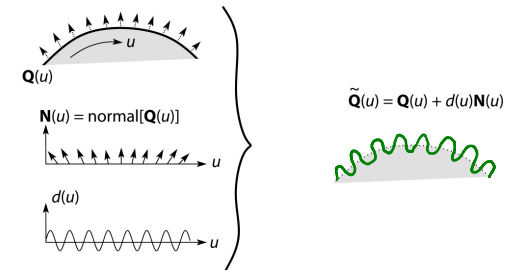

- These displacements "animate" with the surface
- In 3D, you would of course have (u, v) parameters instead of just u .

Suppose Q is a simple surface, like a cube. Will it take more work to render the modified surface \tilde{Q} ? Y


10

Bump mapping

In **bump mapping**, a texture is used to perturb the normal:

- Use the original, simpler geometry, $Q(u)$, for hidden surfaces
- Use the normal from the displacement map for shading:

$$\tilde{N} = \text{normal}[\tilde{Q}(u)]$$




What artifacts in the images would reveal that bump mapping is fake?

*silhouettes will be smooth
shadows
missing self-occlusion (shadowing)*


11

Displacement vs. bump mapping

Input texture



Rendered as displacement map over a rectangular surface

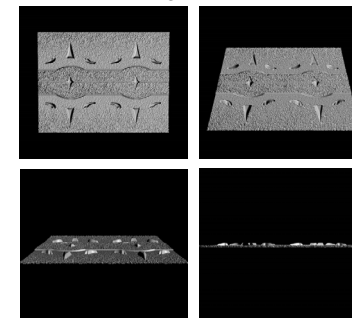

12

Displacement vs. bump mapping (cont'd)



Original rendering

Rendering with bump map wrapped around a cylinder


Bump map and rendering by Wyvern Aldinger

13

Solid textures

Q: What kinds of artifacts might you see from using a marble veneer instead of real marble?

seam "at the back"
distortion



One solution is to use **solid textures**:

- ♦ Use model-space coordinates to index into a 3D texture
- ♦ Like "carving" the object from the material

One difficulty of solid texturing is coming up with the textures.

14

Solid textures (cont'd)

Here's an example for a vase cut from a solid marble texture:



Solid marble texture by Ken Perlin, (Foley, IV-21)


15

Solid textures (cont'd)

$$\text{in}(x, y, z) = \text{stripes}(x)$$

$$\text{shift}(x, y, z) = K \cdot \text{noise}(x, y, z)$$

$$\text{out}(x, y, z) = \text{stripes}(x + \text{shift}(x, y, z))$$

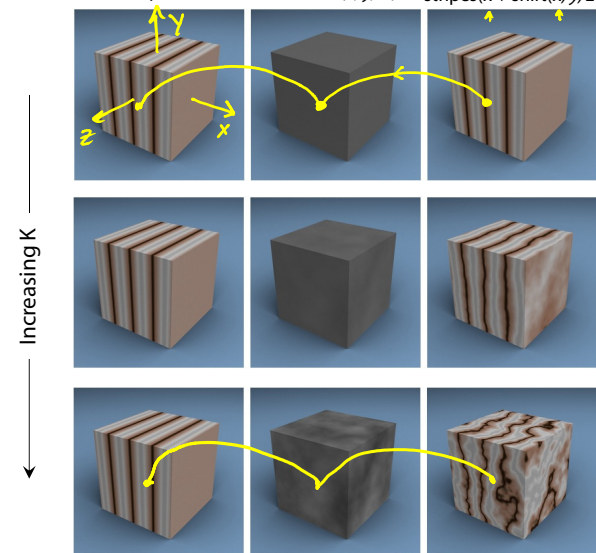

16

Environment mapping



In **environment mapping** (also known as **reflection mapping**), a texture is used to model an object's environment:

- ♦ Rays are bounced off objects into environment
- ♦ Color of the environment used to determine color of the illumination
- ♦ Environment mapping works well when there is just a single object – or in conjunction with ray tracing

This can be readily implemented (without interreflection) in graphics hardware using a fragment shader, where the texture is stored in a “cube map” instead of a sphere.

With a ray tracer, the concept is easily extended to handle refraction as well as reflection (and interreflection).

Summary

What to take home from this lecture:

1. The meaning of the boldfaced terms.
2. Familiarity with the various kinds of texture mapping, including their strengths and limitations.