

Basic Wireshark Intro

Debug Project 1 by capturing and analyzing packets



Administrivia

- Assignment 1 due on Sunday (10/17)
 - Needs materials discussed in the lecture
- Project 1 due on 10/27
 - Today: a short section followed by additional office hours

Wireshark

Download: <https://www.wireshark.org/download.html>

- Also available in most Linux package managers

User's Guide: https://www.wireshark.org/docs/wsug_html_chunked/

What is Wireshark

It's a tool that captures and analyzes packets sent over the network


- Very commonly used in Network Forensics
- Captures all packets through a network interface (ethernet, WiFi)
 - Can capture packets on all network interfaces at the same time
- Analyzes packets and decodes raw data if the protocol is recognized
- Filters packets based on user's input

Wireshark Interface

Start Packet Capture

Interface Selection

Display filter for captured packets

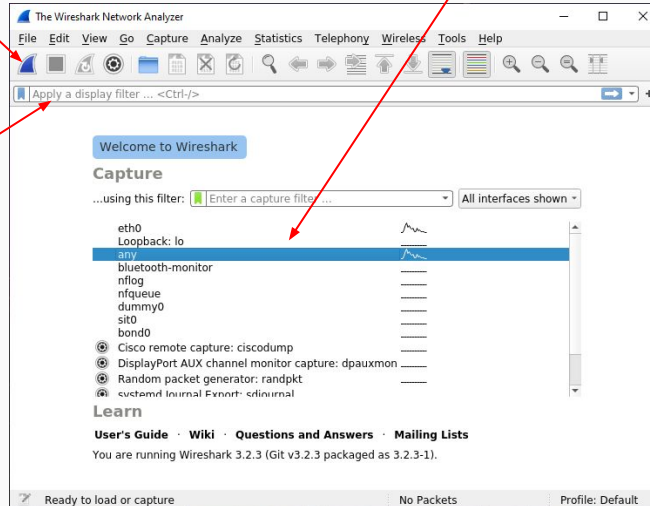

Debugging P1 with Wireshark

Lots of packets are being sent while your computer is connected to a network.

- Apply a filter to show only packets to/from attu's IP address
 - How to find the IP address of attu?
 - Run `ifconfig` on attu (through SSH)
 - `nslookup attu2.cs.washington.edu` (from any computer)
 - `traceroute` will print out the IP address as well
 - `ip.addr == 128.208.1.138`
- What if you are ssh'd into attu?
 - You will then be capturing packets from SSH as well
- Narrow down further by filtering on the port number
 - `udp.port == 12235` (or whatever port number you want to capture on)
 - `tcp.port == portNumber`
- Can apply boolean logic to combine filters: `==`, `&&`, `||`, `!`
 - `ip.addr == 128.208.1.138 && udp.port == 12235`
 - Will only show packets to/from attu2 on udp port 12235

Wireshark Captured Packets Interface

Captured packets

Hexadecimal data contained in the UDP packet

ASCII Decoding of data

Copy data value as hexadecimal string

The screenshot displays the Wireshark interface with a filter set to `ip.addr == 128.208.1.138 && udp.port == 12235`. The packet list shows two captured packets:

No.	Time	Source	Destination	Protocol	Length	Info
776	8.752599900	172.22.203.88	128.208.1.138	UDP	68	58726
777	8.818393900	128.208.1.138	172.22.203.88	UDP	72	12235

The details pane for the selected packet (No. 776) shows the following structure:

- Frame 776: 68 bytes on wire (544 bits), 68 bytes captured (544 bits) on interface any, id 0
- Linux cooked capture
- Internet Protocol Version 4, Src: 172.22.203.88, Dst: 128.208.1.138
- User Datagram Protocol, Src Port: 58726, Dst Port: 12235
- Data (24 bytes)

The data field is expanded to show hexadecimal and ASCII representations:

```
0000 00 04 00 01 00 06 00 15 5d 59 7c e1 ef ff 08 00 .....|Y|.....
0010 45 00 00 34 a9 al 80 00 40 11 97 4e ac 16 cb 58 E:4:3|@-N--X
0020 80 d0 01 8a e5 66 2f cb 00 20 f9 fa 00 00 0c .....f|.....
0030 00 00 00 00 00 01 03 cb 68 65 6c 6c 6f 20 77 6f .....hello wo
0040 72 6c 64 00 .....rld.
```

A context menu is open over the data field, with the 'Copy' option selected. The 'Copy' submenu is also visible, showing options like 'Copy Packet Bytes...', 'Export Packet Bytes...', 'Wiki Protocol Page', 'Filter Field Reference', 'Protocol Preferences', 'Decode As...', 'Go to Linked Packet', and 'Show Linked Packet in New Window'. The 'Copy' option is highlighted, and the 'Copy' submenu is open, showing options like 'All Visible Items', 'All Visible Selected Tree Items', 'Description', 'Field Name', 'Value', 'As Filter', 'Copy Bytes as Hex + ASCII Dump', '...as Hex Dump', '...as Printable Text', '...as a Hex Stream', '...as Raw Binary', and '...as Escaped String'.

Debugging using Hex Dumps

In the case of project 1, Wireshark will only recognize/analyze the packet to the UDP or TCP headers

The data structures in p1 aren't recognized by Wireshark

- You will only be able to view the data you sent in hexadecimal or binary format
 - It will attempt to decode ASCII data - so you should see 'hello world' at the end of the first packet
- Viewing the integer values of data will require manually decoding/converting from bytes
- Copy the hexadecimal string of data from wireshark
- Python console can be handy for decoding - or use any other tool you like
 - `pbytes = bytes.fromhex('0000000c00000000000103cb68656c6c6f20776f7226c6400')`
 - Be mindful of endianness - wireshark displays data in Big Endian
 - Make sure the endianness of what you copied matches what is displayed in Wireshark
 - You can now take slices from pbytes and convert them to the appropriate types
 - `header_payload_len = int.from_bytes(pbytes[0:4], byteorder='big')`
 - `header_student_id = int.from_bytes(pbytes[10:12], byteorder='big')`

To be continued...

Working with the hexadecimal data can be very tedious.

This isn't a common use-case for Wireshark, but can be useful if all other debugging fails.

We will run through a complete demo of Wireshark in section later in the quarter (or not?)

The rest of today's section will be additional office hours for Project 1.