

# FIRST-ORDER LOGIC

## CHAPTER 7

Chapter 7 1

### First-order logic

Whereas propositional logic assumes world contains *facts*,  
first-order logic (like natural language) assumes the world contains

- **Objects:** people, houses, numbers, theories, Ronald McDonald, colors, baseball games, wars, centuries ...
- **Relations:** red, round, bogus, prime, multistoried ..., brother of, bigger than, inside, part of, has color, occurred after, owns, comes between, ...
- **Functions:** father of, best friend, third inning of, one more than, beginning of ...

Chapter 7 4

### Outline

- ◇ Why FOL?
- ◇ Syntax and semantics of FOL
- ◇ Fun with sentences
- ◇ Wumpus world in FOL

Chapter 7 2

### Logics in general

Language	Ontological Commitment	Epistemological Commitment
Propositional logic	facts	true/false/unknown
First-order logic	facts, objects, relations	true/false/unknown
Temporal logic	facts, objects, relations, times	true/false/unknown
Probability theory	facts	degree of belief $\in [0, 1]$
Fuzzy logic	degree of truth $\in [0, 1]$	known interval value

Chapter 7 5

### Pros and cons of propositional logic

- ☺ Propositional logic is *declarative*: pieces of syntax correspond to facts
- ☺ Propositional logic allows partial/disjunctive/negated information (unlike most data structures and databases)
- ☺ Propositional logic is *compositional*:  
meaning of  $B_{1,1} \wedge P_{1,2}$  is derived from meaning of  $B_{1,1}$  and of  $P_{1,2}$
- ☺ Meaning in propositional logic is *context-independent* (unlike natural language, where meaning depends on context)
- ☹ Propositional logic has very limited expressive power (unlike natural language)  
E.g., cannot say "pits cause breezes in adjacent squares" except by writing one sentence for each square

Chapter 7 3

### Syntax of FOL: Basic elements

Constants *KingJohn, 2, UCB, ...*  
 Predicates *Brother, >, ...*  
 Functions *Sqrt, LeftLegOf, ...*  
 Variables *x, y, a, b, ...*  
 Connectives  $\wedge \vee \neg \Rightarrow \Leftrightarrow$   
 Equality  $=$   
 Quantifiers  $\forall \exists$

Chapter 7 6


## Atomic sentences

Atomic sentence =  $predicate(term_1, \dots, term_n)$   
or  $term_1 = term_2$

Term =  $function(term_1, \dots, term_n)$   
or *constant or variable*

E.g.,  $Brother(KingJohn, RichardTheLionheart)$   
 $> (Length(LeftLegOf(Richard)), Length(LeftLegOf(KingJohn)))$

## Models for FOL: Example

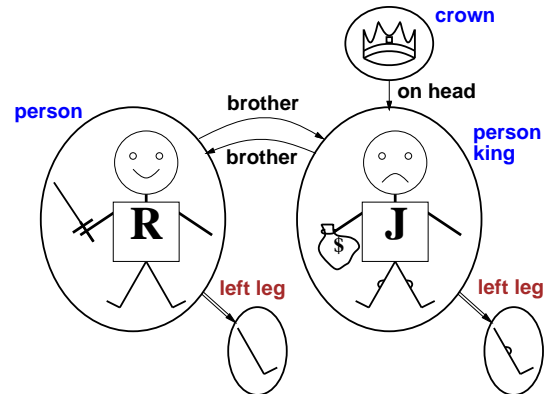

## Complex sentences

Complex sentences are made from atomic sentences using connectives

$\neg S$ ,  $S_1 \wedge S_2$ ,  $S_1 \vee S_2$ ,  $S_1 \Rightarrow S_2$ ,  $S_1 \Leftrightarrow S_2$

E.g.  $Sibling(KingJohn, Richard) \Rightarrow Sibling(Richard, KingJohn)$   
 $> (1, 2) \vee \leq (1, 2)$   
 $> (1, 2) \wedge \neg > (1, 2)$

## Models for FOL: Lots!

We *can* enumerate the models for a given KB vocabulary:

For each number of domain elements  $n$  from 1 to  $\infty$

For each  $k$ -ary predicate  $P_k$  in the vocabulary

For each possible  $k$ -ary relation on  $n$  objects

For each constant symbol  $C$  in the vocabulary

For each choice of referent for  $C$  from  $n$  objects ...

Computing entailment by enumerating models is not going to be easy!

## Truth in first-order logic

Sentences are true with respect to a **model** and an **interpretation**

Model contains  $\geq 1$  objects (**domain elements**) and relations among them

Interpretation specifies referents for

**constant symbols**  $\rightarrow$  objects

**predicate symbols**  $\rightarrow$  relations

**function symbols**  $\rightarrow$  functional relations

An atomic sentence  $predicate(term_1, \dots, term_n)$  is true  
iff the **objects** referred to by  $term_1, \dots, term_n$   
are in the **relation** referred to by  $predicate$

## Universal quantification

$\forall \langle variables \rangle \langle sentence \rangle$

Everyone at Berkeley is smart:

$\forall x At(x, Berkeley) \Rightarrow Smart(x)$

$\forall x P$  is true in a model  $m$  iff  $P$  with  $x$  being  
each possible object in the model

Roughly speaking, equivalent to the **conjunction of instantiations** of  $P$

$At(KingJohn, Berkeley) \Rightarrow Smart(KingJohn)$   
 $\wedge At(Richard, Berkeley) \Rightarrow Smart(Richard)$   
 $\wedge At(Berkeley, Berkeley) \Rightarrow Smart(Berkeley)$   
 $\wedge \dots$

## A common mistake to avoid

Typically,  $\Rightarrow$  is the main connective with  $\forall$

Common mistake: using  $\wedge$  as the main connective with  $\forall$ :

$$\forall x \text{ At}(x, \text{Berkeley}) \wedge \text{Smart}(x)$$

means "Everyone is at Berkeley and everyone is smart"

## Properties of quantifiers

$\forall x \forall y$  is the same as  $\forall y \forall x$  (why??)

$\exists x \exists y$  is the same as  $\exists y \exists x$  (why??)

$\exists x \forall y$  is **not** the same as  $\forall y \exists x$

$$\exists x \forall y \text{ Loves}(x, y)$$

"There is a person who loves everyone in the world"

$$\forall y \exists x \text{ Loves}(x, y)$$

"Everyone in the world is loved by at least one person"

**Quantifier duality:** each can be expressed using the other

$$\forall x \text{ Likes}(x, \text{IceCream}) \quad \neg \exists x \neg \text{Likes}(x, \text{IceCream})$$

$$\exists x \text{ Likes}(x, \text{Broccoli}) \quad \neg \forall x \neg \text{Likes}(x, \text{Broccoli})$$

## Existential quantification

$\exists$   $\langle$ variables $\rangle$   $\langle$ sentence $\rangle$

Someone at Stanford is smart:

$$\exists x \text{ At}(x, \text{Stanford}) \wedge \text{Smart}(x)$$

$\exists x P$  is true in a model  $m$  iff  $P$  with  $x$  being each possible object in the model

Roughly speaking, equivalent to the disjunction of instantiations of  $P$

$$\text{At}(\text{KingJohn}, \text{Stanford}) \wedge \text{Smart}(\text{KingJohn})$$

$$\vee \text{At}(\text{Richard}, \text{Stanford}) \wedge \text{Smart}(\text{Richard})$$

$$\vee \text{At}(\text{Stanford}, \text{Stanford}) \wedge \text{Smart}(\text{Stanford})$$

$$\vee \dots$$

## Fun with sentences

Brothers are siblings

## Another common mistake to avoid

Typically,  $\wedge$  is the main connective with  $\exists$

Common mistake: using  $\Rightarrow$  as the main connective with  $\exists$ :

$$\exists x \text{ At}(x, \text{Stanford}) \Rightarrow \text{Smart}(x)$$

is true if there is anyone who is not at Stanford!

## Fun with sentences

Brothers are siblings

$$\forall x, y \text{ Brother}(x, y) \Rightarrow \text{Sibling}(x, y).$$

"Sibling" is symmetric

## Fun with sentences

Brothers are siblings

$$\forall x, y \text{ Brother}(x, y) \Rightarrow \text{Sibling}(x, y).$$

“Sibling” is symmetric

$$\forall x, y \text{ Sibling}(x, y) \Leftrightarrow \text{Sibling}(y, x).$$

One’s mother is one’s female parent

Chapter 7 19

## Equality

$term_1 = term_2$  is true under a given interpretation  
if and only if  $term_1$  and  $term_2$  refer to the same object

E.g.,  $1 = 2$  and  $\forall x \times(\text{Sqrt}(x), \text{Sqrt}(x)) = x$  are satisfiable  
 $2 = 2$  is valid

E.g., definition of (full) *Sibling* in terms of *Parent*:

$$\forall x, y \text{ Sibling}(x, y) \Leftrightarrow [\neg(x=y) \wedge \exists m, f \neg(m=f) \wedge \text{Parent}(m, x) \wedge \text{Parent}(f, x) \wedge \text{Parent}(m, y) \wedge \text{Parent}(f, y)]$$

Chapter 7 22

## Fun with sentences

Brothers are siblings

$$\forall x, y \text{ Brother}(x, y) \Rightarrow \text{Sibling}(x, y).$$

“Sibling” is symmetric

$$\forall x, y \text{ Sibling}(x, y) \Leftrightarrow \text{Sibling}(y, x).$$

One’s mother is one’s female parent

$$\forall x, y \text{ Mother}(x, y) \Leftrightarrow (\text{Female}(x) \wedge \text{Parent}(x, y)).$$

A first cousin is a child of a parent’s sibling

Chapter 7 20

## Interacting with FOL KBs

Suppose a wumpus-world agent is using an FOL KB  
and perceives a smell and a breeze (but no glitter) at  $t = 5$ :

$\text{Tell}(KB, \text{Percept}([\text{Smell}, \text{Breeze}, \text{None}], 5))$

$\text{Ask}(KB, \exists a \text{ Action}(a, 5))$

i.e., does the KB entail any particular actions at  $t = 5$ ?

Answer: *Yes*,  $\{a/\text{Shoot}\}$  ← substitution (binding list)

Given a sentence  $S$  and a substitution  $\sigma$ ,

$S\sigma$  denotes the result of plugging  $\sigma$  into  $S$ ; e.g.,

$S = \text{Smarter}(x, y)$

$\sigma = \{x/\text{Hillary}, y/\text{Bill}\}$

$S\sigma = \text{Smarter}(\text{Hillary}, \text{Bill})$

$\text{Ask}(KB, S)$  returns some/all  $\sigma$  such that  $KB \models S\sigma$

Chapter 7 23

## Fun with sentences

Brothers are siblings

$$\forall x, y \text{ Brother}(x, y) \Rightarrow \text{Sibling}(x, y).$$

“Sibling” is symmetric

$$\forall x, y \text{ Sibling}(x, y) \Leftrightarrow \text{Sibling}(y, x).$$

One’s mother is one’s female parent

$$\forall x, y \text{ Mother}(x, y) \Leftrightarrow (\text{Female}(x) \wedge \text{Parent}(x, y)).$$

A first cousin is a child of a parent’s sibling

$$\forall x, y \text{ FirstCousin}(x, y) \Leftrightarrow \exists p, ps \text{ Parent}(p, x) \wedge \text{Sibling}(ps, p) \wedge \text{Parent}(ps, y)$$

Chapter 7 21

## Knowledge base for the wumpus world

“Perception”

$\forall b, g, t \text{ Percept}([\text{Smell}, b, g], t) \Rightarrow \text{Smelt}(t)$

$\forall s, b, t \text{ Percept}([s, b, \text{Glitter}], t) \Rightarrow \text{AtGold}(t)$

Reflex:  $\forall t \text{ AtGold}(t) \Rightarrow \text{Action}(\text{Grab}, t)$

Reflex with internal state: do we have the gold already?

$\forall t \text{ AtGold}(t) \wedge \neg \text{Holding}(\text{Gold}, t) \Rightarrow \text{Action}(\text{Grab}, t)$

$\text{Holding}(\text{Gold}, t)$  cannot be observed

⇒ keeping track of change is essential

Chapter 7 24

## Deducing hidden properties

Properties of locations:

$$\forall x, t \text{ At}(\text{Agent}, x, t) \wedge \text{Smelt}(t) \Rightarrow \text{Smelly}(x)$$

$$\forall x, t \text{ At}(\text{Agent}, x, t) \wedge \text{Breeze}(t) \Rightarrow \text{Breezy}(x)$$

Squares are breezy near a pit:

**Diagnostic rule**—infer cause from effect

$$\forall y \text{ Breezy}(y) \Rightarrow \exists x \text{ Pit}(x) \wedge \text{Adjacent}(x, y)$$

**Causal rule**—infer effect from cause

$$\forall x, y \text{ Pit}(x) \wedge \text{Adjacent}(x, y) \Rightarrow \text{Breezy}(y)$$

Neither of these is complete—e.g., the causal rule doesn't say whether squares far away from pits can be breezy

**Definition** for the *Breezy* predicate:

$$\forall y \text{ Breezy}(y) \Leftrightarrow [\exists x \text{ Pit}(x) \wedge \text{Adjacent}(x, y)]$$

## Describing actions II

**Successor-state axioms** solve the representational frame problem

Each axiom is “about” a **predicate** (not an action per se):

$$\begin{aligned} \text{P true afterwards} &\Leftrightarrow [\text{an action made P true} \\ &\vee \text{ P true already and no action made P false}] \end{aligned}$$

For holding the gold:

$$\begin{aligned} \forall a, s \text{ Holding}(\text{Gold}, \text{Result}(a, s)) &\Leftrightarrow \\ &[(a = \text{Grab} \wedge \text{AtGold}(s)) \\ &\vee (\text{Holding}(\text{Gold}, s) \wedge a \neq \text{Release})] \end{aligned}$$

## Keeping track of change

Facts hold in **situations**, rather than eternally

E.g., *Holding(Gold, Now)* rather than just *Holding(Gold)*


**Situation calculus** is one way to represent change in FOL:

Adds a situation argument to each non-eternal predicate

E.g., *Now* in *Holding(Gold, Now)* denotes a situation

Situations are connected by the *Result* function

*Result(a, s)* is the situation that results from doing *a* in *s*



## Making plans

Initial condition in KB:

$$\text{At}(\text{Agent}, [1, 1], S_0)$$

$$\text{At}(\text{Gold}, [1, 2], S_0)$$

**Query:** *Ask(KB, ∃ s Holding(Gold, s))*

i.e., in what situation will I be holding the gold?

**Answer:**  $\{s / \text{Result}(\text{Grab}, \text{Result}(\text{Forward}, S_0))\}$

i.e., go forward and then grab the gold

This assumes that the agent is interested in plans starting at  $S_0$  and that  $S_0$  is the only situation described in the KB

## Describing actions I

“Effect” axiom—describe changes due to action

$$\forall s \text{ AtGold}(s) \Rightarrow \text{Holding}(\text{Gold}, \text{Result}(\text{Grab}, s))$$

“Frame” axiom—describe **non-changes** due to action

$$\forall s \text{ HaveArrow}(s) \Rightarrow \text{HaveArrow}(\text{Result}(\text{Grab}, s))$$

**Frame problem:** find an elegant way to handle non-change

(a) representation—avoid frame axioms

(b) inference—avoid repeated “copy-overs” to keep track of state

**Qualification problem:** true descriptions of real actions require endless caveats—what if gold is slippery or nailed down or ...

**Ramification problem:** real actions have many secondary consequences—what about the dust on the gold, wear and tear on gloves, ...

## Making plans: A better way

Represent **plans** as action sequences  $[a_1, a_2, \dots, a_n]$

*PlanResult(p, s)* is the result of executing *p* in *s*

Then the query *Ask(KB, ∃ p Holding(Gold, PlanResult(p, S0))* has the solution  $\{p / [\text{Forward}, \text{Grab}]\}$

**Definition of PlanResult** in terms of *Result*:

$$\forall s \text{ PlanResult}([], s) = s$$

$$\forall a, p, s \text{ PlanResult}([a|p], s) = \text{PlanResult}(p, \text{Result}(a, s))$$

**Planning systems** are special-purpose reasoners designed to do this type of inference more efficiently than a general-purpose reasoner

## Summary

First-order logic:

- objects and relations are semantic primitives
- syntax: constants, functions, predicates, equality, quantifiers

Increased expressive power: sufficient to define wumpus world

Situation calculus:

- conventions for describing actions and change in FOL
- can formulate planning as inference on a situation calculus KB