#### CSE 484: Computer Security and Privacy

#### **Usable Security**

Winter 2021

David Kohlbrenner

dkohlbre@cs.washington.edu

Thanks to Franzi Roesner, Dan Boneh, Dieter Gollmann, Dan Halperin, Yoshi Kohno, Ada Lerner, John Manferdelli, John Mitchell, Vitaly Shmatikov, Bennet Yee, and many others for sample slides and materials

...

#### Admin

- Lab 3 out soon™
- Homework 2 grades out
  - https://forms.gle/C2RJNcTGv2N1dF197

#### Importance of Usability in Security

- Why is usability important?
  - People are the critical element of any computer system
    - People are the reason computers exist in the first place
  - Even if it is <u>possible</u> for a system to protect against an adversary, people may use the system in other, <u>less secure</u> ways


#### Usable Security Roadmap

- 3 case studies
  - HTTPS indicators + SSL warnings
  - Phishing
  - Password managers
- Step back: root causes of usability problems, and how to address

#### Case Study #1: Browser HTTPS Indicators

- Design question 1: How to indicate encrypted connections to users?
- Design question 2: How to alert the user if a site's SSL certificate is untrusted?
  - You discussed this in section a couple weeks ago


#### The Lock Icon

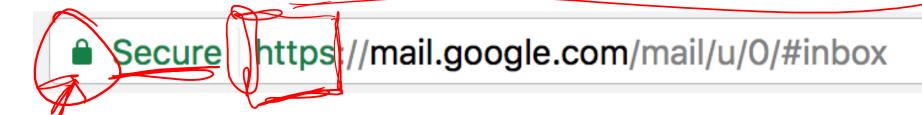

- Goal: identify secure connection
  - <u>SSL/TLS</u> is being used between client and server to protect against active network attacker
- Lock icon should only be shown when the page is secure against network attacker
  - Semantics subtle and not widely understood by users
- Whose certificate is it??
  - Problem in user interface design



#### Will You Notice?

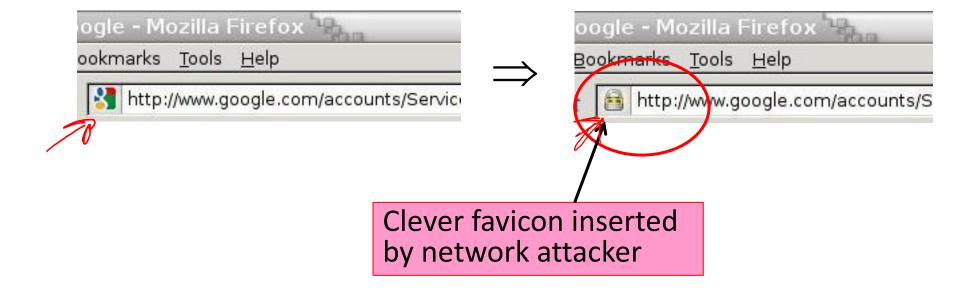


#### Do These Indicators Help? (2007)

- "The Emperor's New Security Indicators"
  - http://www.usablesecurity.org/emperor/emperor.pdf

			Gr	oup		
Score	First chose not to enter password	1	2	3	$1 \cup 2$	Total
0	upon noticing HTTPS absent	0 0%	0 0%	0 0%	0 0%	0 0%
1	after site-authentication image removed	0 0%	0 0%	2 9%	0 0%	2 4%
$\sqrt{2}$	after warning page	8 47%	5 29%	12 55%	13 37%	25 44%
3	never (always logged in)	10 53%	12 71%	8 36%	22 63%	30 53%
	Total	18	17	22	35	57


#### **Lesson:**

Users don't notice the absence of indicators!

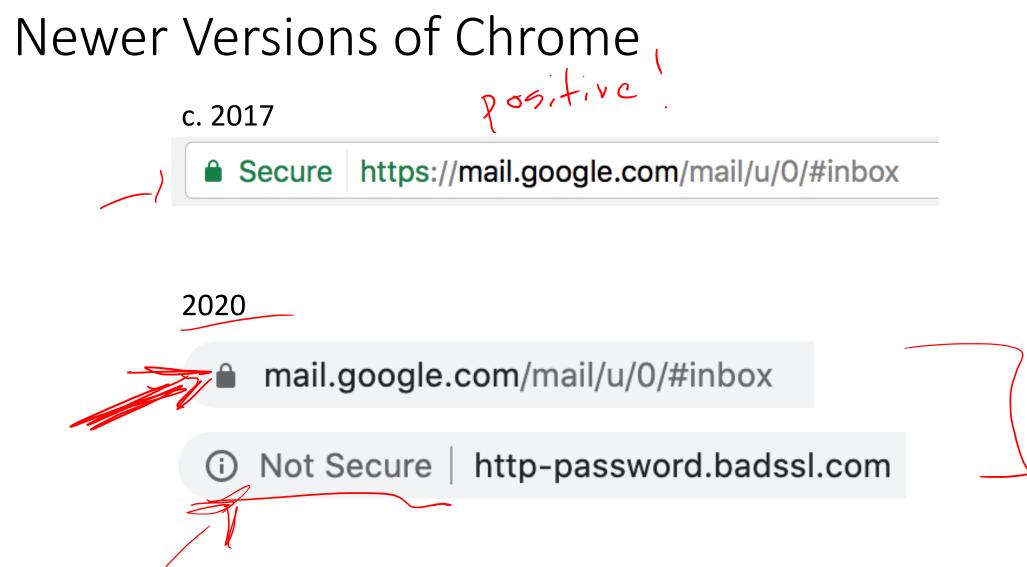


#### Case Study #1: Browser HTTPS Indicators

- Design question 1: How to indicate encrypted connections to users?
- **Design question 2:** How to alert the user if a site's SSL certificate is untrusted?
  - You discussed this in section a couple weeks ago
  - Recall: Opinionated design

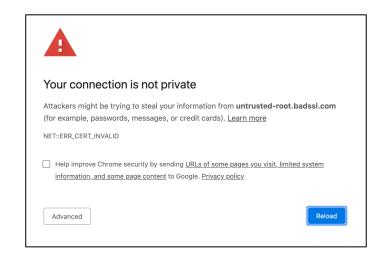

#### Challenge: Meaningful Warnings

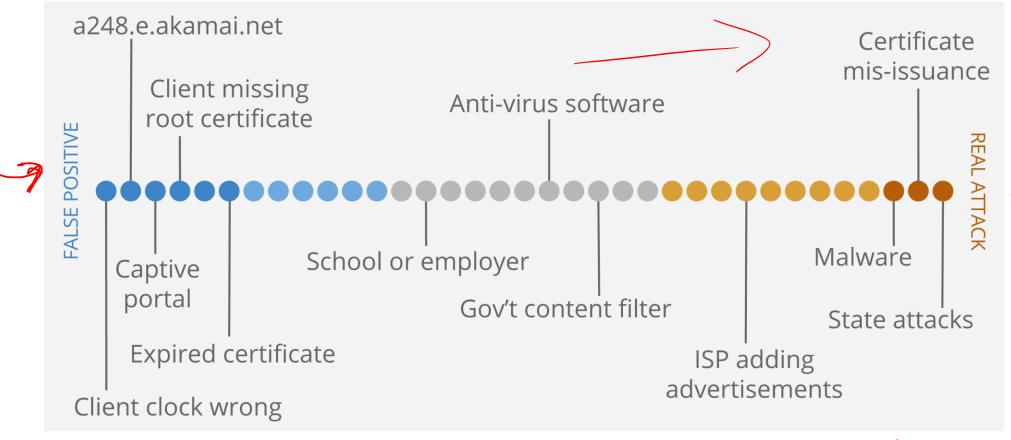

See current designs for different conditions at <a href="https://badssl.com/">https://badssl.com/</a>.




#### Case Study #2: Phishing


 Design question: How do you help users avoid falling for phishing sites?


#### A Typical Phishing Page




3/1/2021

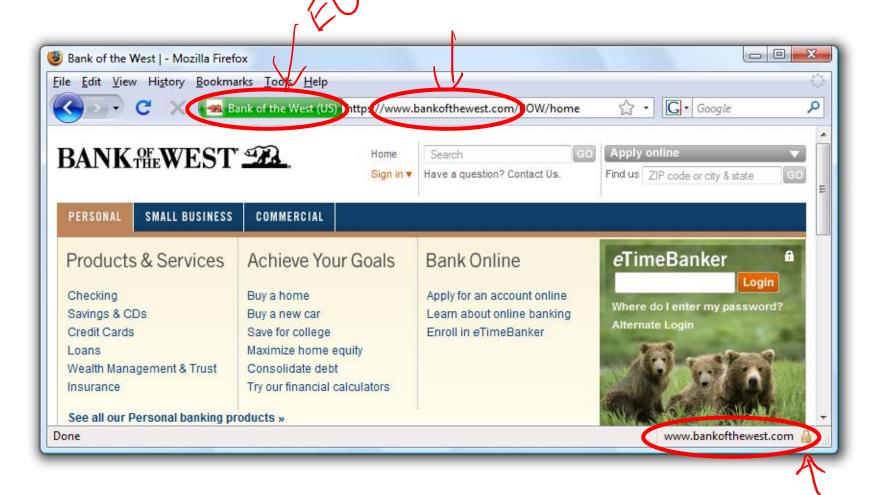


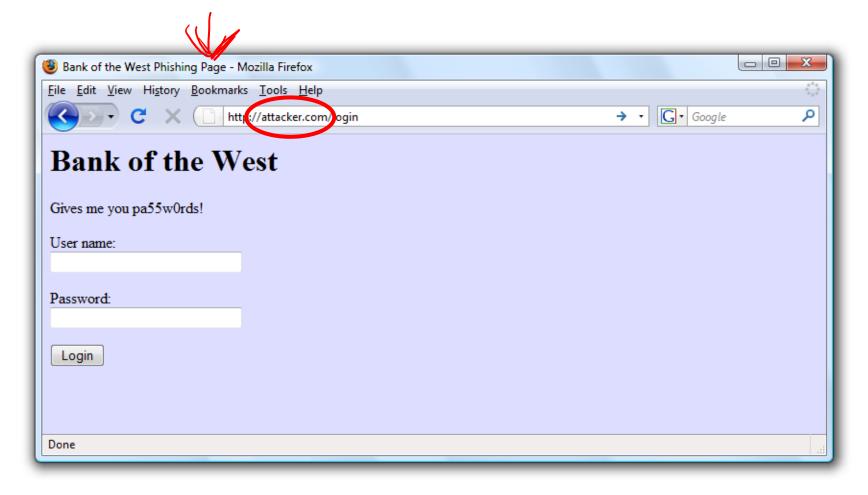

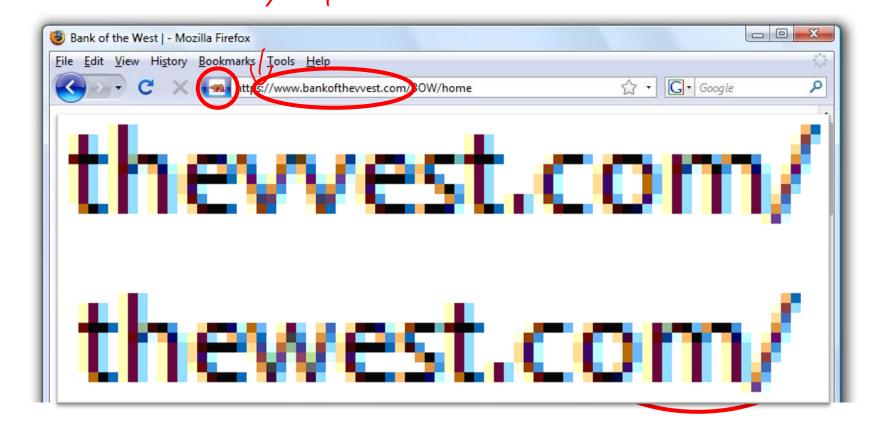

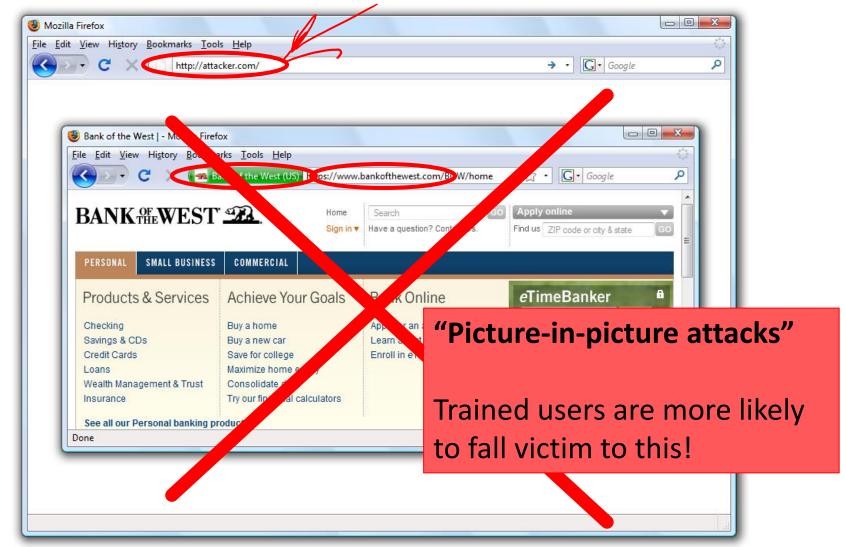

## Phishing Warnings (2008)

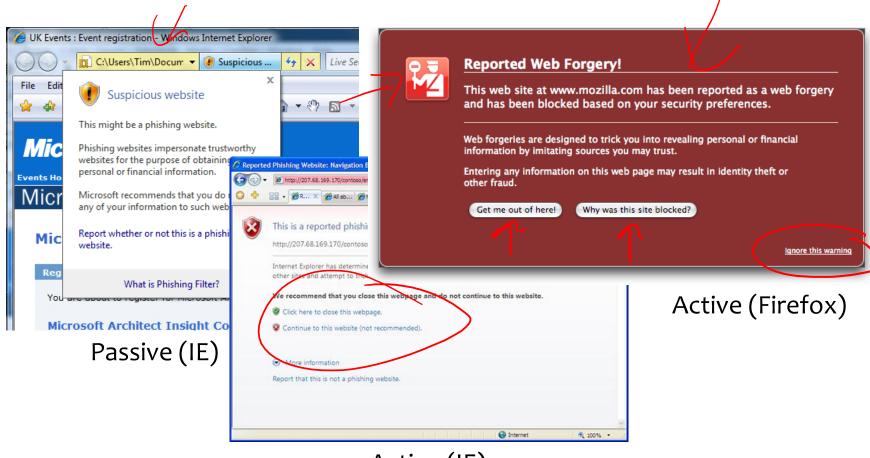

Active (IE)


18

#### Active vs. Passive Warnings

- Active warnings significantly more effective
- Passive (IE): 100% clicked, 90% phished
  - Active (IE): 95% clicked, 45% phished
  - Active (Firefox): 100% clicked, 0% phished



#### FYI: Site Authentication Image

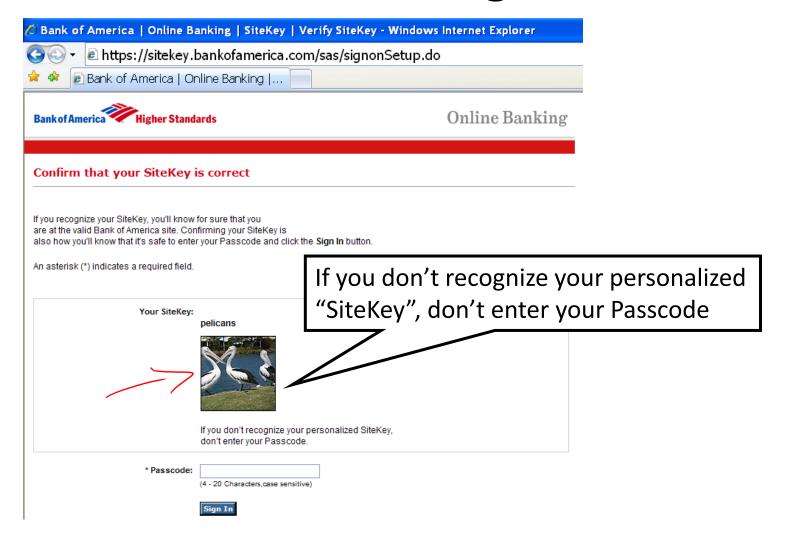

#### Case Study #3: Password Managers

- Password managers handle creating and "remembering" strong passwords
- Potentially:
  - Easier for users
  - More secure
- Early examples:
  - PwdHash (Usenix Security 2005)
  - Password Multiplier (WWW 2005)

#### **PwdHash**







@@ in front of passwords to protect; or F2

sitePwd = Hash(pwd,domain)



Prevent phishing attacks

Activate with Alt-P or double-click

sitePwd = Hash(username, pwd, domain)

Both solutions target simplicity and transparency.

#### **Usability Testing**

- Are these programs usable? If not, what are the problems?
- Approaches for evaluating usability:
  - Usability inspection (no users)
    - Cognitive walkthroughs
    - Heuristic evaluation
  - User study
    - Controlled experiments
    - Real usage

#### Task Completion Results

•	Success	Potentially Causing Security Exposures			
		Dangerous		Failures	
		Success	Failure	False Completion	Failed due to Previous
		Pwd	Hash		
Log In	48% -	44%	8%	0%	N/A
Migrate Pwd	42%	35%	11%	11%	N/A
Remote Login	27%	42%	31%	0%	N/A
Update Pwd	19% 🖊	65%	8%	8%	N/A
Second Login	52%	28%	4%	0%	16%
		Password Multiplier			
Log In	48%	44%	8%	0%	N/A
Migrate Pwd	16%	32%	28%	20%	N/A
Remote Login	N/A	N/A	N/A	N/A	N/A
Update Pwd	16%	4%	44%	28%	N/A
Second Login	16%	4%	16%	0%	16%

#### Problem: Mental Model

- Users seemed to have misaligned mental models
  - Not understand that one needs to put "@@" before *each* password to be protected.
  - Think different passwords generated for each session.
  - Think successful when were not.
  - Not know to click in field before Alt-P.
  - Don't understand what's happening: "Really, I don't see how my password is safer because of two @'s in front"

#### Problem: Transparency

- Unclear to users whether actions successful or not.
  - Should be obvious when plugin activated.
  - Should be obvious when password protected.
- Users feel that they should be able to know their own password.

#### Problem: Dangerous Errors

- Tendency to try all passwords
  - A poor security choice phishing site could collect many passwords!
  - May make the use of PwdHash or Password Multiplier worse than not using any password manager.
- Usability problem leads to security vulnerabilities.
  - Theme in course: sometimes things designed to increase security can also increase other risks

#### Root Causes? How to Improve?

- Canvas
- pollev.com/dkohlbre

#### Stepping Back: Root Causes?

- Computer systems are complex; users lack intuition
- Users in charge of managing own devices
  - Unlike other complex systems, like healthcare or cars.
- Hard to gauge risks
  - "It won't happen to me!"
- Annoying, awkward, difficult
- Social issues
  - Send encrypted emails about lunch?...

#### How to Improve?

- Security education and training <</li>
- Help users build accurate mental models
- Make security invisible
- Make security the least-resistance path




• ... [

## Beyond Specific Tools: Different User Groups

- Not all users are the same!
- Designing for one group of users, or "generic" users, may leads to dangerous failures or reasons that people will not use security tools
- Examples from (qualitative) research at UW:
- Journalists (most sources are not like Snowden!)
  - Refugees in US (security measures may embed US cultural assumptions!)

#### Firefox vs. Chrome Warning

#### 33% vs. 70% clickthrough rate

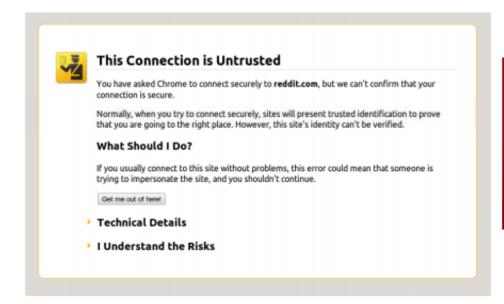



#	Condition CTR N
1	Control (default Chrome warning)
2	Chrome warning with policeman
3	Chrome warning with criminal
4	Chrome warning with traffic light
5	Mock Firefox
6	Mock Firefox, no image
7	Mock Firefox with corporate styling
	Table 1. Click-through rates and sample size for conditions.

#	Condition	CTR	N
1	Control (default Chrome warning)	67.9%	17,479
2	Chrome warning with policeman		
3	Chrome warning with criminal		
4	Chrome warning with traffic light		
5	Mock Firefox		
6	Mock Firefox, no image		
7	Mock Firefox with corporate styling		
	Table 1. Click-through rates and sample size for conditions.		

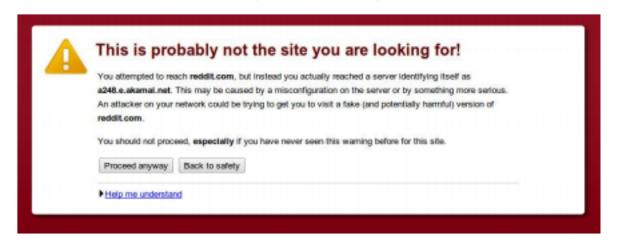


Figure 1. The default Chrome SSL warning (Condition 1).

#	Condition	CTR	N
1	Control (default Chrome warning)	67.9%	17,479
2	Chrome warning with policeman	68.9%	17,977
3	Chrome warning with criminal	66.5%	18,049
4	Chrome warning with traffic light	68.8%	18,084
5	Mock Firefox		
6	Mock Firefox, no image		
7	Mock Firefox with corporate styling		
	Table 1. Click-through rates and sample size for conditions.		



Figure 1. The default Chrome SSL warning (Condition 1).

#	Condition	CTR	N
1	Control (default Chrome warning)	67.9%	17,479
2	Chrome warning with policeman	68.9%	17,977
3	Chrome warning with criminal	66.5%	18,049
4	Chrome warning with traffic light	68.8%	18,084
5	Mock Firefox	56.1%	20,023
6	Mock Firefox, no image	55.9%	19,297
7	Mock Firefox with corporate styling		

Table 1. Click-through rates and sample size for conditions.


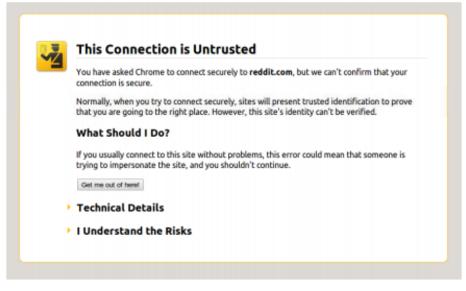


Figure 2. The mock Firefox SSL warning (Condition 5).

#	Condition	CTR	N
1	Control (default Chrome warning)	67.9%	17,479
2	Chrome warning with policeman	68.9%	17,977
3	Chrome warning with criminal	66.5%	18,049
4	Chrome warning with traffic light	68.8%	18,084
5	Mock Firefox	56.1%	20,023
6	Mock Firefox, no image	55.9%	19,297
7	Mock Firefox with corporate styling	55.8%	19,845
	Table 1. Click-through rates and sample size for conditions.		





#### Opinionated Design Helps!

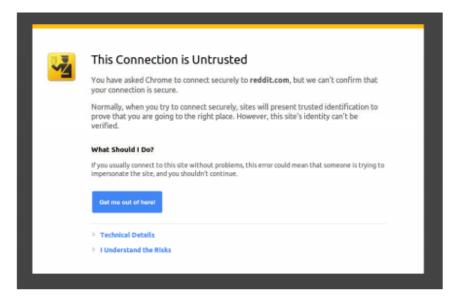

Adherence	N
30.9%	4,551


#### Opinionated Design Helps!

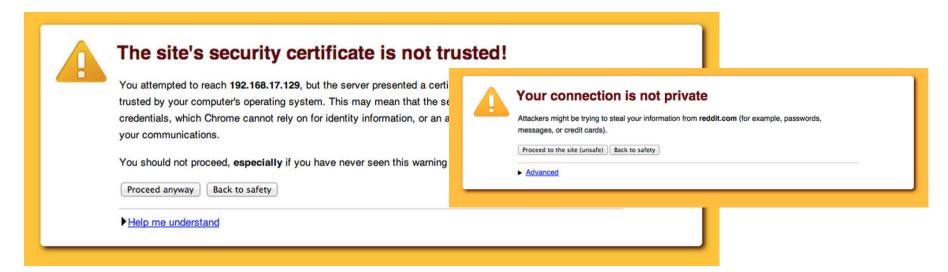

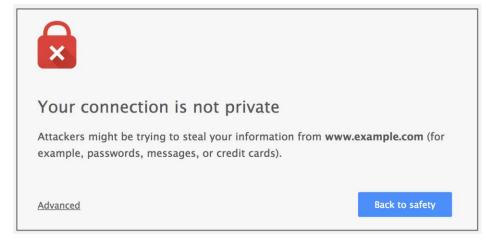

Adherence	N
30.9%	4,551
32.1%	4,075
58.3%	4,644

#### Today's Warning

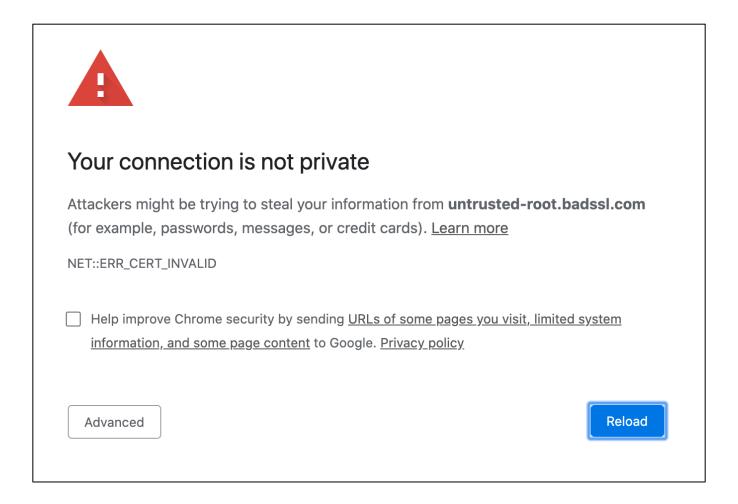

## Which warning is 'better'?

- For user security?
- For user agency?
- For user understanding?
- For... what?