CSE 484 / CSE M 584: Usable Security

Fall 2022

Franziska (Franzi) Roesner franzi@cs

UW Instruction Team: David Kohlbrenner, Yoshi Kohno, Franziska Roesner. Thanks to Dan Boneh, Dieter Gollmann, Dan Halperin, John Manferdelli, John Mitchell, Vitaly Shmatikov, Bennet Yee, and many others for sample slides and materials ...

Announcements

- Lab 2: Ongoing
- Guest lecture on Monday
 - Umar Iqbal (UW postdoctoral scholar)
 - Topic: Web privacy and tracking
- No class next Wednesday or Friday
 - Happy Thanksgiving!

Importance of Usability in Security

- Why is usability important?
 - People are the critical element of any computer system
 - People are the reason computers exist in the first place ©
 - Even if it is <u>possible</u> for a system to protect against an adversary, people may use the system in other, <u>less secure</u> ways

Usable Security Roadmap

- 3 case studies
 - HTTPS indicators + SSL warnings
 - Phishing
 - Password managers
- Step back: root causes of usability problems, and how to address

Case Study #1: Browser HTTPS Indicators

- **Design question 1:** How to indicate encrypted connections to users?
- Design question 2: How to alert the user if a site's SSL certificate is untrusted?
 - You discussed this in section last week

The Lock Icon




Secure

https://mail.google.com/mail/u/0/#inbox

- Goal: identify secure connection
 - SSL/TLS is being used between client and server to protect against active network attacker
- Lock icon should only be shown when the page is secure against network attacker
 - Semantics subtle and not widely understood by users
 - Whose certificate is it??
 - Problem in user interface design

Will You Notice?

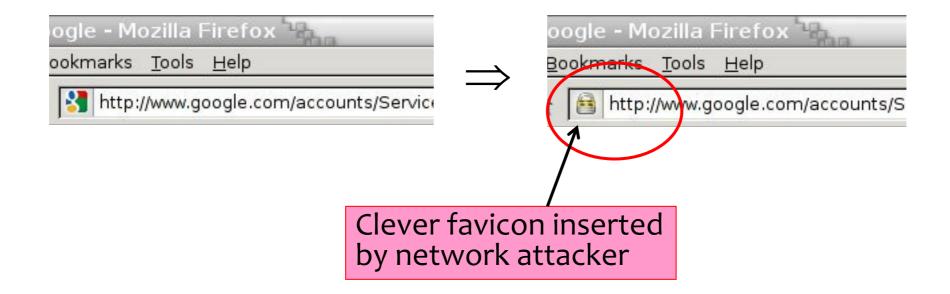

Do These Indicators Help? (2007)

- "The Emperor's New Security Indicators"
 - http://www.usablesecurity.org/emperor/emperor.pdf

		Group					
Score	First chose not to enter password	1	2	3	$1 \cup 2$	Total	
0	upon noticing HTTPS absent	0 0%	0 0%	0 0%	0 0%	0 0%	
1	after site-authentication image removed	0 0%	0 0%	2 9%	0 0%	2 4%	
2	after warning page	8 47%	5 29%	12 55%	13 37%	25 44%	
3	never (always logged in)	10 53%	12 71%	8 36%	22 63%	30 53%	
	Total	18	17	22	35	57	

Lesson:

Users don't notice the absence of indicators!

Newer Versions of Chrome

c. 2017

2020

- mail.google.com/mail/u/0/#inbox
- i Not Secure http-password.badssl.com


Case Study #1: Browser HTTPS Indicators

• **Design question 1:** How to indicate encrypted connections to users?


• **Design question 2:** How to alert the user if a site's SSL certificate is untrusted?

You discussed this in section last week

- Recall: Opinionated design

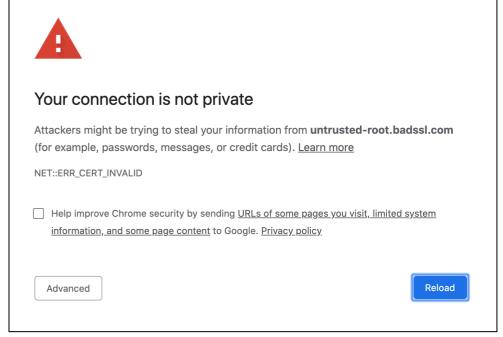

Challenge: Meaningful Warnings

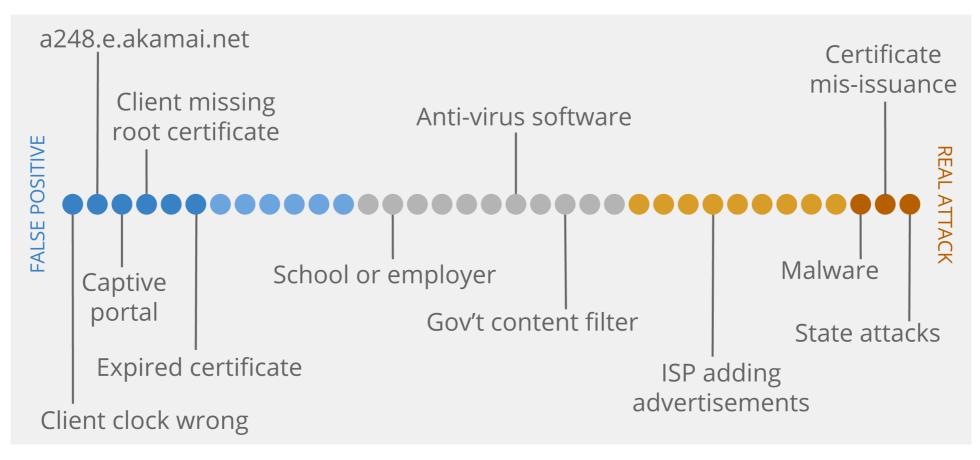


See current designs for different conditions at https://badssl.com/.


Case Study #2: Phishing


 Design question: How do you help users avoid falling for phishing sites?


A Typical Phishing Page



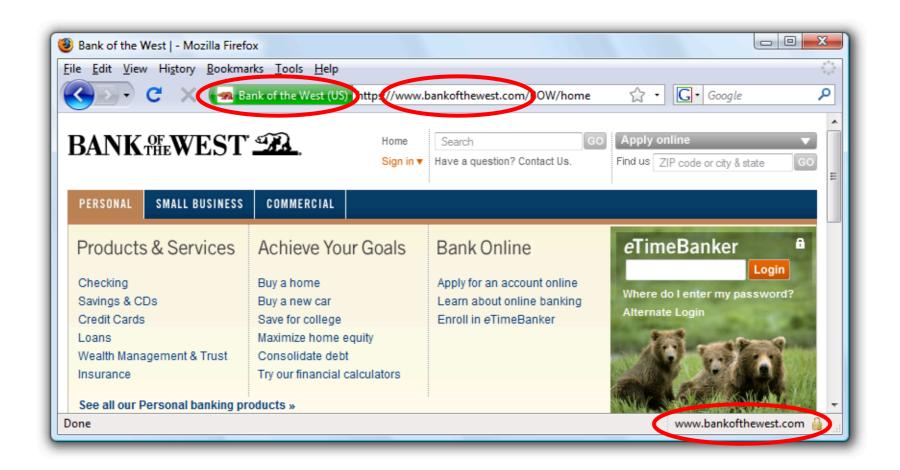

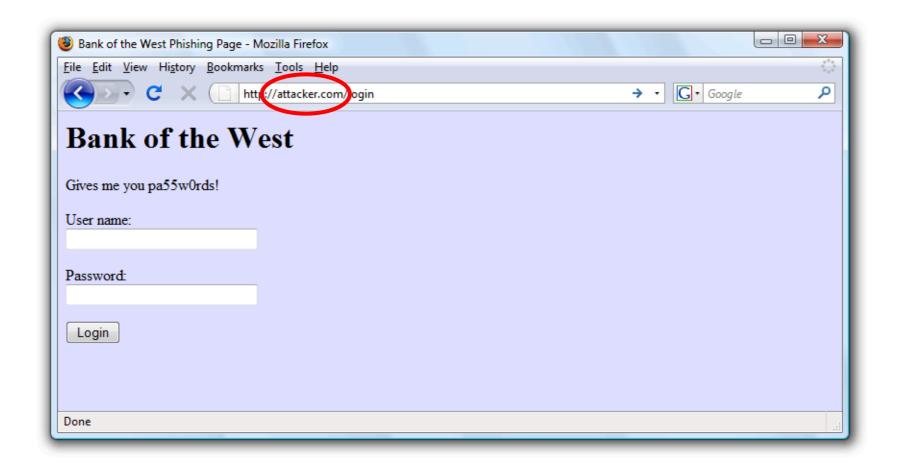

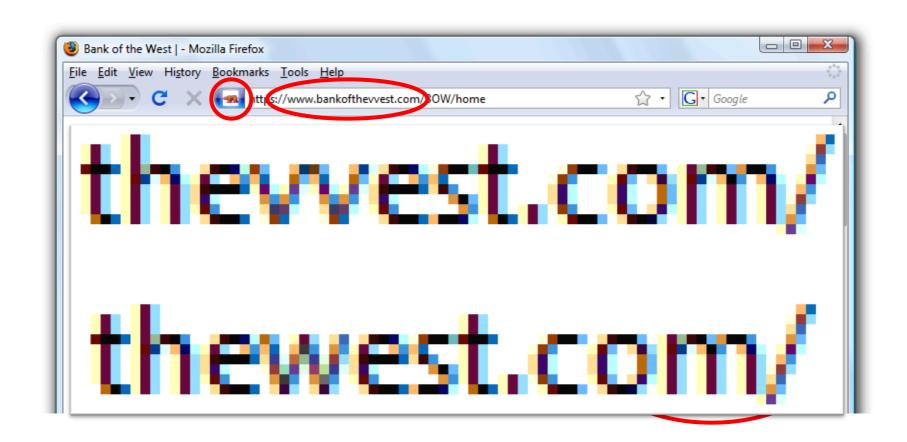

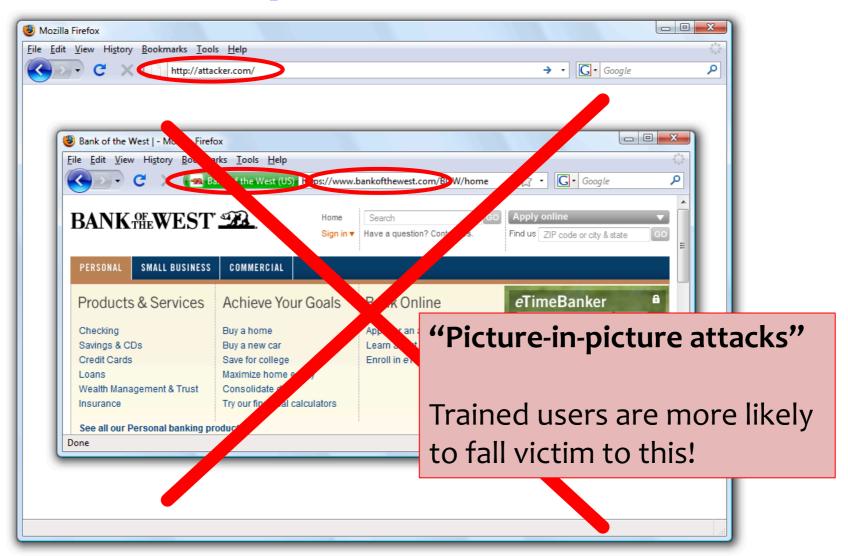


Phishing Warnings (2008)



Active (IE)

Active vs. Passive Warnings

- Active warnings significantly more effective
 - Passive (IE): 100% clicked, 90% phished
 - Active (IE): 95% clicked, 45% phished
 - Active (Firefox): 100% clicked, 0% phished

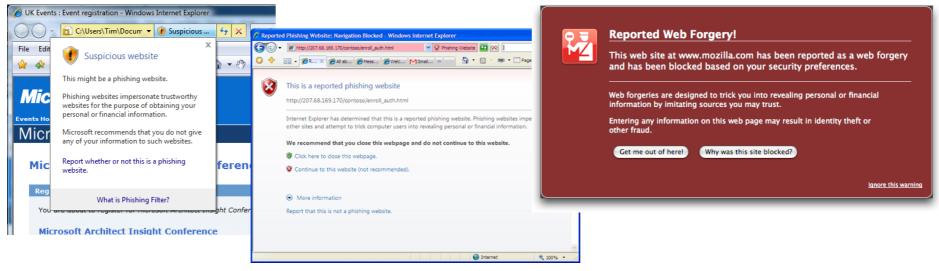


Passive (IE)

Active (IE)

Active (Firefox)

FYI: Site Authentication Image

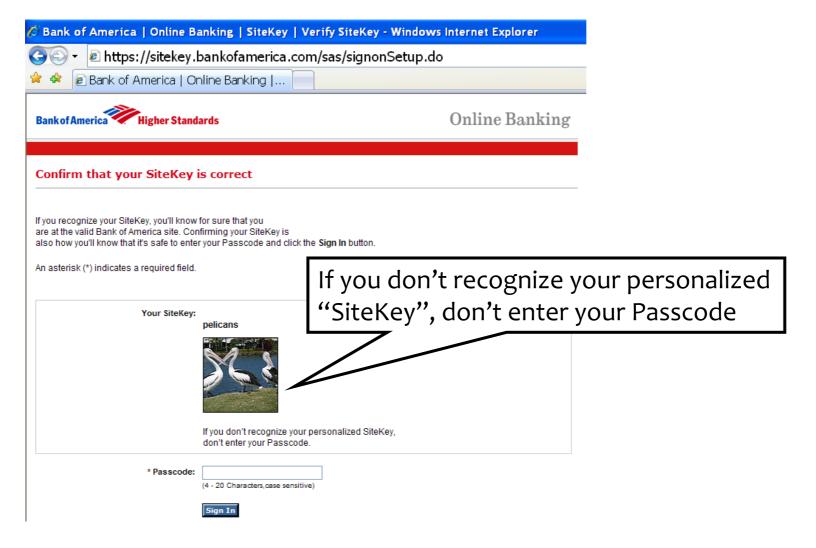

Case Study #3: Password Managers

- Password managers handle creating and "remembering" strong passwords
- Potentially:
 - Easier for users
 - More secure
- Early examples with some usable security lessons:
 - PwdHash (Usenix Security 2005)
 - Password Multiplier (WWW 2005)

PwdHash

Password Multiplier





@@ in front of passwords to protect; or F2

Activate with Alt-P or double-click

sitePwd = Hash(pwd,domain)

↑

Prevent phishing attacks

sitePwd = Hash(username, pwd, domain)

Both solutions target simplicity and transparency.

CSE 484 - Fall 2022

Usability Testing

- Are these programs usable? If not, what are the problems?
- Approaches for evaluating usability:
 - Usability inspection (no users)
 - Cognitive walkthroughs
 - Heuristic evaluation
 - User study
 - Controlled experiments
 - Real usage

Task Completion Results

	Success	Potentially Causing Security Exposures							
		Dangerous	Failures						
		Success	Failure False Completion		Failed due to Previous				
PwdHash									
Log In	48%	44%	8%	0%	N/A				
Migrate Pwd	42%	35%	11%	11%	N/A				
Remote Login	27%	42%	31%	0%	N/A				
Update Pwd	19%	65%	8%	8%	N/A				
Second Login	52%	28%	4%	0%	16%				
	Password Multiplier								
Log In	48%	44%	8%	0%	N/A				
Migrate Pwd	16%	32%	28%	20%	N/A				
Remote Login	N/A	N/A	N/A	N/A	N/A				
Update Pwd	16%	4%	44%	28%	N/A				
Second Login	16%	4%	16%	0%	16%				

Problem: Mental Model

- Users seemed to have misaligned mental models
 - Not understand that one needs to put "@@" before each password to be protected.
 - Think different passwords generated for each session.
 - Think successful when were not.
 - Not know to click in field before Alt-P.
 - Don't understand what's happening: "Really, I don't see how my password is safer because of two @'s in front"

Problem: Transparency

- Unclear to users whether actions successful or not.
 - Should be obvious when plugin activated.
 - Should be obvious when password protected.
- Users feel that they should be able to know their own password.

Problem: Dangerous Errors

- Tendency to try all passwords
 - A poor security choice phishing site could collect many passwords!
 - May make the use of PwdHash or Password Multiplier worse than not using any password manager.
- Usability problem leads to security vulnerabilities.
 - Theme in course: sometimes things designed to increase security can also increase other risks

Root Causes? How to Improve?

Stepping Back: Root Causes?

- Computer systems are complex; users lack intuition
- Users in charge of managing own devices
 - Unlike other complex systems, like healthcare or cars.
- Hard to gauge risks
 - "It won't happen to me!"
- Annoying, awkward, difficult
- Social issues
 - Send encrypted emails about lunch?...

How to Improve?

- Security education and training
- Help users build accurate mental models
- Make security invisible
- Make security the least-resistance path
- ...?

Beyond Specific Tools: Different User Groups

- Not all users are the same!
- Designing for one group of users, or "generic" users, may lead to dangerous failures or reasons that people will not use security tools
- Examples from (qualitative) research at UW:
 - Journalists (most sources are not like Snowden!)
 - Refugees in US (security measures may embed US cultural assumptions!)