

CSE 490 GZ  
Introduction to Data Compression  
Winter 2004

Nearest Neighbor Search  
for  
Vector Quantization

VQ Encoding is Nearest Neighbor Search

- Given an input vector, find the closest codeword in the codebook and output its index.
- Closest is measured in squared Euclidian distance.
- For two vectors  $(w_1, x_1, y_1, z_1)$  and  $(w_2, x_2, y_2, z_2)$ .

$$\text{Squared Distance} = (w_1 - w_2)^2 + (x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2$$


k-d Tree

- Jon Bentley, 1975
- Tree used to store spatial data.
  - Nearest neighbor search.
  - Range queries.
  - Fast look-up
- k-d tree are guaranteed  $\log_2 n$  depth where n is the number of points in the set.
  - Traditionally, k-d trees store points in d-dimensional space which are equivalent to vectors in d-dimensional space.

k-d Tree Construction


- If there is just one point, form a leaf with that point.
- Otherwise, divide the points in half by a line perpendicular to one of the axes.
- Recursively construct k-d trees for the two sets of points.
- Division strategies
  - divide points perpendicular to the axis with widest spread.
  - divide in a round-robin fashion.

k-d Tree Construction (1)















divide perpendicular to the widest spread.

k-d Tree Construction (2)

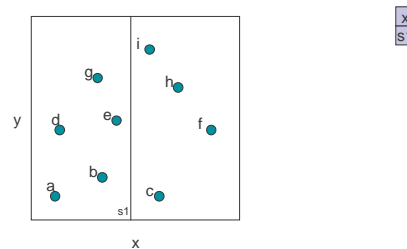


x
s1

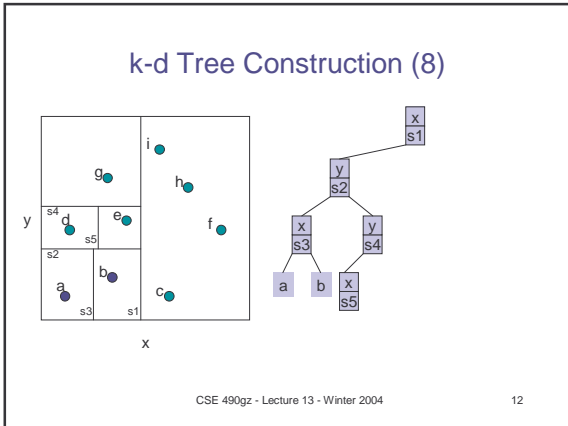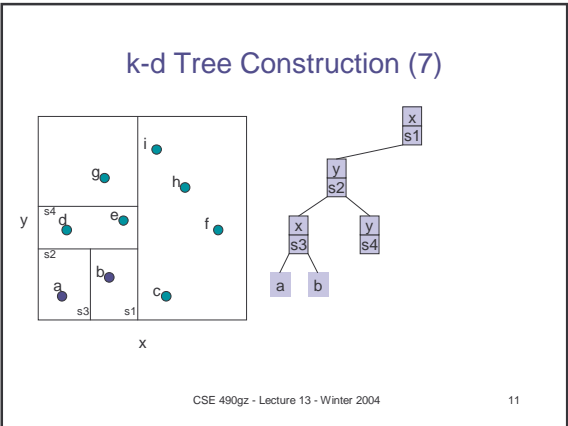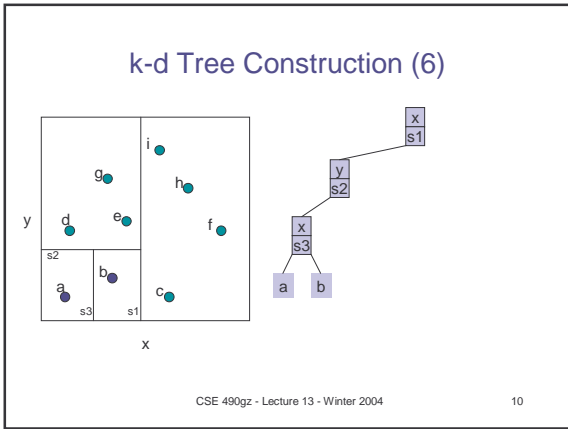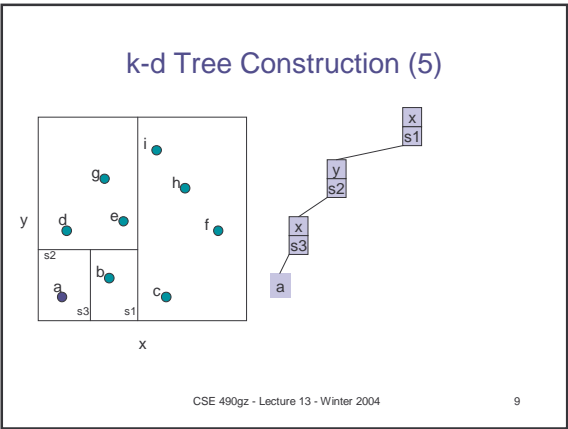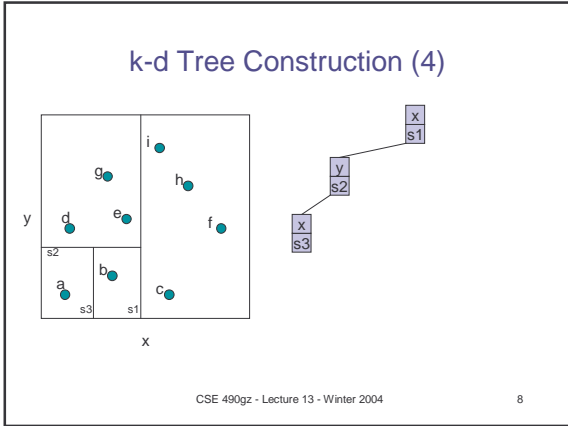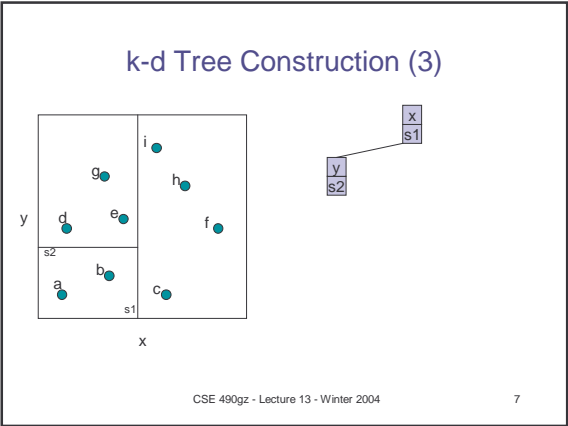

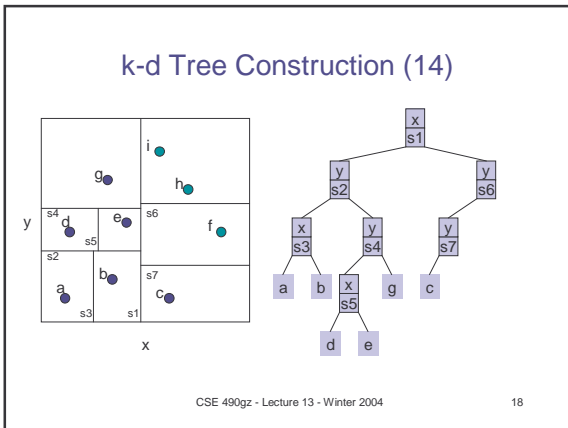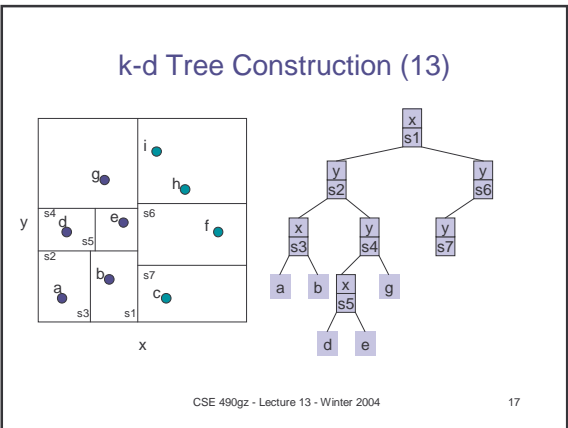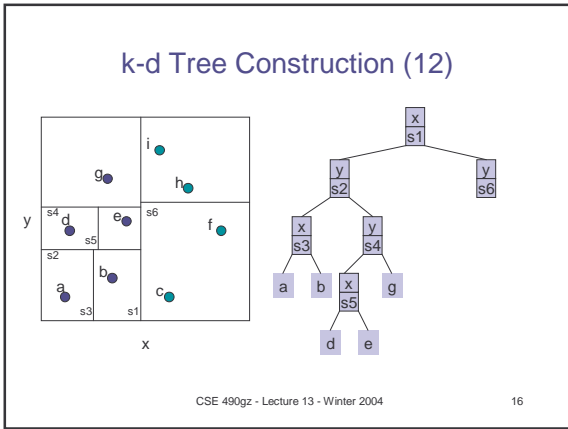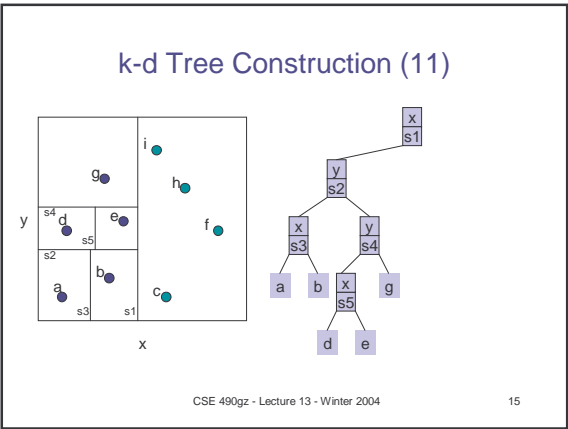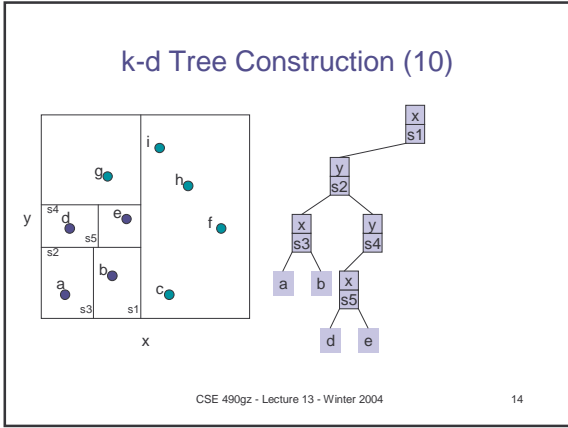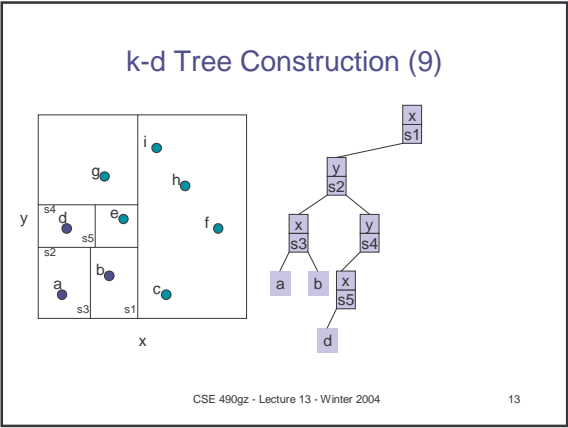


### k-d Tree Construction (15)

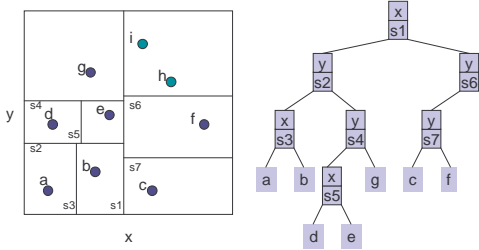

CSE 490gz - Lecture 13 - Winter 2004

19


### k-d Tree Construction (16)

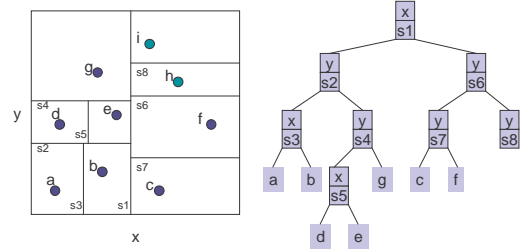

CSE 490gz - Lecture 13 - Winter 2004

20


### k-d Tree Construction (17)

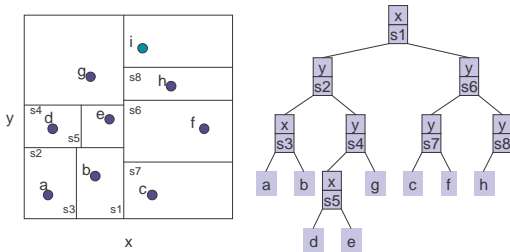

CSE 490gz - Lecture 13 - Winter 2004

21

### k-d Tree Construction (18)

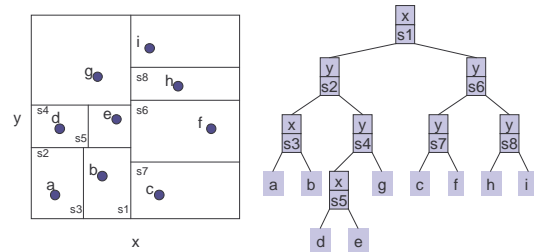

CSE 490gz - Lecture 13 - Winter 2004

22


### k-d Tree Construction Complexity

- First sort the points in each dimension.
  - $O(dn \log n)$  time and  $dn$  storage.
  - These are stored in  $A[1..d, 1..n]$
- Finding the widest spread and equally divide into two subsets can be done in  $O(dn)$  time.
- Constructing the k-d tree can be done in  $O(dn \log n)$  and  $dn$  storage

CSE 490gz - Lecture 13 - Winter 2004

23

### k-d Tree Codebook Organization

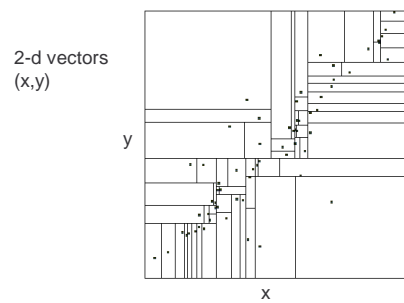

CSE 490gz - Lecture 13 - Winter 2004

24

## Node Structure for k-d Trees

- A node has 5 fields
  - axis (splitting axis)
  - value (splitting value)
  - left (left subtree)
  - right (right subtree)
  - point (holds a point if left and right children are null)

CSE 490gz - Lecture 13 - Winter 2004

25

## k-d Tree Nearest Neighbor Search

```


NNS(q: point, n: node, p: ref point w: ref distance)
if n.left = n.right = null then {leaf case}
  w' := ||q - n.point||;
  if w' < w then w := w'; p := n.point;
else
  if w = infinity then
    if q(n.axis) ≤ n.value then
      NNS(q, n.left, p, w);
    if q(n.axis) + w > n.value then NNS(q, n.right, p, w);
    else
      NNS(q, n.right, p, w);
    if q(n.axis) - w ≤ n.value then NNS(q, n.left, p, w)
  else {w is finite}
    if q(n.axis) - w ≤ n.value then NNS(q, n.left, p, w)
    if q(n.axis) + w > n.value then NNS(q, n.right, p, w);
    
```

initial call `NNS(q, root, p, infinity)`

CSE 490gz - Lecture 13 - Winter 2004

26


## Explanation

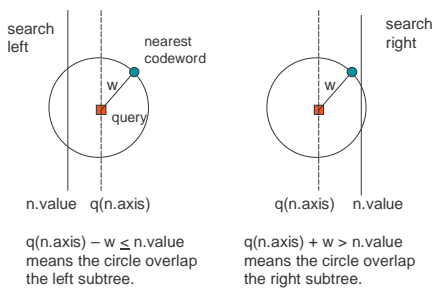

CSE 490gz - Lecture 13 - Winter 2004

27


## k-d Tree NNS (1)

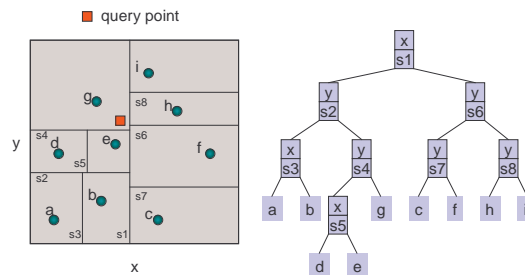

CSE 490gz - Lecture 13 - Winter 2004

28


## k-d Tree NNS (2)

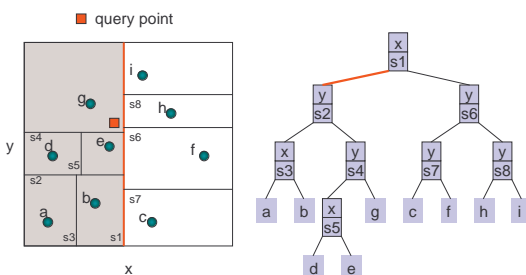

CSE 490gz - Lecture 13 - Winter 2004







29







## k-d Tree NNS (3)






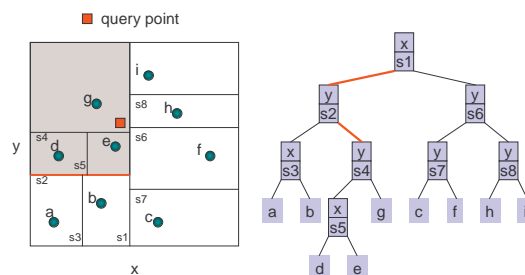


CSE 490gz - Lecture 13 - Winter 2004

30

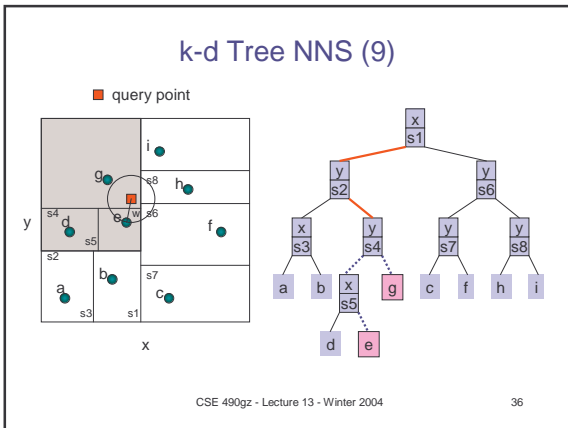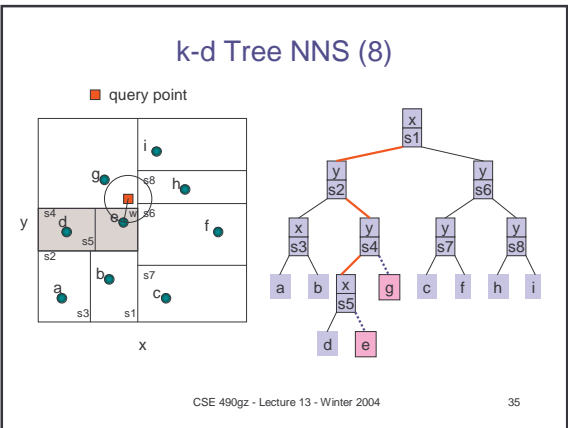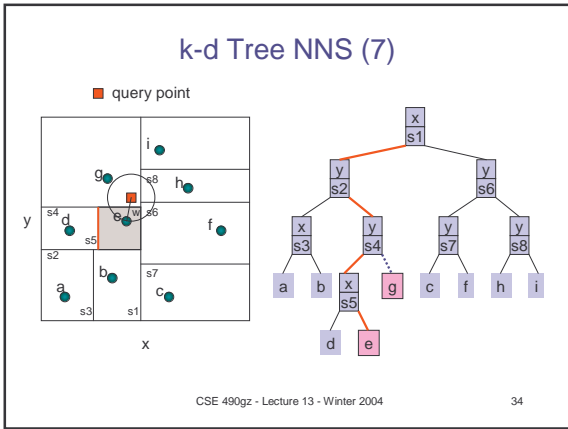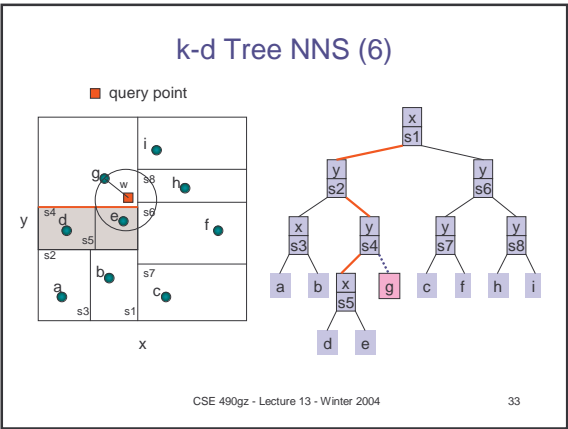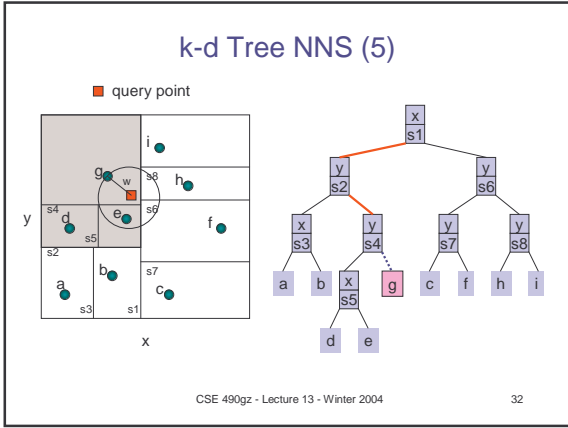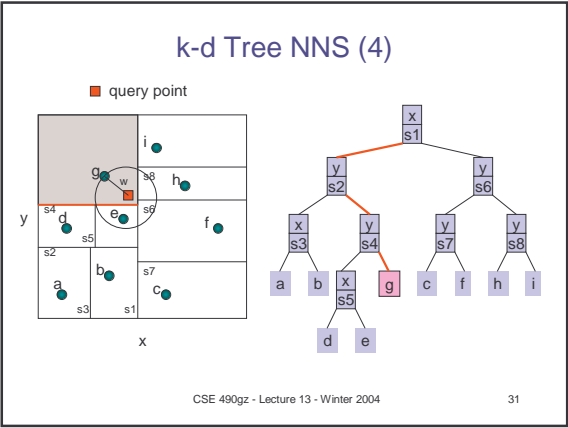

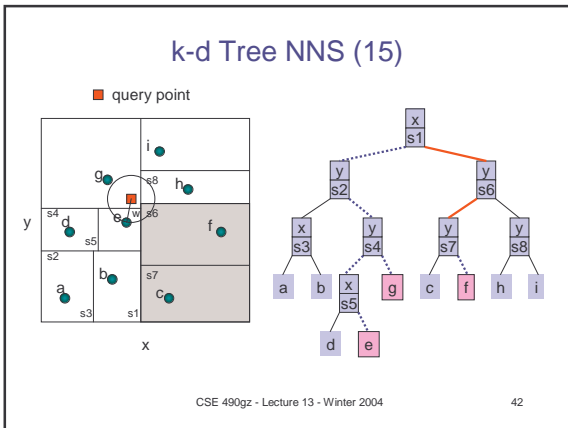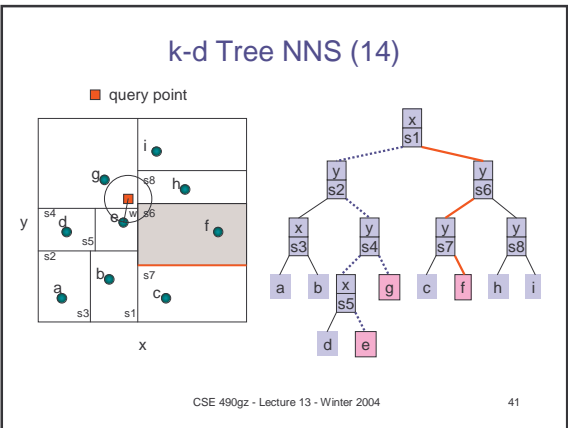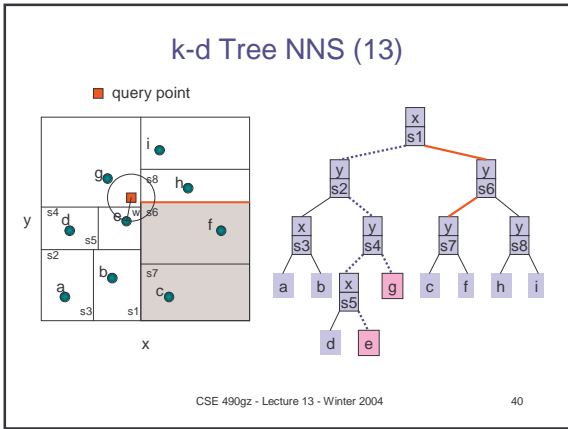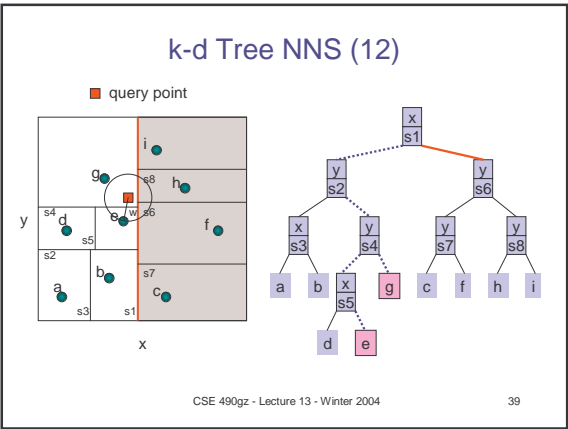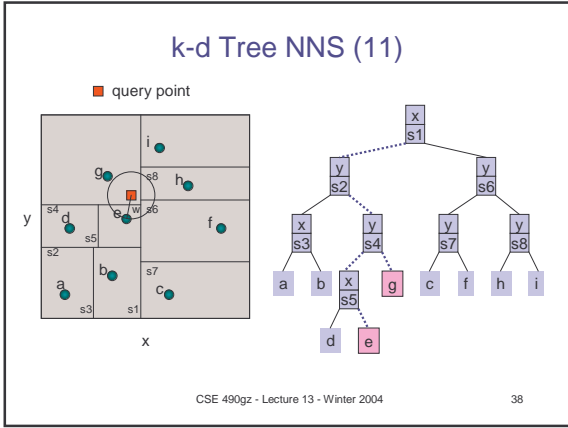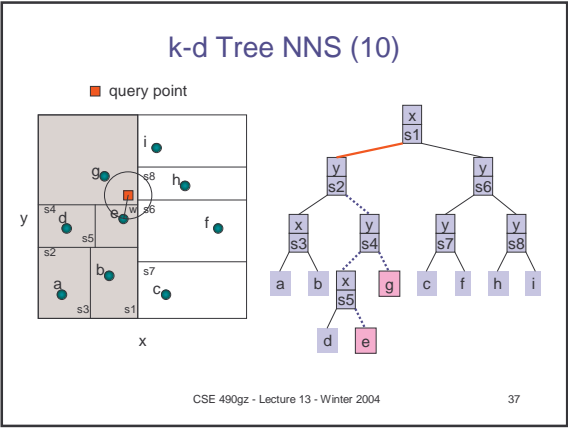

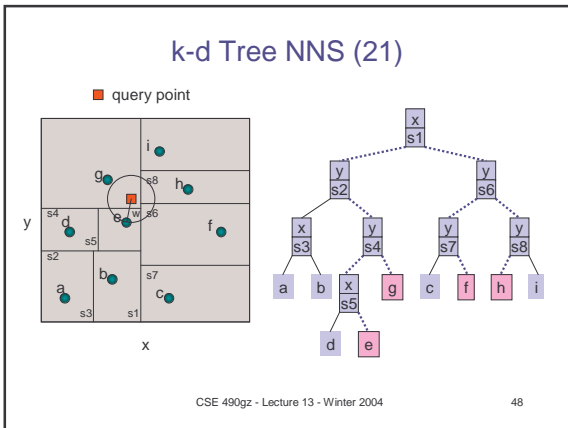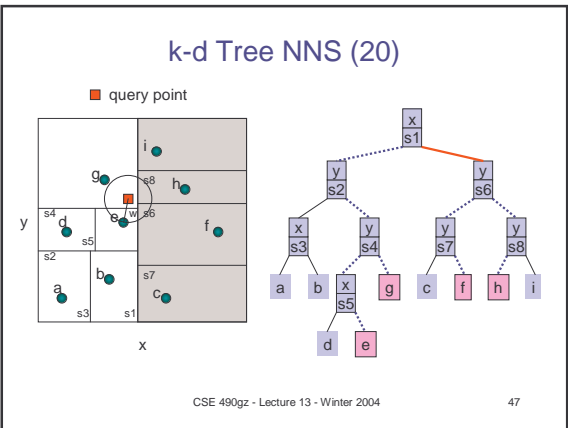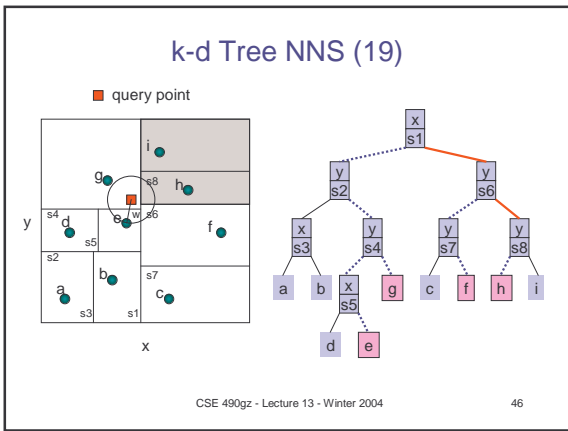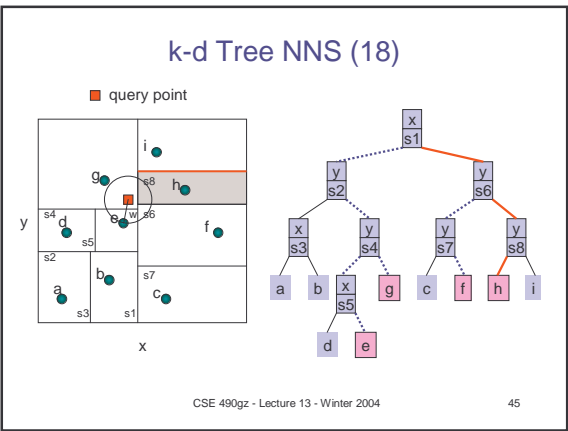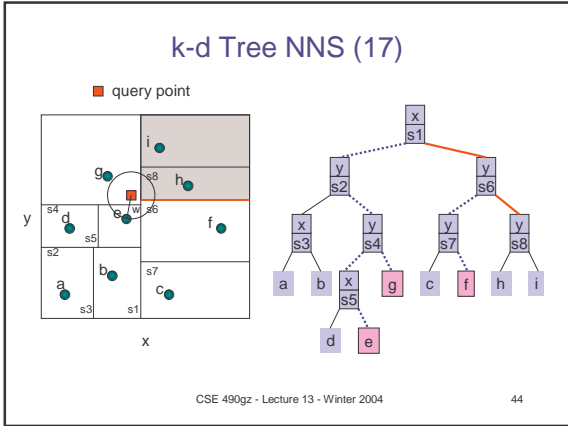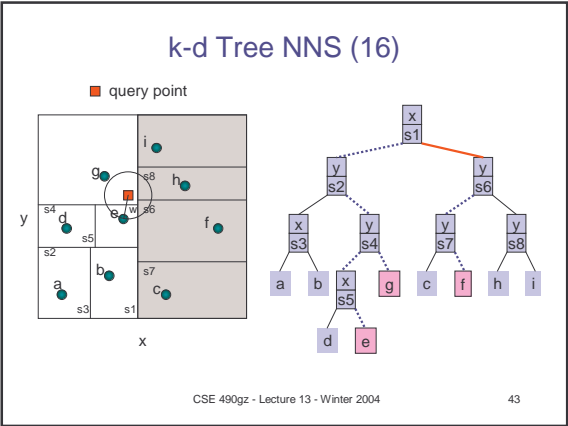



## Notes on k-d Tree NNS

- Has been shown to run in  $O(\log n)$  average time per search in a reasonable model. (Assume  $d$  a constant)
- For VQ it appears that  $O(\log n)$  is correct.
- Storage for the k-d tree is  $O(n)$ .
- Preprocessing time is  $O(n \log n)$  assuming  $d$  is a constant.

CSE 490gz - Lecture 13 - Winter 2004

49


## Alternatives

- Orchard's Algorithm (1991)
  - Uses  $O(n^2)$  storage but is very fast
- Annulus Algorithm
  - Similar to Orchard but uses  $O(n)$  storage. Does many more distance calculations.
- PCP Principal Component Partitioning
  - Zatloukal, Johnson, Ladner (1999)
  - Similar to k-d trees
  - Also very fast

CSE 490gz - Lecture 13 - Winter 2004

50


## Principal Component Partition



CSE 490gz - Lecture 13 - Winter 2004

51

## PCP Tree vs. k-d tree

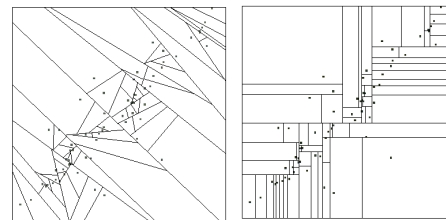


PCP

k-d

CSE 490gz - Lecture 13 - Winter 2004

52

## Comparison in Time per Search

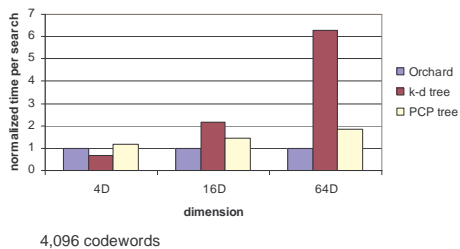

CSE 490gz - Lecture 13 - Winter 2004

53

## Notes on VQ

- Works well in some applications.
  - Requires training
- Has some interesting algorithms.
  - Codebook design
  - Nearest neighbor search
- Variable length codes for VQ.
  - PTSVQ - pruned tree structured VQ (Chou, Lookabaugh and Gray, 1989)
  - ECVQ - entropy constrained VQ (Chou, Lookabaugh and Gray, 1989)

CSE 490gz - Lecture 13 - Winter 2004

54