CSE-571
AI-based Mobile Robotics

Probabilistic Robotics

Probabilities
Bayes rule
Bayes filters

Probabilistic Robotics

Key idea: Explicit representation of uncertainty
(using the calculus of probability theory)

- Perception = state estimation
- Action = utility optimization

Axioms of Probability Theory

Pr*(A)* denotes probability that proposition *A* is true.

- $0 \le \Pr(A) \le 1$
- $\Pr(True) = 1 \qquad \Pr(False) = 0$
- $\Pr(A \vee B) = \Pr(A) + \Pr(B) - \Pr(A \wedge B)$

A Closer Look at Axiom 3

$$\Pr(A \vee B) = \Pr(A) + \Pr(B) - \Pr(A \wedge B)$$

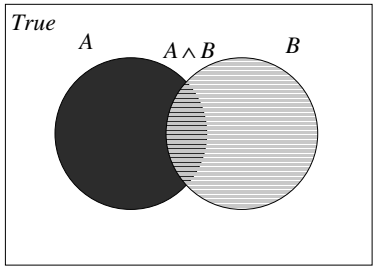

Using the Axioms

$$\begin{aligned}
\Pr(A \vee \neg A) &= \Pr(A) + \Pr(\neg A) - \Pr(A \wedge \neg A) \\
\Pr(True) &= \Pr(A) + \Pr(\neg A) - \Pr(False) \\
1 &= \Pr(A) + \Pr(\neg A) - 0 \\
\Pr(\neg A) &= 1 - \Pr(A)
\end{aligned}$$

Discrete Random Variables

- *X* denotes a random variable.
- *X* can take on a countable number of values in $\{x_1, x_2, \ldots, x_n\}$.
- $P(X=x_i)$, or $P(x_i)$, is the probability that the random variable *X* takes on value x_i.
- $P(\cdot)$ is called probability mass function.
- E.g. $P(Room) = \langle 0.7, 0.2, 0.08, 0.02 \rangle$

Continuous Random Variables

- *X* takes on values in the continuum.
- $p(X=x)$, or $p(x)$, is a probability density function.

$$\Pr(x \in (a,b)) = \int_a^b p(x)dx$$

- E.g.

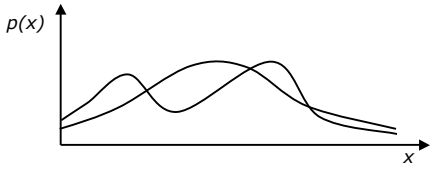

Joint and Conditional Probability

- $P(X=x \text{ and } Y=y) = P(x,y)$
- If X and Y are independent then
  $P(x,y) = P(x)\,P(y)$
- $P(x \mid y)$ is the probability of *x* given *y*
  $P(x \mid y) = P(x,y) / P(y)$
  $P(x,y) = P(x \mid y)\,P(y)$
- If X and Y are independent then
  $P(x \mid y) = P(x)$

Law of Total Probability, Marginals

Discrete case	Continuous case
$\sum_x P(x) = 1$	$\int p(x)\,dx = 1$
$P(x) = \sum_y P(x, y)$	$p(x) = \int p(x, y)\,dy$
$P(x) = \sum_y P(x \mid y) P(y)$	$p(x) = \int p(x \mid y)\, p(y)\,dy$

Bayes Formula

$$P(x, y) = P(x \mid y) P(y) = P(y \mid x) P(x)$$

$$\Rightarrow$$

$$P(x \mid y) = \frac{P(y \mid x)\ P(x)}{P(y)} = \frac{\text{likelihood} \cdot \text{prior}}{\text{evidence}}$$

Normalization

$$P(x \mid y) = \frac{P(y \mid x)\ P(x)}{P(y)} = \eta\ P(y \mid x)\, P(x)$$

$$\eta = P(y)^{-1} = \frac{1}{\sum_x P(y \mid x) P(x)}$$

Algorithm:

$$\forall x : \text{aux}_{x|y} = P(y \mid x)\ P(x)$$

$$\eta = \frac{1}{\sum_x \text{aux}_{x|y}}$$

$$\forall x : P(x \mid y) = \eta\, \text{aux}_{x|y}$$

Conditioning

- Total probability:

$$P(x \mid y) \stackrel{?}{=} \int P(x \mid y, z)\, P(z)\,dz$$

$$\stackrel{?}{=} \int P(x \mid y, z)\, P(z \mid y)\,dz$$

$$\stackrel{?}{=} \int P(x \mid y, z)\, P(y \mid z)\,dz$$

Conditioning

- Total probability:

$$P(x|y) = \int P(x \mid y, z)\, P(z \mid y)\, dz$$

- Bayes rule and background knowledge:

$$P(x \mid y, z) = \frac{P(y \mid x, z)\ P(x \mid z)}{P(y \mid z)}$$

Simple Example of State Estimation

- Suppose a robot obtains measurement z
- What is *P(doorOpen|z)?*

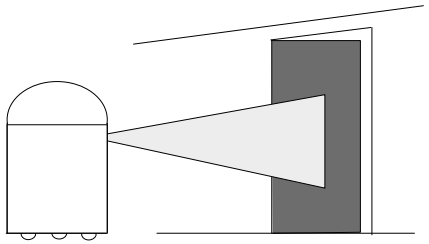

Causal vs. Diagnostic Reasoning

- *P(open|z)* is diagnostic.
- *P(z|open)* is causal.
- Often causal knowledge is easier to obtain. **count frequencies!**
- Bayes rule allows us to use causal knowledge:

$$P(open \mid z) = \frac{P(z \mid open)P(open)}{P(z)}$$

Example

- $P(z|open) = 0.6 \qquad P(z|\neg open) = 0.3$
- $P(open) = P(\neg open) = 0.5$

$$P(open \mid z) = \frac{P(z \mid open)P(open)}{P(z \mid open)p(open) + P(z \mid \neg open)p(\neg open)}$$

$$P(open \mid z) = \frac{0.6 \cdot 0.5}{0.6 \cdot 0.5 + 0.3 \cdot 0.5} = \frac{2}{3} = 0.67$$

- *z* raises the probability that the door is open.

Combining Evidence

- Suppose our robot obtains another observation z_2.
- How can we integrate this new information?
- More generally, how can we estimate $P(x| z_1...z_n)$?

Recursive Bayesian Updating

$$P(x \mid z_1,\ldots,z_n) = \frac{P(z_n \mid x, z_1,\ldots,z_{n-1})\, P(x \mid z_1,\ldots,z_{n-1})}{P(z_n \mid z_1,\ldots,z_{n-1})}$$

Markov assumption: z_n is independent of $z_1,\ldots,z_{n-1}$ if we know x.

$$\begin{aligned} P(x \mid z_1,\ldots,z_n) &= \frac{P(z_n \mid x)\, P(x \mid z_1,\ldots,z_{n-1})}{P(z_n \mid z_1,\ldots,z_{n-1})} \\ &= \eta\, P(z_n \mid x)\, P(x \mid z_1,\ldots,z_{n-1}) \\ &= \eta_{1\ldots n} \prod_{i=1\ldots n} P(z_i \mid x)\, P(x) \end{aligned}$$

Example: Second Measurement

- $P(z_2|open) = 0.5 \qquad P(z_2|\neg open) = 0.6$
- $P(open|z_1)=2/3$

$$P(open \mid z_2, z_1) = \frac{P(z_2 \mid open)\, P(open \mid z_1)}{P(z_2 \mid open)\, P(open \mid z_1) + P(z_2 \mid \neg open)\, P(\neg open \mid z_1)}$$

$$= \frac{\frac{1}{2}\cdot\frac{2}{3}}{\frac{1}{2}\cdot\frac{2}{3}+\frac{3}{5}\cdot\frac{1}{3}} = \frac{5}{8} = 0.625$$

- z_2 lowers the probability that the door is open.

Bayes Filters: Framework

- **Given:**
  - Stream of observations z and action data u:
    $$d_t = \{u_1, z_2 \ldots, u_{t-1}, z_t\}$$
  - Sensor model $P(z|x)$.
  - Action model $P(x|u,x')$.
  - Prior probability of the system state $P(x)$.
- **Wanted:**
  - Estimate of the state X of a dynamical system.
  - The posterior of the state is also called **Belief**:
    $$Bel(x_t) = P(x_t \mid u_1, z_2 \ldots, u_{t-1}, z_t)$$

Markov Assumption

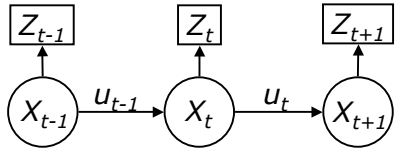

$$p(d_t, d_{t-1}, \ldots d_0 \mid x_t, d_{t+1}, d_{t+2}, \ldots) = p(d_t, d_{t-1}, \ldots d_0 \mid x_t)$$

$$p(d_t, d_{t+1}, \ldots \mid x_t, d_1, d_2, \ldots d_{t-1}) = p(d_t, d_{t+1}, \ldots \mid x_t)$$

Underlying Assumptions

- Static world
- Independent noise
- Perfect model, no approximation errors

Bayes Filters

z = observation
u = action
x = state

$$Bel(x_t) = P(x_t \mid u_1, z_2 \ldots, u_{t-1}, z_t)$$

Bayes $$= \eta\ P(z_t \mid x_t, u_1, z_2, \ldots, u_{t-1})\ P(x_t \mid u_1, z_2, \ldots, u_{t-1})$$

Markov $$= \eta\ P(z_t \mid x_t)\ P(x_t \mid u_1, z_2, \ldots, u_{t-1})$$

Total prob. $$= \eta\ P(z_t \mid x_t) \int P(x_t \mid u_1, z_2, \ldots, u_{t-1}, x_{t-1})\ P(x_{t-1} \mid u_1, z_2, \ldots, u_{t-1})\ dx_{t-1}$$

Markov $$= \eta\ P(z_t \mid x_t) \int P(x_t \mid u_{t-1}, x_{t-1})\ P(x_{t-1} \mid u_1, z_2, \ldots, u_{t-1})\ dx_{t-1}$$

$$= \eta\ P(z_t \mid x_t) \int P(x_t \mid u_{t-1}, x_{t-1})\ Bel(x_{t-1})\ dx_{t-1}$$

$$Bel(x_t) = \eta\ P(z_t \mid x_t) \int P(x_t \mid u_{t-1}, x_{t-1})\ Bel(x_{t-1})\ dx_{t-1}$$

1. Algorithm **Bayes_filter**(*Bel(x),d*):
2. η=0
3. If *d* is a perceptual data item *z* then
4. For all *x* do
5. $Bel'(x) = P(z \mid x) Bel(x)$
6. $\eta = \eta + Bel'(x)$
7. For all *x* do
8. $Bel'(x) = \eta^{-1} Bel'(x)$
9. Else if *d* is an action data item *u* then
10. For all *x* do
11. $Bel'(x) = \int P(x \mid u, x')\ Bel(x')\ dx'$
12. Return *Bel'(x)*

Bayes Filters for Robot Localization

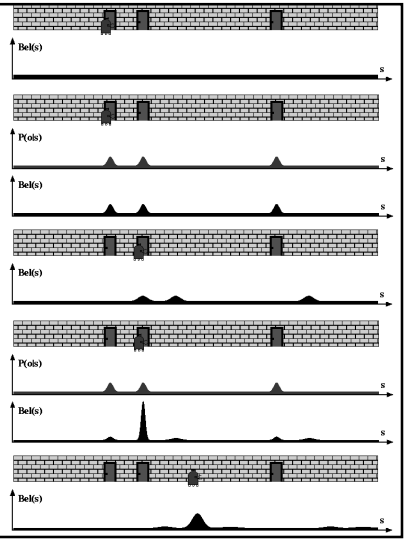

Dynamic Environments

- Two possible locations x_1 and x_2
- $P(x_1)=0.99$
- $P(z|x_2)=0.09$ $P(z|x_1)=0.07$

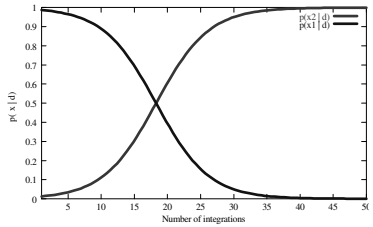

Bayes Filters are Familiar!

$$Bel(x_t) = \eta\ P(z_t \mid x_t) \int P(x_t \mid u_{t-1}, x_{t-1})\ Bel(x_{t-1})\ dx_{t-1}$$

- Kalman filters
- Particle filters
- Hidden Markov models
- Dynamic Bayes networks
- Partially Observable Markov Decision Processes (POMDPs)

Summary

- Bayes rule allows us to compute probabilities that are hard to assess otherwise.
- Under the Markov assumption, recursive Bayesian updating can be used to efficiently combine evidence.
- Bayes filters are a probabilistic tool for estimating the state of dynamic systems.