CSE-571
AI-based Mobile Robotics

Probabilistic Robotics

Probabilities
Bayes rule
Bayes filters

Probabilistic Robotics

Key idea: Explicit representation of uncertainty
(using the calculus of probability theory)

- Perception = state estimation
- Action = utility optimization

Axioms of Probability Theory

Pr*(A)* denotes probability that proposition *A* is true.

- $0 \le \Pr(A) \le 1$
- $\Pr(True) = 1 \qquad \Pr(False) = 0$
- $\Pr(A \vee B) = \Pr(A) + \Pr(B) - \Pr(A \wedge B)$

Discrete Random Variables

- *X* denotes a random variable.
- *X* can take on a countable number of values in $\{x_1, x_2, \ldots, x_n\}$.
- $P(X=x_i)$, or $P(x_i)$, is the probability that the random variable *X* takes on value x_i.
- *P(·)* is called probability mass function.
- E.g. $P(Room) = \langle 0.7, 0.2, 0.08, 0.02 \rangle$

Continuous Random Variables

- *X* takes on values in the continuum.
- *p(X=x)*, or *p(x)*, is a probability density function.

$$\Pr(x \in (a,b)) = \int_a^b p(x)\,dx$$

- E.g.



Joint and Conditional Probability

- *P(X=x* and *Y=y) = P(x,y)*
- If X and Y are independent then
  P(x,y) = P(x) P(y)
- *P(x | y)* is the probability of *x* given *y*
  P(x | y) = P(x,y) / P(y)
  P(x,y) = P(x | y) P(y)
- If X and Y are independent then
  P(x | y) = P(x)

Law of Total Probability, Marginals

Discrete case	Continuous case
$\sum_x P(x) = 1$	$\int p(x)\,dx = 1$
$P(x) = \sum_y P(x, y)$	$p(x) = \int p(x, y)\,dy$
$P(x) = \sum_y P(x \mid y) P(y)$	$p(x) = \int p(x \mid y)\, p(y)\,dy$

Bayes Formula

$$P(x, y) = P(x \mid y) P(y) = P(y \mid x) P(x)$$

$$\Rightarrow$$

$$P(x \mid y) = \frac{P(y \mid x)\ P(x)}{P(y)} = \frac{\text{likelihood} \cdot \text{prior}}{\text{evidence}}$$

Normalization

$$P(x \mid y) = \frac{P(y \mid x)\ P(x)}{P(y)} = \eta\ P(y \mid x)\, P(x)$$

$$\eta = P(y)^{-1} = \frac{1}{\sum_x P(y \mid x) P(x)}$$

Algorithm:

$$\forall x : \text{aux}_{x|y} = P(y \mid x)\ P(x)$$

$$\eta = \frac{1}{\sum_x \text{aux}_{x|y}}$$

$$\forall x : P(x \mid y) = \eta\, \text{aux}_{x|y}$$

Conditioning

- Total probability:

$$P(x \mid y) \overset{?}{=} \int P(x \mid y, z)\, P(z)\,dz$$

$$\overset{?}{=} \int P(x \mid y, z)\, P(z \mid y)\,dz$$

$$\overset{?}{=} \int P(x \mid y, z)\, P(y \mid z)\,dz$$

Conditioning

- Total probability:

$$P(x \mid y) = \int P(x \mid y, z)\, P(z \mid y)\,dz$$

- Bayes rule and background knowledge:

$$P(x \mid y, z) = \frac{P(y \mid x, z)\ P(x \mid z)}{P(y \mid z)}$$

Conditional Independence

$$P(x, y \mid z) = P(x \mid z) P(y \mid z)$$

- Equivalent to

$$P(x \mid z) = P(x \mid z, y)$$

and

$$P(y \mid z) = P(y \mid z, x)$$

Simple Example of State Estimation

- Suppose a robot obtains measurement z
- What is *P(doorOpen|z)?*



Causal vs. Diagnostic Reasoning

- *P(open|z)* is diagnostic.
- *P(z|open)* is causal.
- Often causal knowledge is easier to obtain. **count frequencies!**
- Bayes rule allows us to use causal knowledge:

$$P(open \mid z) = \frac{P(z \mid open)P(open)}{P(z)}$$

Example

- $P(z|open) = 0.6 \qquad P(z|\neg open) = 0.3$
- $P(open) = P(\neg open) = 0.5$

$$P(open \mid z) = \frac{P(z \mid open)P(open)}{P(z \mid open)p(open) + P(z \mid \neg open)p(\neg open)}$$

$$P(open \mid z) = \frac{0.6 \cdot 0.5}{0.6 \cdot 0.5 + 0.3 \cdot 0.5} = \frac{2}{3} = 0.67$$

- z raises the probability that the door is open.

Combining Evidence

- Suppose our robot obtains another observation z_2.
- How can we integrate this new information?
- More generally, how can we estimate $P(x| z_1...z_n)$?

Recursive Bayesian Updating

$$P(x \mid z_1,\ldots,z_n) = \frac{P(z_n \mid x, z_1,\ldots,z_{n-1})\, P(x \mid z_1,\ldots,z_{n-1})}{P(z_n \mid z_1,\ldots,z_{n-1})}$$

Markov assumption: z_n is independent of $z_1,\ldots,z_{n-1}$ if we know x.

$$\begin{aligned} P(x \mid z_1,\ldots,z_n) &= \frac{P(z_n \mid x)\, P(x \mid z_1,\ldots,z_{n-1})}{P(z_n \mid z_1,\ldots,z_{n-1})} \\ &= \eta\, P(z_n \mid x)\, P(x \mid z_1,\ldots,z_{n-1}) \\ &= \eta_{1\ldots n} \prod_{i=1\ldots n} P(z_i \mid x)\, P(x) \end{aligned}$$

Example: Second Measurement

- $P(z_2|open) = 0.5 \qquad P(z_2|\neg open) = 0.6$
- $P(open|z_1)=2/3$

$$P(open \mid z_2, z_1) = \frac{P(z_2 \mid open)\, P(open \mid z_1)}{P(z_2 \mid open)\, P(open \mid z_1) + P(z_2 \mid \neg open)\, P(\neg open \mid z_1)}$$

$$= \frac{\frac{1}{2} \cdot \frac{2}{3}}{\frac{1}{2} \cdot \frac{2}{3} + \frac{3}{5} \cdot \frac{1}{3}} = \frac{5}{8} = 0.625$$

- z_2 lowers the probability that the door is open.

Bayes Filters: Framework

- **Given:**
  - Stream of observations *z* and action data *u:*
    $$d_t = \{u_1, z_2 \ldots, u_{t-1}, z_t\}$$
  - Sensor model *P(z|x).*
  - Action model *P(x|u,x').*
  - Prior probability of the system state *P(x).*
- **Wanted:**
  - Estimate of the state *X* of a dynamical system.
  - The posterior of the state is also called **Belief**:
    $$Bel(x_t) = P(x_t \mid u_1, z_2 \ldots, u_{t-1}, z_t)$$

Markov Assumption



$$p(z_t \mid x_{0:t}, z_{1:t-1}, u_{1:t}) = p(z_t \mid x_t)$$
$$p(x_t \mid x_{1:t-1}, z_{1:t-1}, u_{1:t}) = p(x_t \mid x_{t-1}, u_t)$$

Underlying Assumptions
- Static world
- Independent noise
- Perfect model, no approximation errors

Bayes Filters

z = observation
u = action
x = state

$$Bel(x_t) = P(x_t \mid u_1, z_1 \ldots, u_t, z_t)$$

Bayes
$$= \eta\ P(z_t \mid x_t, u_1, z_1, \ldots, u_t)\ P(x_t \mid u_1, z_1, \ldots, u_t)$$

Markov
$$= \eta\ P(z_t \mid x_t)\ P(x_t \mid u_1, z_1, \ldots, u_t)$$

Total prob.
$$= \eta\ P(z_t \mid x_t) \int P(x_t \mid u_1, z_1, \ldots, u_t, x_{t-1})$$
$$P(x_{t-1} \mid u_1, z_1, \ldots, u_t)\, dx_{t-1}$$

Markov
$$= \eta\ P(z_t \mid x_t) \int P(x_t \mid u_t, x_{t-1})\ P(x_{t-1} \mid u_1, z_1, \ldots, u_t)\, dx_{t-1}$$

$$= \eta\ P(z_t \mid x_t) \int P(x_t \mid u_t, x_{t-1})\ Bel(x_{t-1})\, dx_{t-1}$$

$$Bel(x_t) = \eta\ P(z_t \mid x_t) \int P(x_t \mid u_t, x_{t-1})\ Bel(x_{t-1})\, dx_{t-1}$$

1. Algorithm **Bayes_filter**(*Bel(x),d*):
2. η=0
3. If *d* is a perceptual data item *z* then
4. For all *x* do
5. $Bel'(x) = P(z \mid x) Bel(x)$
6. $\eta = \eta + Bel'(x)$
7. For all *x* do
8. $Bel'(x) = \eta^{-1} Bel'(x)$
9. Else if *d* is an action data item *u* then
10. For all *x* do
11. $Bel'(x) = \int P(x \mid u, x')\ Bel(x')\, dx'$
12. Return *Bel'(x)*

Dynamic Environments

- Two possible locations x_1 and x_2
- P(x_1)=0.99
- P(z|x_2)=*0.09* P(z|x_1)=*0.07*



Bayes Filters for Robot Localization

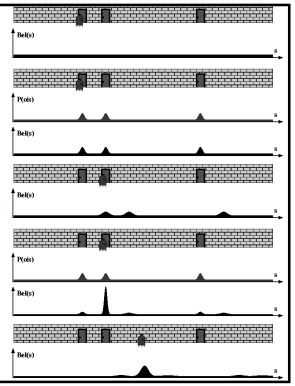

Representations for Bayesian Robot Localization

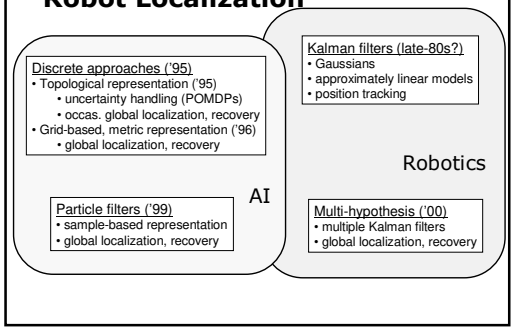

Bayes Filters are Familiar!

$$Bel(x_t) = \eta \; P(z_t \mid x_t) \int P(x_t \mid u_t, x_{t-1}) \; Bel(x_{t-1}) \; dx_{t-1}$$

- Kalman filters
- Particle filters
- Hidden Markov models
- Dynamic Bayesian networks
- Partially Observable Markov Decision Processes (POMDPs)

Summary

- Bayes rule allows us to compute probabilities that are hard to assess otherwise.
- Under the Markov assumption, recursive Bayesian updating can be used to efficiently combine evidence.
- Bayes filters are a probabilistic tool for estimating the state of dynamic systems.