

# CSE 573: Artificial Intelligence

## Winter 2019

### Bayes Nets

Hanna Hajishirzi

Many slides adapted from Pieter Abbeel, Dan Klein, Dan Weld, Stuart Russell, Andrew Moore & Luke Zettlemoyer

# Probabilistic Models

---


- Models describe how (a portion of) the world works
- **Models are always simplifications**
  - May not account for every variable
  - May not account for all interactions between variables
  - “All models are wrong; but some are useful.”
    - George E. P. Box
- **What do we do with probabilistic models?**
  - We (or our agents) need to reason about unknown variables, given evidence
  - Example: explanation (diagnostic reasoning)
  - Example: prediction (causal reasoning)

# Bayes' Nets: Big Picture


---

- Two problems with using full joint distribution tables as our probabilistic models:
  - Unless there are only a few variables, the joint is WAY too big to represent explicitly
  - Hard to learn (estimate) anything empirically about more than a few variables at a time
- **Bayes' nets:** a technique for describing complex joint distributions (models) using simple, local distributions (conditional probabilities)
  - More properly called **graphical models**
  - We describe how variables locally interact
  - Local interactions chain together to give global, indirect interactions

# Example Bayes' Net: Car

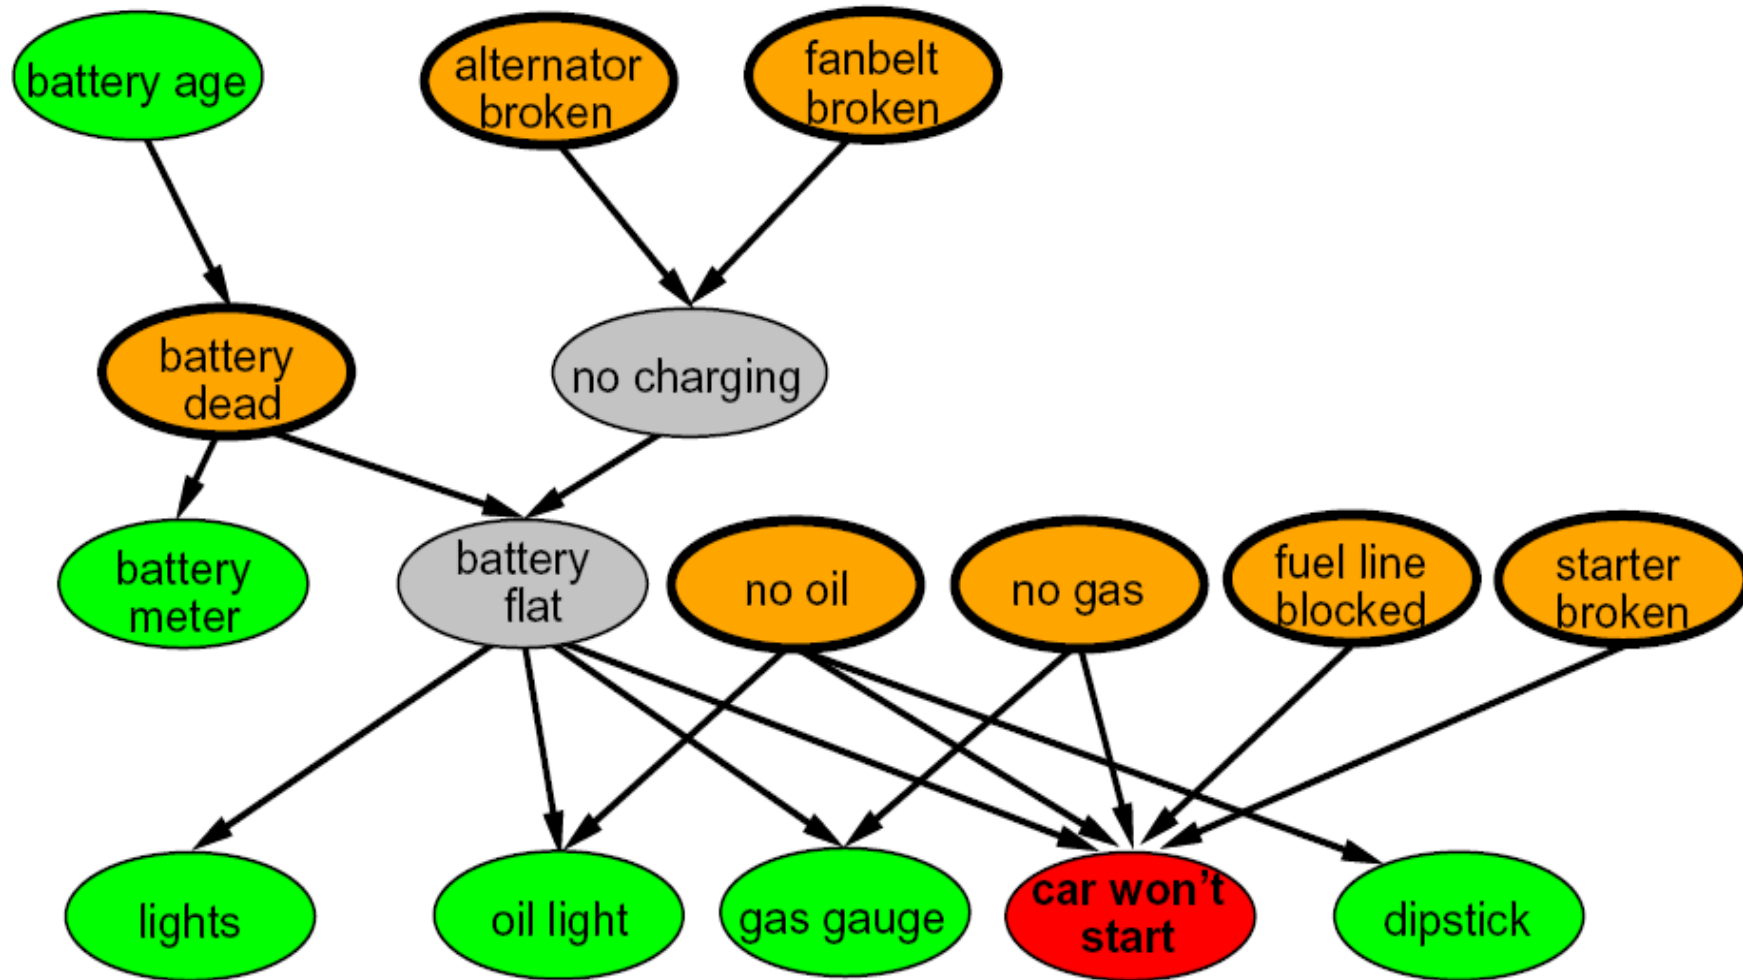


# Example Bayes' Net: Insurance

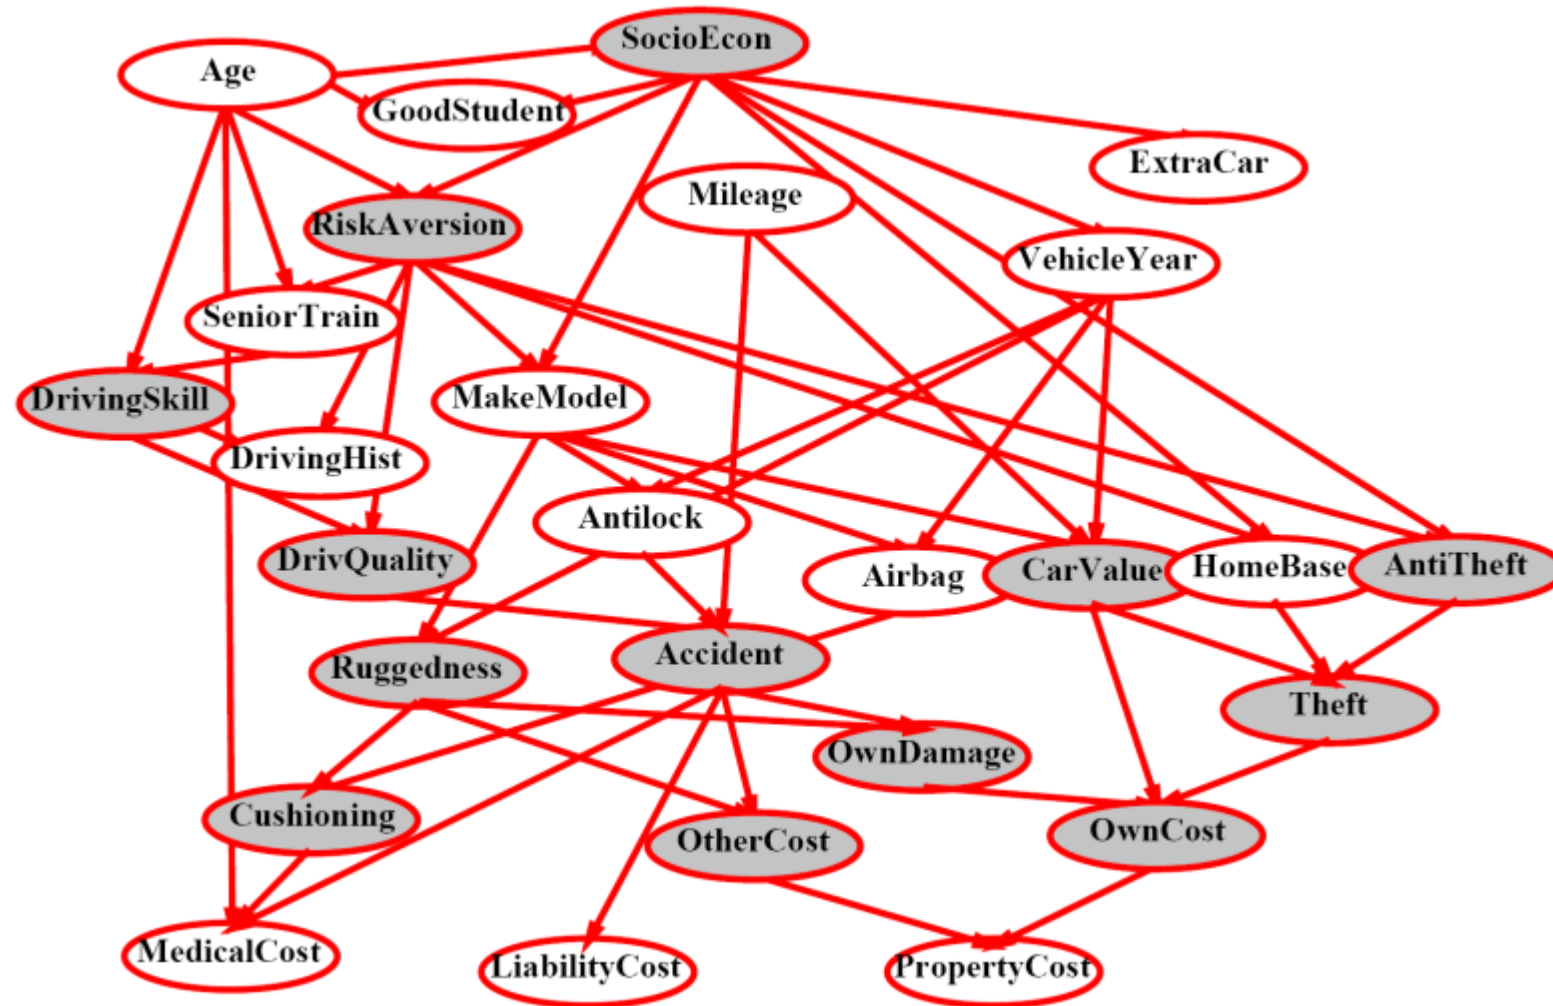

# Graphical Model Notation

- **Nodes: variables (with domains)**
  - Can be assigned (observed) or unassigned (unobserved)
- **Arcs: interactions**
  - Indicate “direct influence” between variables
  - Formally: encode conditional independence (more later)
- For now: imagine that arrows mean direct causation (in general, they don't!)

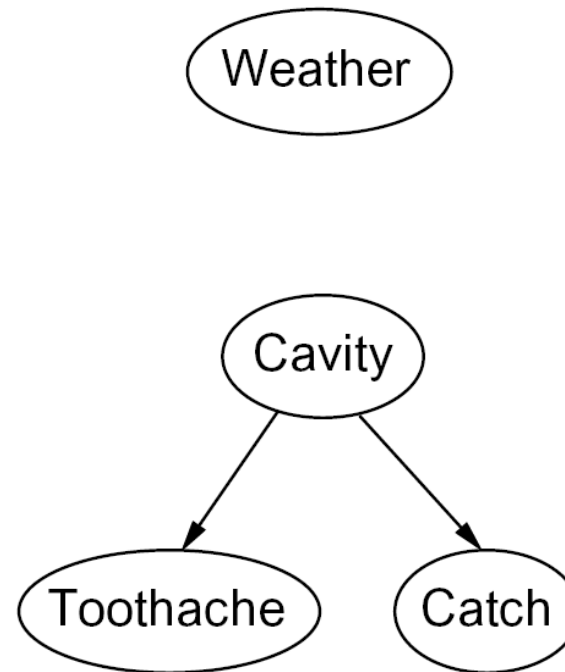

# Example: Coin Flips

---

- N independent coin flips





- No interactions between variables: **absolute independence**

# Example: Traffic



- Variables:

- R: It rains
- T: There is traffic

- Model 1: independence



- Model 2: rain causes traffic

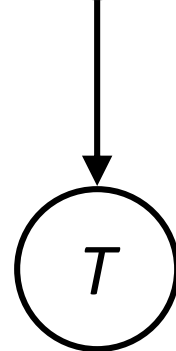


- Which one is better?



# Example: Alarm Network

- Variables

- B: Burglary
- A: Alarm goes off
- M: Mary calls
- J: John calls
- E: Earthquake!

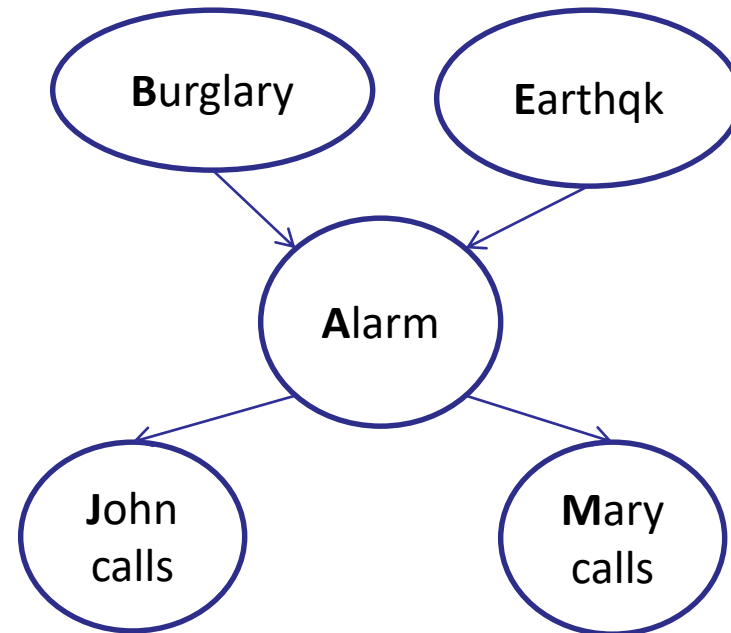


# Bayes' Net Semantics

- A set of nodes, one per variable  $X$
- A directed, acyclic graph
- A conditional distribution for each node
  - A collection of distributions over  $X$ , one for each combination of parents' values

$$P(X|a_1 \dots a_n)$$

- CPT: conditional probability table
- Description of a noisy “causal” process

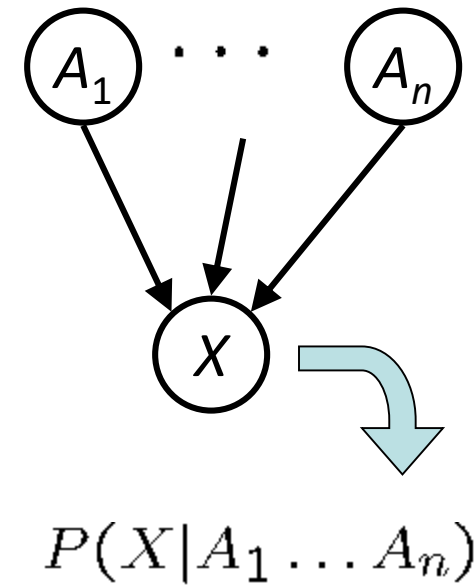

*A Bayes net = Topology (graph) + Local Conditional Probabilities*

# Probabilities in BNs




- Bayes' nets **implicitly** encode joint distributions
  - As a product of local conditional distributions
  - To see what probability a BN gives to a full assignment, multiply all the relevant conditionals together:

$$P(x_1, x_2, \dots, x_n) = \prod_{i=1}^n P(x_i | \text{parents}(X_i))$$

- Example:

$P(+cavity, +catch, -toothache)$

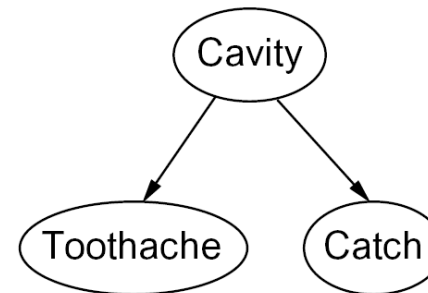

# Probabilities in BNs

- Why are we guaranteed that setting

$$P(x_1, x_2, \dots, x_n) = \prod_{i=1}^n P(x_i | \text{parents}(X_i))$$

results in a proper joint distribution?


- Chain rule (valid for all distributions):  $P(x_1, x_2, \dots, x_n) = \prod_{i=1}^n P(x_i | x_1 \dots x_{i-1})$

- Assume conditional independences:  $P(x_i | x_1, \dots, x_{i-1}) = P(x_i | \text{parents}(X_i))$

→ Consequence:  $P(x_1, x_2, \dots, x_n) = \prod_{i=1}^n P(x_i | \text{parents}(X_i))$

- Not every BN can represent every joint distribution
  - The topology enforces certain conditional independencies


# Example: Coin Flips

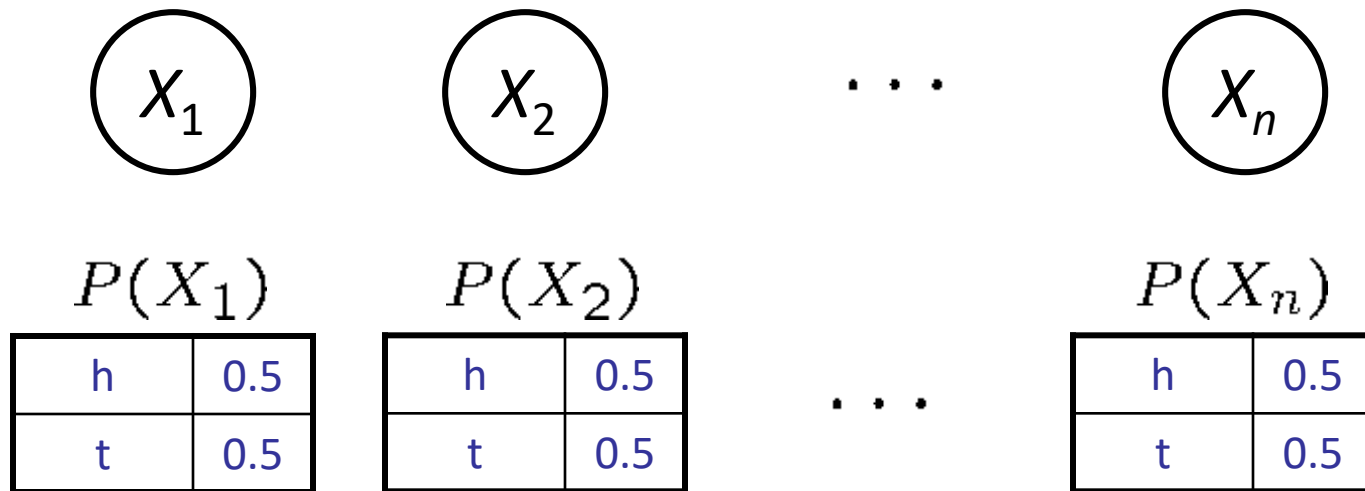

$$P(h, h, t, h) = P(X_1 = h)P(X_2 = h)P(X_3 = t)P(X_4 = h)$$

*Only distributions whose variables are absolutely independent can be represented by a Bayes' net with no arcs.*

# Example: Traffic

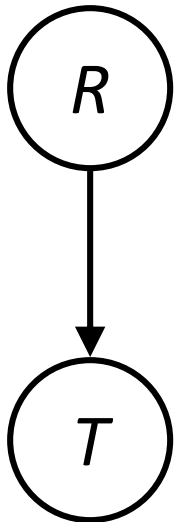
$$P(R)$$

+r	1/4
-r	3/4

$$P(T|R)$$

+r	+t	3/4
+r	-t	1/4
-r	+t	1/2
-r	-t	1/2


$$P(+r, -t) =$$

$$P(R = +r)P(T = -t|R = +r)$$

$$P(+r)P(-t|+r)$$

# Example: Alarm Network

B	P(B)
+b	0.001
-b	0.999

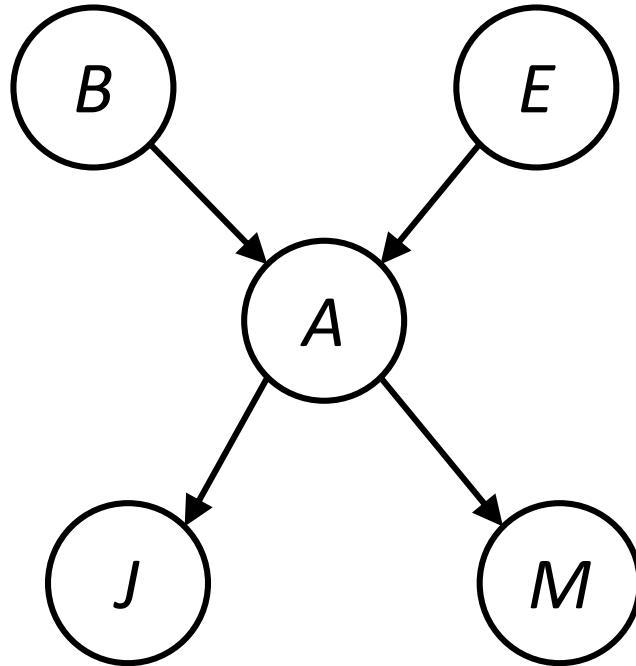

E	P(E)
+e	0.002
-e	0.998

A	M	P(M A)
+a	+m	0.7
+a	-m	0.3
-a	+m	0.01
-a	-m	0.99




A	J	P(J A)
+a	+j	0.9
+a	-j	0.1
-a	+j	0.05
-a	-j	0.95

B	E	A	P(A B,E)
+b	+e	+a	0.95
+b	+e	-a	0.05
+b	-e	+a	0.94
+b	-e	-a	0.06
-b	+e	+a	0.29
-b	+e	-a	0.71
-b	-e	+a	0.001
-b	-e	-a	0.999

$$P(+b, -e, +a, -j, +m) =$$

# Example: Alarm Network

B	P(B)
+b	0.001
-b	0.999

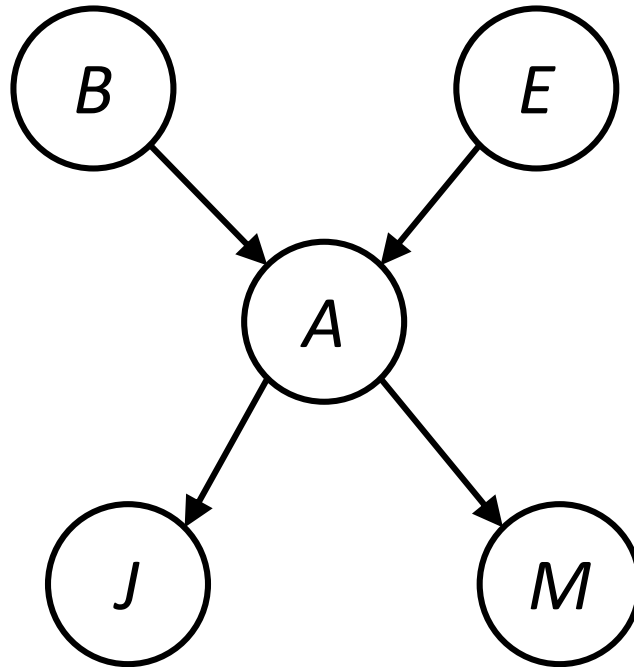

E	P(E)
+e	0.002
-e	0.998

A	M	P(M A)
+a	+m	0.7
+a	-m	0.3
-a	+m	0.01
-a	-m	0.99



A	J	P(J A)
+a	+j	0.9
+a	-j	0.1
-a	+j	0.05
-a	-j	0.95


B	E	A	P(A B,E)
+b	+e	+a	0.95
+b	+e	-a	0.05
+b	-e	+a	0.94
+b	-e	-a	0.06
-b	+e	+a	0.29
-b	+e	-a	0.71
-b	-e	+a	0.001
-b	-e	-a	0.999

$$\begin{aligned}
 &P(+b, -e, +a, -j, +m) = \\
 &P(+b)P(-e)P(+a|+b, -e)P(-j|+a)P(+m|+a) = \\
 &0.001 \times 0.998 \times 0.94 \times 0.1 \times 0.7
 \end{aligned}$$



# Example: Traffic

- Causal direction

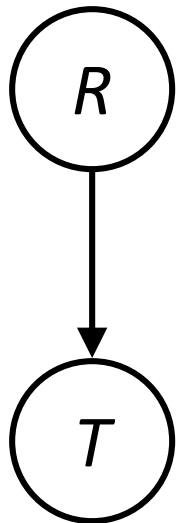

$P(R)$

+r	1/4
-r	3/4

$P(T|R)$

+r	+t	3/4
	-t	1/4


-r	+t	1/2
	-t	1/2

$P(T, R)$

+r	+t	3/16
+r	-t	1/16
-r	+t	6/16
-r	-t	6/16

# Example: Reverse Traffic

- Reverse causality?

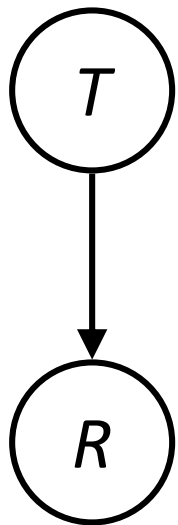

$P(T)$

+t	9/16
-t	7/16

$P(R|T)$

+t	+r	1/3
	-r	2/3

-t	+r	1/7
	-r	6/7

$P(T, R)$

+r	+t	3/16
+r	-t	1/16
-r	+t	6/16
-r	-t	6/16

# Causality?

- When Bayes' nets reflect the true causal patterns:
  - Often simpler (nodes have fewer parents)
  - Often easier to think about
  - Often easier to elicit from experts
- BNs need not actually be causal
  - Sometimes no causal net exists over the domain (especially if variables are missing)
  - E.g. consider the variables *Traffic* and *Drips*
  - End up with arrows that reflect correlation, not causation
- What do the arrows really mean?
  - Topology may happen to encode causal structure
  - **Topology really encodes conditional independence**

$$P(x_i | x_1, \dots, x_{i-1}) = P(x_i | \text{parents}(X_i))$$

# Bayes' Nets

- A Bayes' net is an efficient encoding of a probabilistic model of a domain



- Questions we can ask:

- Inference: given a fixed BN, what is  $P(X \mid e)$ ?
- Representation: given a BN graph, what kinds of distributions can it encode?
- Modeling: what BN is most appropriate for a given domain?

# Bayes' Net Semantics

- A directed, acyclic graph, one node per random variable
- A conditional probability table (CPT) for each node
  - A collection of distributions over  $X$ , one for each combination of parents' values

$$P(X|a_1 \dots a_n)$$

- Bayes' nets implicitly encode joint distributions
  - As a product of local conditional distributions
  - To see what probability a BN gives to a full assignment, multiply all the relevant conditionals together:

$$P(x_1, x_2, \dots, x_n) = \prod_{i=1}^n P(x_i | \text{parents}(X_i))$$

# Bayes' Nets

---

- ✓ Representation
  - Probabilistic Inference
  - Conditional Independences
  - Learning Bayes' Nets from Data

# Inference

---

- Inference: calculating some useful quantity from a joint probability distribution

- Examples:

- Posterior probability

$$P(Q|E_1 = e_1, \dots, E_k = e_k)$$

- Most likely explanation:

$$\operatorname{argmax}_q P(Q = q|E_1 = e_1 \dots)$$

# Inference by Enumeration

- General case:

- Evidence variables:  $E_1 \dots E_k = e_1 \dots e_k$
  - Query\* variable:  $Q$
  - Hidden variables:  $H_1 \dots H_r$
- }  $X_1, X_2, \dots, X_n$   
All variables

- We want:


$$P(Q|e_1 \dots e_k)$$

*\* Works fine with multiple query variables, too*

- Step 1: Select the entries consistent with the evidence

- Step 2: Sum out H to get joint of Query and evidence

- Step 3: Normalize

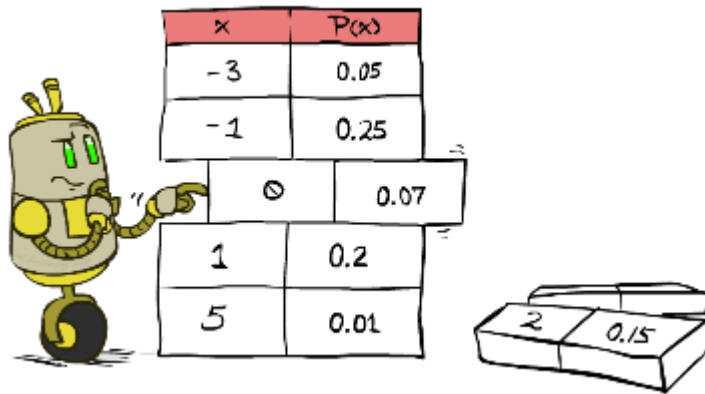

$$\times \frac{1}{Z}$$

$$P(Q, e_1 \dots e_k) = \sum_{h_1 \dots h_r} P(Q, \underbrace{h_1 \dots h_r}_{X_1, X_2, \dots, X_n}, e_1 \dots e_k)$$

$$Z = \sum_q P(Q, e_1 \dots e_k)$$

$$P(Q|e_1 \dots e_k) = \frac{1}{Z} P(Q, e_1 \dots e_k)$$



# Inference by Enumeration in Bayes' Net


- Given unlimited time, inference in BNs is easy
- Reminder of inference by enumeration by example:

$$P(B \mid +j, +m) \propto_B P(B, +j, +m)$$

$$= \sum_{e,a} P(B, e, a, +j, +m)$$

$$= \sum_{e,a} P(B)P(e)P(a|B, e)P(+j|a)P(+m|a)$$

$$= P(B)P(+e)P(+a|B, +e)P(+j|+a)P(+m|+a) + P(B)P(+e)P(-a|B, +e)P(+j|-a)P(+m|-a) \\ + P(B)P(-e)P(+a|B, -e)P(+j|+a)P(+m|+a) + P(B)P(-e)P(-a|B, -e)P(+j|-a)P(+m|-a)$$

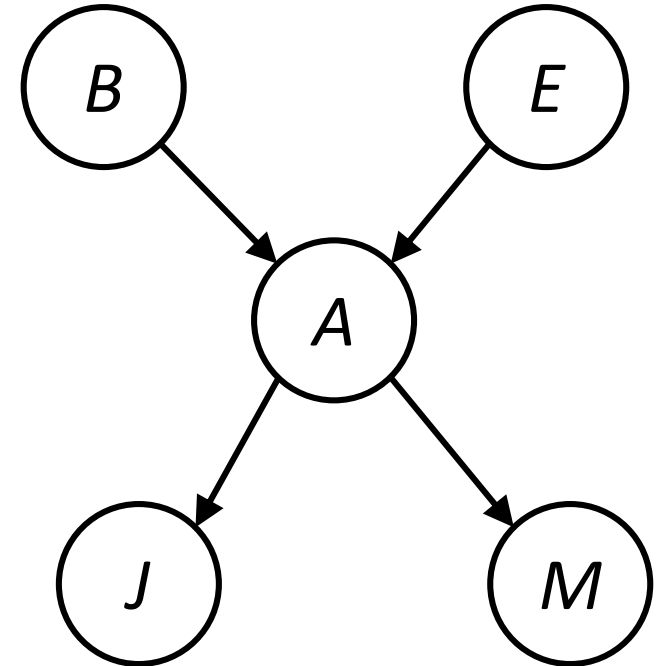

# Size of a Bayes' Net

- How big is a joint distribution over N Boolean variables?

$$2^N$$

- How big is an N-node net if nodes have up to k parents?

$$O(N * 2^{k+1})$$

- Both give you the power to calculate

$$P(X_1, X_2, \dots, X_n)$$

- BNs: Huge space savings!
- Also easier to elicit local CPTs
- Also faster to answer queries (coming)