

# CSE P 501 – Compilers

Parsing & Context-Free Grammars  
Hal Perkins  
Summer 2004

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-1

## Agenda for Today

- Parsing overview
- Context free grammars
- Ambiguous grammars

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-2

## Parsing

- The syntax of most programming languages can be specified by a *context-free grammar* (CGF)
- Parsing: Given a grammar  $G$  and a sentence  $w$  in  $L(G)$ , traverse the derivation (parse tree) for  $w$  in some *standard order* and do *something useful* at each node
  - The tree might not be produced explicitly, but the control flow of a parser corresponds to a traversal


6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-3

## Old Example

```
program ::= statement | program statement
statement ::= assignStmt | ifStmt
assignStmt ::= id = expr ;
ifStmt ::= if ( expr ) stmt
expr ::= id | int | expr + expr
id ::= a | b | c | i | j | k | n | x | y | z
int ::= 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9
```

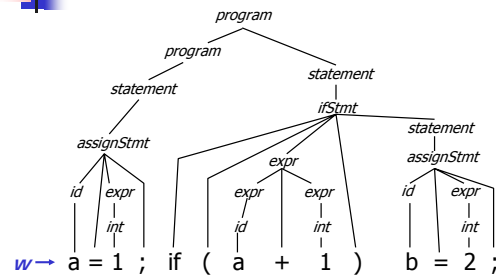

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-4

## "Standard Order"

- For practical reasons we want the parser to be *deterministic* (no backtracking), and we want to examine the source program from *left to right*.
  - (i.e., parse the program in linear time in the order it appears in the source file)

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-5

## Common Orderings

- Top-down
  - Start with the root
  - Traverse the parse tree depth-first, left-to-right (leftmost derivation)
  - LL(k)
- Bottom-up
  - Start at leaves and build up to the root
    - Effectively a rightmost derivation in reverse(!)
  - LR(k) and subsets (LALR(k), SLR(k), etc.)

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-6

## “Something Useful”

- At each point (node) in the traversal, perform some *semantic action*
  - Construct nodes of full parse tree (rare)
  - Construct abstract syntax tree (common)
  - Construct linear, lower-level representation (more common in later parts of a modern compiler)
  - Generate target code on the fly (1-pass compiler; not common in production compilers – can’t generate very good code in one pass – but great if you need a quick ‘n dirty working compiler)

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-7

## Context-Free Grammars

- Formally, a grammar  $G$  is a tuple  $\langle N, \Sigma, P, S \rangle$  where
  - $N$  a finite set of non-terminal symbols
  - $\Sigma$  a finite set of terminal symbols
  - $P$  a finite set of productions
    - A subset of  $N \times (N \cup \Sigma)^*$
  - $S$  the *start symbol*, a distinguished element of  $N$ 
    - If not specified otherwise, this is usually assumed to be the non-terminal on the left of the first production

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-8

## Standard Notations

- $a, b, c$  elements of  $\Sigma$
- $w, x, y, z$  elements of  $\Sigma^*$
- $A, B, C$  elements of  $N$
- $X, Y, Z$  elements of  $N \cup \Sigma$
- $\alpha, \beta, \gamma$  elements of  $(N \cup \Sigma)^*$
- $A \rightarrow \alpha$  or  $A ::= \alpha$  if  $\langle A, \alpha \rangle$  in  $P$

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-9

## Derivation Relations (1)

- $\alpha A \gamma \Rightarrow \alpha \beta \gamma$  iff  $A ::= \beta$  in  $P$ 
  - derives
- $A \Rightarrow^* w$  if there is a chain of productions starting with  $A$  that generates  $w$ 
  - transitive closure

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-10

## Derivation Relations (2)

- $w A \gamma \Rightarrow_{lm} w \beta \gamma$  iff  $A ::= \beta$  in  $P$ 
  - derives leftmost
- $\alpha A w \Rightarrow_{rm} \alpha \beta w$  iff  $A ::= \beta$  in  $P$ 
  - derives rightmost
- We will only be interested in leftmost and rightmost derivations – not random orderings

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-11

## Languages

- For  $A$  in  $N$ ,  $L(A) = \{ w \mid A \Rightarrow^* w \}$
- If  $S$  is the start symbol of grammar  $G$ , define  $L(G) = L(S)$

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-12

## Reduced Grammars

- Grammar  $G$  is *reduced* iff for every production  $A ::= \alpha$  in  $G$  there is a derivation
$$S \Rightarrow^* x A z \Rightarrow x \alpha z \Rightarrow^* xyz$$
  - i.e., no production is useless
- Convention: we will use only reduced grammars

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-13

## Ambiguity

- Grammar  $G$  is *unambiguous* iff every  $w$  in  $L(G)$  has a unique leftmost (or rightmost) derivation
  - Fact: unique leftmost or unique rightmost implies the other
- A grammar without this property is *ambiguous*
  - Note that other grammars that generate the same language may be unambiguous
- We need unambiguous grammars for parsing

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-14

## Example: Ambiguous Grammar for Arithmetic Expressions

$$\begin{aligned} \text{expr} ::= & \text{expr} + \text{expr} \mid \text{expr} - \text{expr} \\ & \mid \text{expr} * \text{expr} \mid \text{expr} / \text{expr} \mid \text{int} \\ \text{int} ::= & 0 \mid 1 \mid 2 \mid 3 \mid 4 \mid 5 \mid 6 \mid 7 \mid 8 \mid 9 \end{aligned}$$

- Exercise: show that this is ambiguous
  - How? Show two different leftmost or rightmost derivations for the same string
  - Equivalently: show two different parse trees for the same string

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-15

## Example (cont)

- Give a leftmost derivation of  $2+3*4$  and show the parse tree

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-16

## Example (cont)

- Give a different leftmost derivation of  $2+3*4$  and show the parse tree

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-17

## Another example

- Give two different derivations of  $5+6+7$

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-18

## What's going on here?

- The grammar has no notion of precedence or associativity
- Solution
  - Create a non-terminal for each level of precedence
  - Isolate the corresponding part of the grammar
  - Force the parser to recognize higher precedence subexpressions first

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-19

## Classic Expression Grammar

```
expr ::= expr + term | expr - term | term
term ::= term * factor | term / factor | factor
factor ::= int | ( expr )
int ::= 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7
```

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-20

## Check: Derive $2 + 3 * 4$

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-21

## Check: Derive $5 + 6 + 7$

- Note interaction between left- vs right-recursive rules and resulting associativity

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-22

## Check: Derive $5 + (6 + 7)$

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-23

## Another Classic Example

- Grammar for conditional statements

```
ifStmt ::= if ( cond ) stmt
        | if ( cond ) stmt else stmt
```
- Exercise: show that this is ambiguous
  - How?

6/29/2004

© 2002-04 Hal Perkins & UW CSE

C-24

*ifStm ::= if ( cond ) stm  
          | if ( cond ) stm  
          else stm*

## One Derivation

---

if ( *cond* ) if ( *cond* ) *stm* else *stm*

6/29/2004 © 2002-04 Hal Perkins & UW CSE C-25

*ifStm ::= if ( cond ) stm  
          | if ( cond ) stm  
          else stm*

## Another Derivation

---

if ( *cond* ) if ( *cond* ) *stm* else *stm*

6/29/2004 © 2002-04 Hal Perkins & UW CSE C-26

## Solving if Ambiguity

- Fix the grammar to separate if statements with else clause and if statements with no else
  - Done in Java reference grammar
  - Adds lots of non-terminals
- Use some ad-hoc rule in parser
  - "else matches closest unpaired if"

6/29/2004 © 2002-04 Hal Perkins & UW CSE C-27

## Parser Tools and Operators

- Most parser tools can cope with ambiguous grammars
  - Makes life simpler if used with discipline
- Typically one can specify operator precedence & associativity
  - Allows simpler, ambiguous grammar with fewer nonterminals as basis for generated parser, without creating problems

6/29/2004 © 2002-04 Hal Perkins & UW CSE C-28

## Parser Tools and Ambiguous Grammars

- Possible rules for resolving other problems
  - Earlier productions in the grammar preferred to later ones
  - Longest match used if there is a choice
- Parser tools normally allow for this
  - But be sure that what the tool does is really what you want

6/29/2004 © 2002-04 Hal Perkins & UW CSE C-29

## Coming Attractions

- Next topic: LR parsing
  - Continue reading ch. 3

6/29/2004 © 2002-04 Hal Perkins & UW CSE C-30