

## Projections

1

## Reading

Required:

- ♦ Angel, 5.1-5.5


Further reading:

- ♦ Angel 5.8-5.9
- ♦ Foley, et al, Chapter 5.6 and Chapter 6
- ♦ David F. Rogers and J. Alan Adams, *Mathematical Elements for Computer Graphics*, 2<sup>nd</sup> Ed., McGraw-Hill, New York, 1990, Chapter 2.

2


## 3D Geometry Pipeline

Before being turned into pixels by graphics hardware, a piece of geometry goes through a number of transformations...

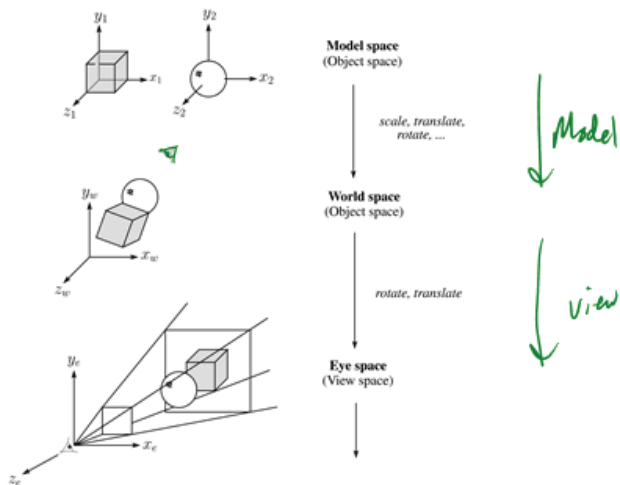

3


## 3D Geometry Pipeline (cont'd)

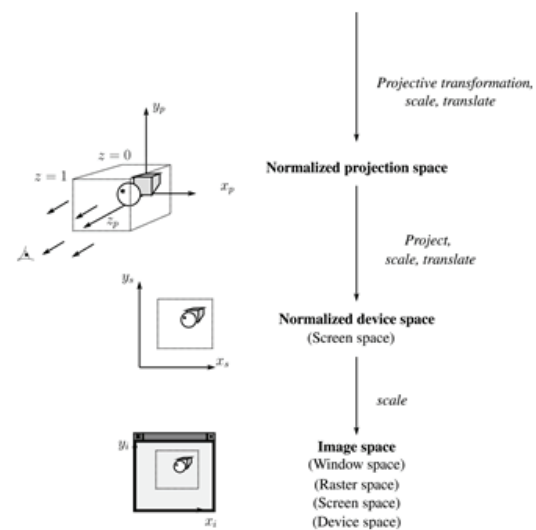

4

## World -> eye transformation

Let's look at how we would compute the world->eye transformation.

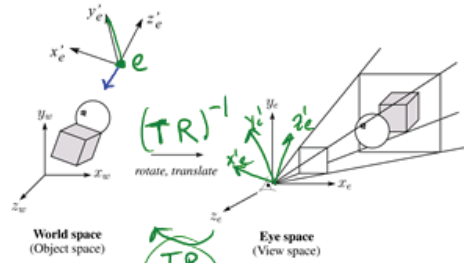

$$R = \begin{pmatrix} \hat{x}'_e & \hat{y}'_e & \hat{z}'_e & \vec{0} \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

$$T(e) \\ (T(e)R)^{-1} = R^{-1}T^{-1}(e) = R^T T(-e)$$

5

## gluLookAt

To specify the world->eye transformation, Open GL has a helper command:

`gluLookAt (eyex, eyey, eyez, atx, aty, atz, upx, upy, upz)`

To simplify notation, we'll re-write as:


`gluLookAt (e, a, u)`

Note that **u** is only required to lie in the  $y'_e - z'_e$  plane.

$$\hat{z}'_e = \frac{e-a}{\|e-a\|}$$

$$\hat{x}'_e = \frac{u \times \hat{z}'_e}{\|u \times \hat{z}'_e\|}$$


$$\hat{y}'_e = \frac{\hat{z}'_e \times \hat{x}'_e}{\|\hat{z}'_e \times \hat{x}'_e\|}$$

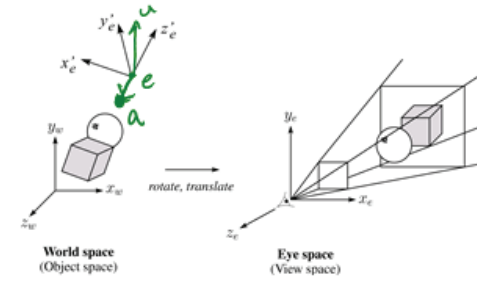


6

## The pinhole camera

The first camera - "camera obscura" - known to Aristotle.

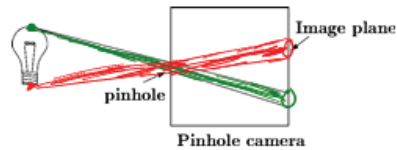

In 3D, we can visualize the blur induced by the pinhole (a.k.a., **aperture**):




Q: How would we reduce blur?

Shrink aperture

7

## Shrinking the pinhole

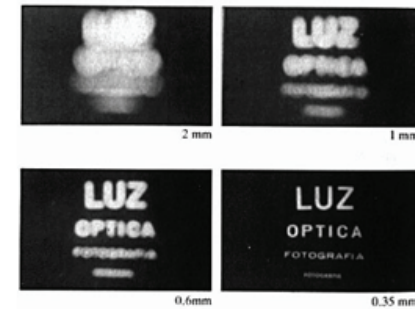

Q: What happens as we continue to shrink the aperture?

8

## Shrinking the pinhole, cont'd



Diffraction





9

## Imaging with the synthetic camera

In practice, pinhole cameras require long exposures, can suffer from diffraction effects, and give an inverted image.

In graphics, none of these physical limitations is a problem.



The image is rendered onto an **image plane** (usually in front of the camera).

Viewing rays emanate from the **center of projection** (COP) at the center of the pinhole.


The image of an object point  $P$  is at the intersection of the viewing ray through  $P$  and the image plane.

10

## Projections

**Projections** transform points in  $n$ -space to  $m$ -space, where  $m < n$ .

In 3-D, we map points from 3-space to the **projection plane** (PP) (a.k.a., image plane) along **projectors** (a.k.a., viewing rays) emanating from the center of projection (COP):

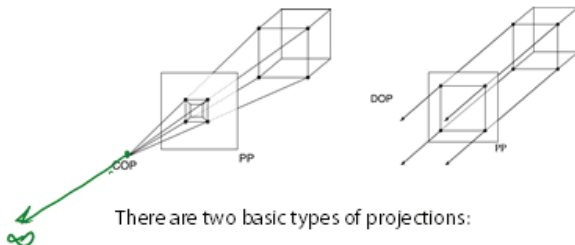

There are two basic types of projections:

- ◆ Perspective – distance from COP to PP finite
- ◆ Parallel – distance from COP to PP infinite

11

## Parallel projections

For parallel projections, we specify a **direction of projection** (DOP) instead of a COP.


There are two types of parallel projection:

- ◆ **Orthographic projection** – DOP perpendicular to PP
- ◆ **Oblique projection** – DOP not perpendicular to PP

We can write orthographic projection onto the  $z=0$  plane with a simple matrix.

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix}$$

Normally, we do not drop the  $z$  value right away. Why not?



12

## Properties of parallel projection


Properties of parallel projection:

- Not realistic looking
- Good for exact measurements
- Are actually a kind of affine transformation
  - Parallel lines remain parallel
  - Ratios are preserved
  - Angles not (in general) preserved
- Most often used in CAD, architectural drawings, etc., where taking exact measurement is important

13

## Derivation of perspective projection

Consider the projection of a point onto the projection plane:



By similar triangles, we can compute how much the x and y coordinates are scaled:

$$\frac{y'}{d} = \frac{y}{-z} \Rightarrow y' = -\frac{d}{z} y$$

$$x' = -\frac{d}{z} x$$

[Note: Angel takes  $d$  to be a negative number, and thus avoids using a minus sign.]

14

## Homogeneous coordinates revisited

Remember how we said that affine transformations work with the last coordinate always set to one.

What happens if the coordinate is not one?

We divide all the coordinates by  $w$ :

$$\begin{bmatrix} x \\ y \\ z \\ w \end{bmatrix} \rightarrow \begin{bmatrix} x/w \\ y/w \\ z/w \\ 1 \end{bmatrix}$$

If  $w = 1$ , then nothing changes.

Sometimes we call this division step the "perspective divide."

15

## Homogeneous coordinates and perspective projection

Now we can re-write the perspective projection as a matrix equation:

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & -1/d & 0 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} = \begin{bmatrix} x \\ y \\ -z/d \end{bmatrix}$$

After division by  $w$ , we get:

$$\begin{bmatrix} x' \\ y' \\ 1 \end{bmatrix} = \begin{bmatrix} -\frac{d}{z} x \\ -\frac{d}{z} y \\ 1 \end{bmatrix}$$


Again, projection implies dropping the  $z$  coordinate to give a 2D image, but we usually keep it around a little while longer.

16

## Projective normalization

After applying the perspective transformation and dividing by  $w$ , we are free to do a simple parallel projection to get the 2D image.


What does this imply about the shape of things after the perspective transformation + divide?

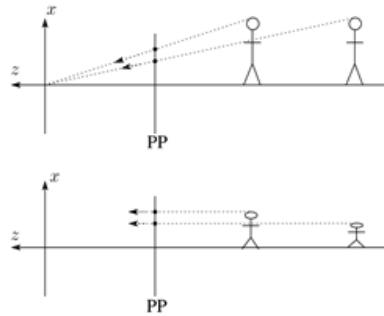

17

## Viewing angle

An alternative to specifying the distance from COP to PP is to specify a viewing angle:



Given the height of the image  $h$  and  $\theta$  what is  $d$ ?


$$d = \frac{h}{2 \tan(\theta/2)} \quad \Leftrightarrow \tan\left(\frac{\theta}{2}\right) = \frac{h/2}{d}$$

What happens to  $d$  as  $\theta$  increases (while  $h$  is constant)?

$d$  gets smaller

18

## Zoom and dolly

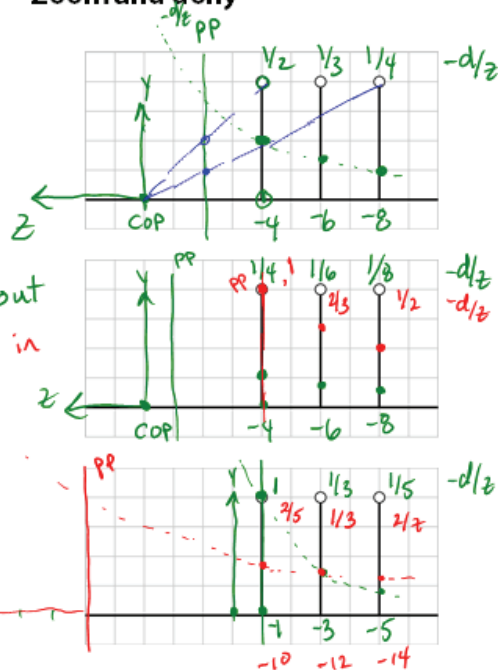

$$d = 2$$

$$d = 1$$

$$d = 4$$

$$d = 1$$


$$d = 4$$

19

## Vanishing points

What happens to two parallel lines that are not parallel to the projection plane?

Think of train tracks receding into the horizon...



The equation for a line is:

$$l = p + tv = \begin{bmatrix} p_x \\ p_y \\ p_z \\ 1 \end{bmatrix} + t \begin{bmatrix} v_x \\ v_y \\ v_z \\ 0 \end{bmatrix} = \begin{bmatrix} p_x + tv_x \\ p_y + tv_y \\ p_z + tv_z \\ 1 \end{bmatrix}$$

After perspective transformation we get:

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} p_x + tv_x \\ p_y + tv_y \\ -(p_z + tv_z)/d \end{bmatrix}$$

20

## Vanishing points (cont'd)

Dividing by  $w$ :

$$\begin{bmatrix} x' \\ y' \\ w' \end{bmatrix} = \begin{bmatrix} -\frac{p_x + tv_x}{p_z + tv_z} d \\ -\frac{p_y + tv_y}{p_z + tv_z} d \\ 1 \end{bmatrix}$$

Letting  $t$  go to infinity:

$$\lim_{t \rightarrow \infty} x' = \lim_{t \rightarrow \infty} -\frac{p_x + tv_x}{p_z + tv_z} d = -\frac{v_x}{v_z} d$$

$$\lim_{t \rightarrow \infty} y' = -\frac{v_y}{v_z} d$$

We get a point!

What happens to the line  $\mathbf{l} = \mathbf{q} + t\mathbf{v}$ ?

Each set of parallel lines intersect at a **vanishing point** on the PP.


Q: How many vanishing points are there?  $\infty$

21

## Clipping and the viewing frustum

The center of projection and the portion of the projection plane that map to the final image form an infinite pyramid. The sides of the pyramid are **clipping planes**.

Frequently, additional clipping planes are inserted to restrict the range of depths. These clipping planes are called the **near** and **far** or the **hither** and **yon** clipping planes.

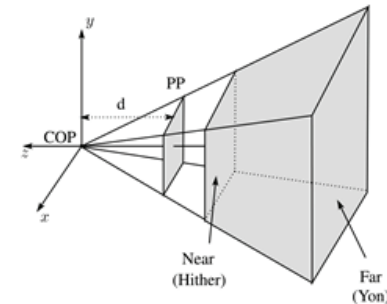

All of the clipping planes bound the the **viewing frustum**.


22

## Properties of perspective projections

The perspective projection is an example of a **projective transformation**.

Here are some properties of projective transformation:

- Lines map to lines
- Parallel lines do not necessarily remain parallel
- Ratios are not preserved




One of the advantages of perspective projection is that size varies inversely with distance – looks realistic.

A disadvantage is that we can't judge distances as exactly as we can with parallel projections.

23

## Human vision and perspective

The human visual system uses a lens to collect light more efficiently, but records perspectively projected images much like a pinhole camera.



Q: Why did nature give us eyes that perform perspective projections?

Q: Do our eyes "see in 3D"?

Stereo  
 occlusion ordering  
 perspective scaling  $\leftrightarrow$  domain knowledge  
 atmospheric effects  
 motion parallax  
 depth of field  
 shading  
 shadows  
 texture

24

## Summary

What to take away from this lecture:

- ◆ All the boldfaced words.
- ◆ An appreciation for the various coordinate systems used in computer graphics.
- ◆ How to compute the world->eye coordinate transformation with `gluLookAt`.
- ◆ How a pinhole camera works.
- ◆ How orthographic projection works.
- ◆ How the perspective transformation works.
- ◆ How we use homogeneous coordinates to represent perspective projections.
- ◆ The properties of vanishing points.
- ◆ The mathematical properties of projective transformations.