
CSE 331


Software Design & Implementation

Kevin Zatloukal
Spring 2022
Generics

Generic Classes

```
class NewSet<T> implements Set<T> {  
  
    // rep invariant:  
    //   non-null, contains no duplicates  
    // ...  
    List<T> theRep;  
    T lastItemInserted;  
  
    ...  
  
}
```

Generics and subtyping

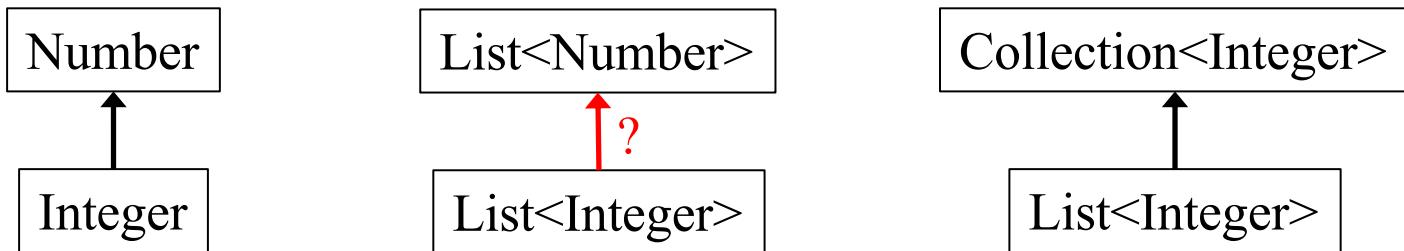

```
interface List<T> extends Collection<T> {  
    boolean add(T elt);  
    T get(int index);  
}
```

Java subtyping is ***invariant*** with respect to generics

- Not covariant and not contravariant
- Neither **List<Number>** nor **List<Integer>** subtype of other

Consequences of invariant subtyping

```
class Utils {  
    static double sumList(List<Number> lst) {  
        double result = 0.0;  
        for (Number n : lst) {  
            result += n.doubleValue();  
        }  
        return result;  
    }  
}
```

Cannot pass `List<Double>` to this method!

- `List<Double>` is not a subtype of `List<Number>`

Generic Methods

```
class Utils {  
    static <T extends Number>  
    double sumList(List<T> lst) {  
        double result = 0.0;  
        for (Number n : lst) { // T also works  
            result += n.doubleValue();  
        }  
        return result;  
    }  
}
```

Can now pass `List<Double>` to this method

- Java can see that this is safe by checking the method body
- generic methods work around limitations of generic classes

Where are we?

- Done:
 - basics of generic types for classes and interfaces
 - basics of *bounding* generics
- Now:
 - generics and *subtyping*
 - generic *methods* [not just using type parameters of class]
 - using *bounds* for more flexible subtyping
 - using *wildcards* for more convenient bounds
 - related digression: Java's *array subtyping*
 - Java realities: type erasure
 - unchecked casts
 - **equals** interactions
 - creating generic arrays

More verbose first

Last Time:

- how to use *type bounds* to write reusable code despite invariant subtyping
- elegant technique using generic methods
- general guidelines for making code as reusable as possible
 - (though not always the most important consideration)

Today: *Java wildcards*

- essentially provide the same expressiveness
- *less verbose*: No need to declare type parameters that would be used only once
- *better style* because Java programmers recognize how wildcards are used for common idioms
 - easier to read (?) once you get used to it

Best type for addAll

```
interface Set<E> {  
    // Adds all elements in c to this set  
    // (that are not already present)  
    void addAll(____ c);  
}  
  
<T extends E> void addAll(Collection<T> c);
```

Can pass a `List<Integer>` to `addAll` for a `Set<Number>`

- `List<Integer>` is a subtype of `Collection<Integer>`
- `Collection<Integer>` is allowed above
 - have `T = Integer` and `E = Number`

Where are we?

- Done:
 - basics of generic types for classes and interfaces
 - basics of *bounding* generics
- Now:
 - generics and *subtyping*
 - generic *methods* [not just using type parameters of class]
 - using *bounds* for more flexible subtyping
 - using *wildcards* for more convenient bounds
 - related digression: Java's *array subtyping*
 - Java realities: type erasure
 - unchecked casts
 - **equals** interactions
 - creating generic arrays

Examples

[Compare to earlier version]

```
interface Set<E> {
    void addAll(Collection<? extends E> c) ;
}
```

- More idiomatic (but equally powerful) compared to
`<T extends E> void addAll(Collection<T> c);`
- More powerful than `void addAll(Collection<E> c);`

Wildcards

Syntax: for a type-parameter instantiation (inside the <...>), can write:

- `? extends Type`, some unspecified subtype of `Type`
- `? is shorthand for ? extends Object`

A wildcard is essentially an *anonymous type variable*

- each `?` stands for some possibly-different unknown type

? versus Object

? indicates a particular but unknown type

```
void printAll(List<?> lst) { ... }
```

Difference between `List<?>` and `List<Object>`:

- can instantiate ? with any type: `Object`, `String`, ...
- `List<Object>` much more restrictive:
 - e.g., wouldn't take a `List<String>`

Difference between `List<Number>` and `List<? extends Number>`:

- can instantiate ? with `Number`, `Integer`, `Double`, ...
- first version is much more restrictive

Non-example

```
<T extends Comparable<T>> T max(Collection<T> c);
```

No change because `T` used *more than once*

- must choose a name to say that two types must match

Wildcards

Syntax: for a type-parameter instantiation (inside the <...>), can write:

- `? extends Type`, some unspecified subtype of `Type`
- `? is shorthand for ? extends Object`

A wildcard is essentially an *anonymous type variable*

- each `?` stands for some possibly-different unknown type
- use a wildcard when you would use a type variable only once (no need to give it a name)
- communicates to readers of your code that the type's "identity" is not needed anywhere else

Wildcards

Syntax: for a type-parameter instantiation (inside the <...>), can write:

- ? **extends Type**, some unspecified subtype of **Type**
- ? is shorthand for ? **extends Object**
- ? **super Type**, some unspecified superclass of **Type**


Wildcard can have lower bounds instead of upper bounds!

- says that ? must be **Type** or a superclass of **Type**

Type Bounds


Upper Bound

? **extends Number**

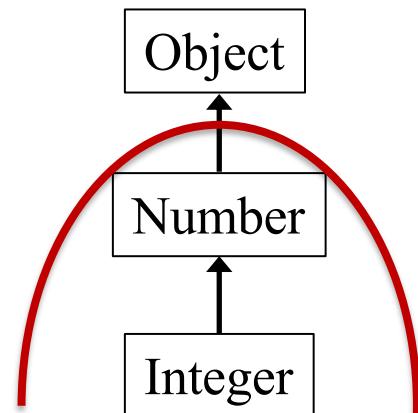

Lower bound

? **super Number**

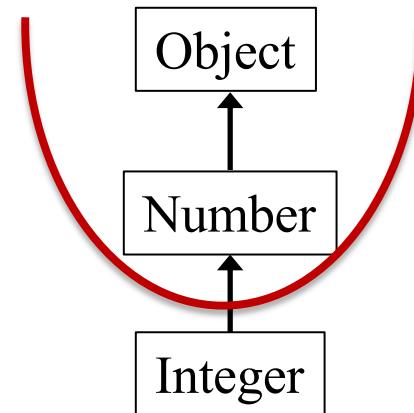

Revisit copy method

First version:

```
<T> void copyTo(List<T> dst, List<T> src) {  
    for (T t : src)  
        dst.add(t);  
}
```

More general version:

```
<T1, T2 extends T1> void copyTo(List<T1> dst,  
                                    List<T2> src) {  
    for (T2 t : src)  
        dst.add(t);  
}
```

More examples

```
<T> void copyTo(List<? super T> dst,
                  List<? extends T> src) {
    for (T t : src)
        dst.add(t);
}
```

Why this works:

- lower bound of **T** for where callee puts values
- upper bound of **T** for where callee gets values
- callers get the subtyping they want
 - Example: `copy(numberList, integerList)`
 - Example: `copy(stringList, stringList)`

PECS: Producer Extends, Consumer Super

Should you use **extends** or **super** or neither?

- use `? extends T` when you *get* values (from a *producer*)
 - no problem if it's a subtype
 - (the co-variant subtyping case)
- use `? super T` when you *put* values (into a *consumer*)
 - no problem if it's a supertype
 - (the contra-variant subtyping case)
- use neither (just `T`, not `?`) if you both *get* and *put*
 - can't be as flexible here

```
<T> void copyTo(List<? super T> dst,  
                  List<? extends T> src);
```

More on lower bounds

- As we've seen, lower-bound ? `super T` is useful for “consumers”
- Upper-bound ? `extends T` could be rewritten without wildcards, but wildcards preferred style where they suffice
- But lower-bound is *only* available for wildcards in Java
 - this does not parse:
`<T super Foo> void m(Bar<T> x);`
 - no good reason for Java not to support such lower bounds except designers decided it wasn't useful enough to bother
 - ¯_(ツ)_/¯

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? extends Integer> lei;
```

First, which of these is legal?

```
lei = new ArrayList<Object>();  
lei = new ArrayList<Number>();  
lei = new ArrayList<Integer>();  
lei = new ArrayList<PositiveInteger>();  
lei = new ArrayList<NegativeInteger>();
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? extends Integer> lei;
```

First, which of these is legal?

```
lei = new ArrayList<Object>();  
lei = new ArrayList<Number>();  
lei = new ArrayList<Integer>();  
lei = new ArrayList<PositiveInteger>();  
lei = new ArrayList<NegativeInteger>();
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? extends Integer> lei;
```

Which of these is legal?
o = lei.get(0);
n = lei.get(0);
i = lei.get(0);
p = lei.get(0);

First, which of these is legal?

```
lei = new ArrayList<Object>();  
lei = new ArrayList<Number>();  
lei = new ArrayList<Integer>();  
lei = new ArrayList<PositiveInteger>();  
lei = new ArrayList<NegativeInteger>();
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? extends Integer> lei;
```

Which of these is legal?

```
o = lei.get(0);  
n = lei.get(0);  
i = lei.get(0);  
p = lei.get(0);
```

First, which of these is legal?

```
lei = new ArrayList<Object>();  
lei = new ArrayList<Number>();  
lei = new ArrayList<Integer>();  
lei = new ArrayList<PositiveInteger>();  
lei = new ArrayList<NegativeInteger>();
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;
```

```
List<? extends Integer> lei;
```

First, which of these is legal?

```
lei = new ArrayList<Object>();  
lei = new ArrayList<Number>();  
lei = new ArrayList<Integer>();  
lei = new ArrayList<PositiveInteger>();  
lei = new ArrayList<NegativeInteger>();
```

Which of these is legal?

```
o = lei.get(0);  
n = lei.get(0);  
i = lei.get(0);  
p = lei.get(0);  
lei.add(o);  
lei.add(n);  
lei.add(i);  
lei.add(p);  
lei.add(null);
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;
```

```
List<? extends Integer> lei;
```

First, which of these is legal?

```
lei = new ArrayList<Object>();  
lei = new ArrayList<Number>();    lei.add(null);  
lei = new ArrayList<Integer>();  
lei = new ArrayList<PositiveInteger>();  
lei = new ArrayList<NegativeInteger>();
```

Which of these is legal?

```
o = lei.get(0);  
n = lei.get(0);  
i = lei.get(0);  
p = lei.get(0);  
lei.add(o);  
lei.add(n);  
lei.add(i);  
lei.add(p);  
lei.add(null);
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? super Integer> lsi;
```

First, which of these is legal?

```
lsi = new ArrayList<Object>;  
lsi = new ArrayList<Number>;  
lsi = new ArrayList<Integer>;  
lsi = new ArrayList<PositiveInteger>;  
lsi = new ArrayList<NegativeInteger>;
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? super Integer> lsi;
```

First, which of these is legal?

```
lsi = new ArrayList<Object>;  
lsi = new ArrayList<Number>;  
lsi = new ArrayList<Integer>;  
lsi = new ArrayList<PositiveInteger>;  
lsi = new ArrayList<NegativeInteger>;
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? super Integer> lsi;
```

Which of these is legal?
lsi.add(o);
lsi.add(n);
lsi.add(i);
lsi.add(p);
lsi.add(null);

First, which of these is legal?

```
lsi = new ArrayList<Object>;  
lsi = new ArrayList<Number>;  
lsi = new ArrayList<Integer>;  
lsi = new ArrayList<PositiveInteger>;  
lsi = new ArrayList<NegativeInteger>;
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? super Integer> lsi;
```

Which of these is legal?
~~lsi.add(o);~~
~~lsi.add(n);~~
lsi.add(i);
lsi.add(p);
lsi.add(null);

First, which of these is legal?

```
lsi = new ArrayList<Object>;  
lsi = new ArrayList<Number>;  
lsi = new ArrayList<Integer>;  
lsi = new ArrayList<PositiveInteger>;  
lsi = new ArrayList<NegativeInteger>;
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;  
  
List<? super Integer> lsi;
```

First, which of these is legal?

```
lsi = new ArrayList<Object>;  
lsi = new ArrayList<Number>;  
lsi = new ArrayList<Integer>;  
lsi = new ArrayList<PositiveInteger>;  
lsi = new ArrayList<NegativeInteger>;
```

Which of these is legal?

```
lsi.add(o);  
lsi.add(n);  
lsi.add(i);  
lsi.add(p);  
lsi.add(null);  
o = lsi.get(0);  
n = lsi.get(0);  
i = lsi.get(0);  
p = lsi.get(0);
```

Legal operations on wildcard types

```
Object o;  
Number n;  
Integer i;  
PositiveInteger p;
```

```
List<? super Integer> lsi;
```

First, which of these is legal?

```
lsi = new ArrayList<Object>;  
lsi = new ArrayList<Number>;  
lsi = new ArrayList<Integer>;  
lsi = new ArrayList<PositiveInteger>;  
lsi = new ArrayList<NegativeInteger>;
```

Which of these is legal?

```
lsi.add(o);  
lsi.add(n);  
lsi.add(i);  
lsi.add(p);  
lsi.add(null);  
o = lsi.get(0);  
n = lsi.get(0);  
i = lsi.get(0);  
p = lsi.get(0);
```

Where are we?

- Done:
 - basics of generic types for classes and interfaces
 - basics of *bounding* generics
- Now:
 - generic *methods* [not just using type parameters of class]
 - generics and *subtyping*
 - using *bounds* for more flexible subtyping
 - using *wildcards* for more convenient bounds
 - related digression: Java's *array subtyping*
 - Java realities: type erasure
 - unchecked casts
 - **equals** interactions
 - creating generic arrays



Java arrays

We know how to use arrays:

- declare an array holding **Type** elements: **Type []**
- get an element: **x[i]**
- set an element **x[i] = e;**

Java included the syntax above because it's common and concise

But can reason about how it should work the same as this:

```
class Array<T> {  
    public T get(int i) { ... “magic” ... }  
    public T set(T newVal, int i) {... “magic” ...}  
}
```

So: If **Type1** is a subtype of **Type2**, how should **Type1 []** and **Type2 []** be related??

Java Arrays

- Given everything we have learned, if **Type1** is a subtype of **Type2**, then **Type1 []** and **Type2 []** should be unrelated
 - invariant subtyping for generics
 - because arrays are mutable




Surprise!

- Given everything we have learned, if **Type1** is a subtype of **Type2**, then **Type1 []** and **Type2 []** should be unrelated
 - invariant subtyping for generics
 - because arrays are mutable
- But in Java, if **Type1** is a subtype of **Type2**,
then **Type1 []** is a subtype of **Type2 []** (covariant subtyping)
 - not true subtyping: the subtype does not support setting an array element to hold a **Type2** (spoiler: throws an exception)
 - Java (and C#) made this decision in pre-generics days
 - needed to write reusable sorting routines, etc.
 - also $\neg \backslash (\forall) /$

What can happen: the good

Programmers can use this subtyping to “do okay stuff”

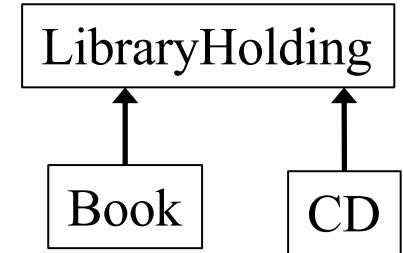

```
void maybeSwap(LibraryHolding[] arr) {  
    if(arr[17].dueDate() < arr[34].dueDate())  
        // ... swap arr[17] and arr[34]  
}
```

```
// client with subtype  
Book[] books = ...;  
maybeSwap(books); // relies on covariant  
                  // array subtyping
```


What can happen: the bad

Something in here must go wrong!

```
void replace17(LibraryHolding[] arr,
                LibraryHolding h) {
    arr[17] = h;
}

// client with subtype
Book[] books = ...;
LibraryHolding theWall = new CD("Pink Floyd",
                                 "The Wall", ...);

replace17(books, theWall);
Book b = books[17]; // would hold a CD
b.getChapters(); // so this would fail
```

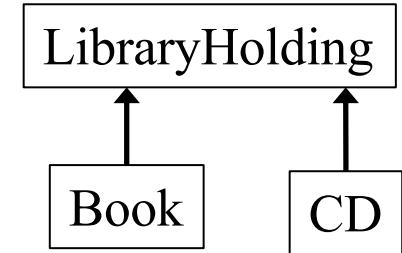

Java's choice

- Java normally guarantees run-time type is a subtype of the compile-time type
 - this was violated for the `Book b` variable
- To preserve the guarantee, Java must never get that far:
 - each array “knows” its actual run-time type (e.g., `Book []`)
 - trying to store a supertype into an index causes **ArrayStoreException** (at run time)
- So the body of `replace17` would raise an exception
 - even though `replace17` is entirely reasonable
 - and fine for plenty of “careful” clients
 - *every Java array-update includes this run-time check*
 - (array-reads never fail this way – why?)
 - beware careful with array subtyping

Where are we?

- Done:
 - basics of generic types for classes and interfaces
 - basics of *bounding* generics
- Now:
 - generic *methods* [not just using type parameters of class]
 - generics and *subtyping*
 - using *bounds* for more flexible subtyping
 - using *wildcards* for more convenient bounds
 - related digression: Java's *array subtyping*
 - Java realities: type erasure
 - unchecked casts
 - `equals` interactions
 - creating generic arrays



Type erasure

All generic types become type `Object` once compiled

```
List<String> lst = new ArrayList<String>();
```

at runtime, becomes

```
List<Object> lst = new ArrayList<Object>();
```

Generics are purely a *compiler* feature!

Type erasure example

```
import java.util.*;  
  
public class Erasure {  
  
    public static void foo() {  
        List<String> lst = new ArrayList<String>();  
        lst.add("abc");  
        lst.add("def");  
    }  
}
```

Type erasure example

Compile-time signature is **add (String)** but the bytecodes say...

```
public static void foo();
Code:
  0: new           #7                  // class java/util/ArrayList
  3: dup
  4: invokespecial #9                // Method java/util/ArrayList."<init>":()V
  7: astore_0
  8: aload_0
  9: ldc            #10               // String abc
 11: invokeinterface #12,  2          // InterfaceMethod java/util/List.add:(Ljava/lang/Object;)V
 16: pop
 17: aload_0
 18: ldc            #18               // String def
 20: invokeinterface #12,  2          // InterfaceMethod java/util/List.add:(Ljava/lang/Object;)V
 25: pop
 26: return
```

Type erasure

All generic types become type `Object` once compiled

- gives backward compatibility (a selling point at time of adoption)
- at run-time, all generic instantiations have the same type

Cannot use `instanceof` to discover a type parameter

```
Collection<?> cs = new ArrayList<String>();  
if (cs instanceof Collection<String>) { // illegal  
    ...  
}
```

Generics and casting

Casting to generic type results in an important warning

```
List<?> lg = new ArrayList<String>(); // ok  
List<String> ls = (List<String>) lg; // warn
```

Compiler gives a warning because this is something the runtime system *will not check for you*

Usually, if you think you need to do this, you're wrong

- a real need to do this is extremely rare

`Object` can also be cast to any generic type ☹

```
public static <T> T badCast(T t, Object o) {  
    return (T) o; // unchecked warning  
}
```

The bottom-line

- Java guarantees a `List<String>` variable always holds a (subtype of) the *raw type* `List`
- Java does not guarantee a `List<String>` variable always has only `String` elements at run-time
 - will be true if no unchecked cast warnings are shown
 - compiler inserts casts to/from `Object` for generics
 - if these casts fail, ***hard-to-debug errors result:*** often far from where conceptual mistake occurred
- So, two reasons not to ignore warnings:
 1. You're violating good style/design/subtyping/generics
 2. You're risking difficult debugging

Recall `equals`

```
class Node {  
    ...  
    @Override  
    public boolean equals(Object obj) {  
        if (!(obj instanceof Node)) {  
            return false;  
        }  
        Node n = (Node) obj;  
        return this.data.equals(n.data);  
    }  
    ...  
}
```

equals for a parameterized class

```
class Node<E> {  
    ...  
    @Override  
    public boolean equals(Object obj) {  
        if (!(obj instanceof Node<E>)) {  
            return false;  
        }  
        Node<E> n = (Node<E>) obj;  
        return this.data.equals(n.data);  
    }  
    ...  
}
```

Erasure: Type arguments do not exist at runtime

equals for a parameterized class

```
class Node<E> {  
    ...  
    @Override  
    public boolean equals(Object obj)  
        if (!(obj instanceof Node<E>))  
            return false;  
        }  
        Node<E> n = (Node<E>) obj;  
        return this.data.equals(n.data);  
    }  
    ...  
}
```

{ More erasure: At run time, do not know what E is and will not be checked, so don't indicate otherwise

equals for a parameterized class

```
class Node<E> {  
    ...  
    @Override  
    public boolean equals(Object obj)  
        if (!(obj instanceof Node<?>))  
            return false;  
        }  
        Node<?> n = (Node<?>) obj;  
        return this.data.equals(n.data);  
    }  
}
```

...Leave it to here to “do the right thing” if **this** and **n** differ on element type

{ Works if the type of obj
{ is **Node<Elephant>**
or **Node<String>** or
...}

Node<? extends Object>

Node<Elephant>

Node<String>

Generics and arrays

```
public class Foo<T> {
    private T aField;          // ok
    private T[] anArray;        // ok

    public Foo() {
        aField = new T();      // compile-time error
        anArray = new T[10];    // compile-time error
    }
}
```

- You cannot create objects or arrays of a parameterized type
 - type info is not available at runtime

Necessary array cast

```
public class Foo<T> {
    private T aField;
    private T[] anArray;

    @SuppressWarnings("unchecked")
    public Foo(T param) {
        aField = param;
        anArray = (T[]) new Object[10];
    }
}
```

You *can* declare variables of type `T`, accept them as parameters, return them, or create arrays by casting `Object[]`

- casting to generic types is not type-safe (hence the warning)
- Effective Java: use `ArrayList` instead

FINAL THOUGHTS

Generics clarify your code

```
interface Map {  
    Object put(Object key, Object value);  
    ...  
}  
  
interface Map<Key,Value> {  
    Value put(Key key, Value value);  
    ...  
}
```

plus casts in client code
→ possibility of run-time errors

- Generics always make the client code prettier and safer
- Generics usually clarify the *implementation*
 - (but sometimes uglify: wildcards, arrays, instantiation)

Tips when writing a generic class

- Think through whether you **really need** to make it generic
 - if it's not really a container, most likely a **mistake**
- Start by writing a concrete instantiation
 - get it correct (testing, reasoning, etc.)
 - consider writing a second concrete version
- Generalize it by adding type parameters
 - think about which types are the same or different
 - the compiler will help you find errors
- It will become easier with practice to write generic from the start