

Projects Unlimited Inc.

3680 Wyse Road Dayton Ohio 45414-5802 Phone: 937-918-2200 FAX: 937-918-2206

Audio@ProjectsUnlimited.com



Part Number: AT-17



Features

P.C. board mounting
Wave solderable and washable
3800 Hz resonant frequency


Electrical Specifications

Resonant Frequency:	3800 Hz
Rated Voltage:	5 Vp-p
Operating Voltage:	1 to 20 Vp-p
Current Consumption:	1 mA
Sound Pressure Level @ 10cm (typ.):	85 dBA
Operating Temperature Range:	-20 to +60 Deg C
Storage Temperature Range:	-30 to +70 Deg C

- Case: Noryl SEI, gray
- Weight: 0.0353 oz. (1 gram)
- P.C. Pins: Copper covered iron with tin plating


Mechanical

Dimensions are in millimeters, tolerance is ± 0.5 unless otherwise specified.

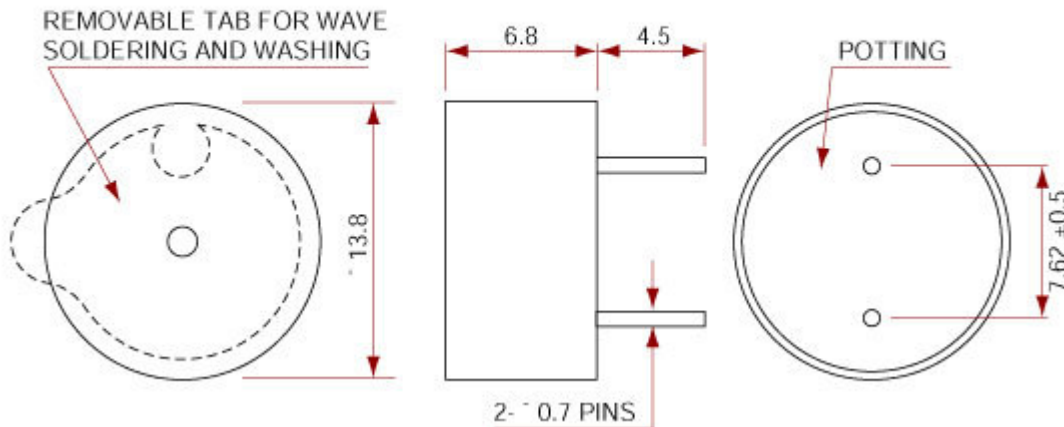

Performance

Typical SPL vs. Frequency

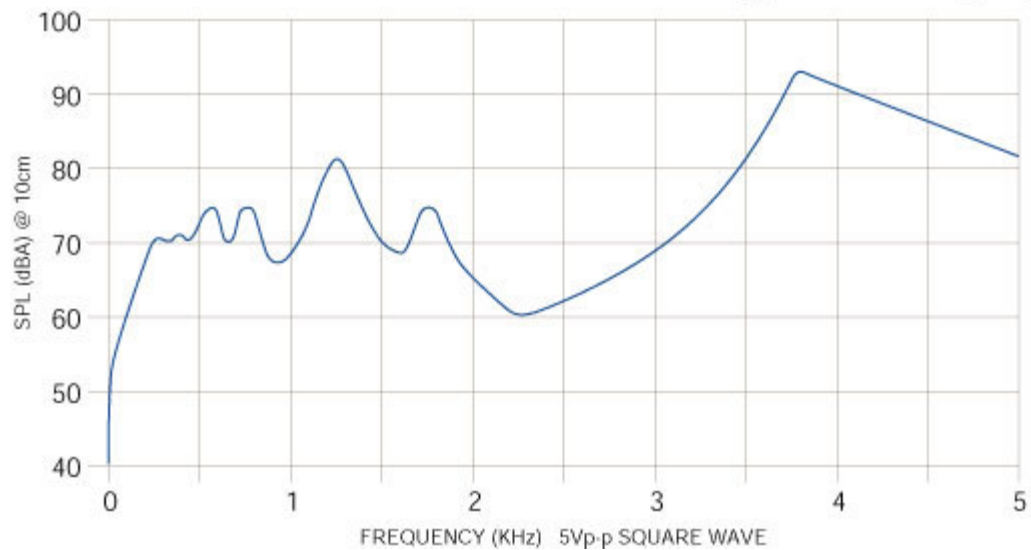

Projects Unlimited Inc.

3680 Wyse Road Dayton, Ohio 45414-5802 Phone: 937-918-2200 FAX: 937-918-2206
Audio@ProjectsUnlimited.com

©2003, Projects Unlimited Inc., All Rights Reserved.
Specifications subject to change without notice.